

# **CLP-2001**

## **User's Manual**

**CITIZEN®**

## **FCC COMPLIANCE STATEMENT FOR AMERICAN USERS**

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

"DESIGNED AND MANUFACTURED TO BE EQUIVALENT TO EUROPEAN  
STANDARD FOR ITE, EN60950."

## **EMI COMPLIANCE STATEMENT FOR CANADIAN USERS**

This equipment generates and uses radio frequency energy and if not installed and used properly, that is, in strict accordance with the manufacturer's instructions, may cause interference to radio and television reception. This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications. This equipment is designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**CAUTION:** Use shielded cables to connect this device to computers.

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.

## **ETAT DE CONFORMITE EMI A L'USAGE DES UTILISATEURS CANADIENS**

Cet équipement produit et utilise l'énergie à radiofréquences et s'il n'est pas installé et utilisé correctement, c'est à dire en accord strict avec les instructions du fabricant, il risque de provoquer des interférences avec la réception de la radio et de la télévision.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la classe A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

Cet équipement est conçu pour fournir une protection satisfaisante contre de telles interférences dans une installation résidentielle. Cependant, il n'y a pas de garantie contre les interférences avec les réceptions radio ou télévision, provoquées par la mise en et hors circuit de l'équipement; aussi, il est demandé à l'utilisateur d'essayer de corriger l'interférence par l'une ou plus des mesures suivantes:

- Réorienter l'antenne de réception.
- Installer l'ordinateur autre part, par égard pour le récepteur.
- Brancher l'ordinateur dans une prise de courant différente de façon à ce que l'ordinateur et le récepteur soient branchés sur des circuits différents.

## Important Safety Instructions

1. Read all of these instructions and save them for later reference.
2. Follow all warnings and instructions marked on the product.
3. Unplug this product from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
4. Do not use this product near water.
5. Do not place this product on an unstable cart, stand or table. The product may fall, causing serious damage to the product.
6. Slots and openings on the cabinet and the back or bottom are provided for ventilation. To ensure reliable operation of the product and to protect it from overheating, do not block or cover these openings. The openings should never be blocked by placing the product on a bed, sofa, rug or other similar surface. This product should never be placed near or over a radiator or heat register. This product should not be placed in a built-in installation unless proper ventilation is provided.
7. This product should be operated from the type of power source indicated on the marking label. If you are not sure of the type of power available, consult your dealer or local power company.
8. This product is equipped with a three-pronged plug, a plug having a third (grounding) pin. This plug will only fit into a grounding-type power outlet. This is a safety feature. If you are unable to insert the plug into the outlet, contact your electrician to replace your obsolete outlet. Do not defeat the safety purpose of the grounding-type plug.
9. Do not allow anything to rest on the power cord. Do not locate this product where the cord will be walked on.
10. If an extension cord is used with this product, make sure that the total of the ampere ratings on the products plugged into the extension cord do not exceed the extension cord ampere rating. Also, make sure that the total of all products plugged into the wall outlet does not exceed 15 amperes for 120V outlet and 7.5 amperes for 220V-240V outlet.
11. Never push objects of any kind into this product through cabinet slots as they may touch dangerous voltage points or short out parts that could result in a risk of fire or electric shock. Never spill liquid of any kind on the product.
12. Except as explained elsewhere in this manual, don't attempt to service this product yourself. Opening and removing those covers that are marked "Do Not Remove" may expose you to dangerous voltage points or other risks. Refer all servicing on those compartments to service personnel.
13. The mains plug on this equipment must be used to disconnect mains power. Please ensure that the socket outlet is installed near the equipment and shall be easily accessible.
14. Unplug this product from the wall outlet and refer servicing to qualified service personnel under the following conditions:
  - A. When the power cord or plug is damaged or frayed.
  - B. If liquid has been spilled into the product.
  - C. If the product has been exposed to rain or water.
  - D. If the product does not operate normally when the operating instructions are followed. Adjust only those controls that are covered by the operating instructions since improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the product to normal operation.
  - E. If the product has been dropped or the cabinet has been damaged.
  - F. If the product exhibits a distinct change in performance, indicating a need for service.

## **Notice**

1. Before use, be sure to read this manual. And keep it handy for reference when needed.
2. The contents of this manual may be changed without prior notice.
3. Reproduction, transfer, or transmission of the contents of this manual without prior consent is strictly prohibited.
4. We are not liable for any damage resulting from the use of the information contained herein, regardless of errors, omissions, or misprints.
5. We are not liable for any problems resulting from the use of optional products and consumable supplies other than the designated products contained herein.
6. Do not handle, disassemble or repair the parts other than those specified in this manual.
7. We are not liable for any damage caused by user's erroneous use of the printer and inadequate environment.
8. Data residing in the printer is temporary. Therefore, all data will be lost if power is lost. We are not liable for any damage or loss of profits cause by data loss due to failures, repairs, inspections, etc.
9. Please contact us if there are any mistakes or ambiguities within this manual.
10. If there are missing or incorrectly collated pages in this manual, contact us to obtain a new manual.

Trademarks or registered trademarks of other companies and products are included in this manual.

# SAFETY SIGNS

— must be strictly observed!

- To prevent personal injury or property damage, the following shall be strictly observed.
- The degree of possible injury and damage due to incorrect use or improperly following instructions specified is described below.



## WARNING

Indicates a situation which, if not observed and handled properly, could result in death or serious injury.



## CAUTION

Indicates a situation which, if not observed and handled properly, could result in injury.



This is a mark to call attention to the reader.



## WARNING

- Never perform the following. If not avoided, these may cause damage or trouble to the printer or cause the printer to overheat and release smoke and cause burns or an electrical shock. If the printer is damaged or is malfunctioning, be sure to turn the power off and remove the power cord from the outlet, then consult our service personnel.
  - Do not jolt or impact to the printer by stepping on, dropping or hitting the printer.
  - Do not place the printer in a poorly ventilated area, or shut off the air vent of the printer.
  - Do not place the printer where chemical reactions occur, such as in laboratories or where air is mixed with salt or gas.
  - Do not use a power voltage or frequency other than those specified.
  - Do not plug/unplug the power cord or attach/detach the interface cable by simply grabbing the power cord or interface cable. Do not pull or carry the printer when the tension of the power cord or interface cable is increased.
  - Do not drop or put foreign matter such as clips and pins into the printer. This may cause problems.
  - Do not plug the power cord into an outlet with many loads.
  - Do not spill drinks such as tea, coffee and juice on the printer or spray insecticide on the printer. If drink or water is spilled, first be sure to turn the power off and remove the power cord from the outlet, then consult our service personnel.
  - Do not disassemble or modify the printer.
- Discard or safely store the plastic packing bag. This bag should be kept away from children. If the bag is pulled over a child's head, it may cause suffocation.

## General precautions

1. Prior to operation, read the safety instructions carefully and observe them.
2. Do not drop any clips, pins or similar metals onto the printer, which may cause problems.
3. Be careful when moving or carrying the printer. Dropping the printer may cause injury or property damage.
4. Do not open the printer cover during printing.
5. When cleaning the surface of the printer case, do not use the cloth soaked in thinner, trichloroethylene, benzene, ketone or similar chemicals.
6. Do not use the printer where there is a lot of oil, iron particles, waste or dust.
7. Do not spill a liquid down the printer or do not spray chemical liquids over the printer.
8. Do not step on or drop or hit the printer; the impact or vibration must be avoided.
9. Operate the control panel properly. A careless, rough handling may cause problems or malfunction. Also, do not use such a sharp-edged tool as ballpoint for operation of the control panel.
10. When installing the auto-cutter drive board, be sure to unplug the power cord from the outlet.
11. If a problem occurs during printing, stop the printer immediately and unplug the power cord from the outlet.
12. When the printer is not in good condition, do not disassemble it. Instead, consult our service personnel.



## Precautions when installing the printer

1. Prior to operation, read the safety instructions carefully and observe them.
2. Do not use or store the printer near fire, excessive moisture, in direct sunlight, near an air conditioner or heater or other source of unusually high or low temperature or high humidity or excessive dust.
3. Do not place the printer where chemical reactions occur, such as in a laboratory.
4. Do not place the printer where air is mixed with salt or gas.
5. The printer must sit on a firm, level surface where there is ample ventilation. Do not allow the printer's air vent to be blocked by a wall or other item.
6. Do not put anything on top the printer.
7. Do not place the printer near a radio or television, and do not use the same wall outlet for the printer and a radio or television. Radio or television reception could be adversely affected.
8. Do not use the voltage and frequency other than the specified values.
9. Do not put anything on top the power cord or do not step on it.
10. Do not pull or move the main body by taking the power cord and interface cable.
11. Avoid putting many loads on one outlet for the power cord.
12. Do not bundle up the power cord when using.
13. Grip by the plug housing, not the cord, to plug/unplug the power cord.
14. Connect the connectors carefully. If they are connected in the wrong polarity, the internal elements may be damaged.
15. Be sure to turn off the power before connecting/disconnecting the interface cable.
16. Avoid extending the interface cable or connecting the printer to any noise-producing computer. If it is unavoidable, take measures, e.g. use the shielded-conductor cable or twisted pair.
17. Ensure that the outlet is near the printer and the power cord is plugged/unplugged easily.
18. Use the three-pin (including grounding prong) outlet. Otherwise, you may get hurt by static electricity.

## Chapters in this manual

- |                  |  |
|------------------|--|
| <b>Chapter 1</b> | <b>Setup</b><br>Describes the packed items after opening the carton as well as the names and functions of parts.                                   |
| <b>Chapter 2</b> | <b>Control Panel</b><br>Describes the necessary items for operations, such as the control panel, printer settings and indications on the LCD/LEDs. |
| <b>Chapter 3</b> | <b>Paper and Ribbon</b><br>Describes the procedures for loading the paper and ribbon including the notes on the use of paper and ribbon.           |
| <b>Chapter 4</b> | <b>Troubleshooting</b><br>Describes corrective actions when problems occur.  |
| <b>Chapter 5</b> | <b>Options</b><br>Describes the optional accessories for this printer.   |
| <b>Chapter 6</b> | <b>Specifications</b><br>Describes the basic specifications and commands for this printer.   |

# Table of Contents

FCC Compliance Statement for American Users . . .	i
EMI Compliance Statement for Canadian Users . . .	ii
Important Safety Instructions . . . . .	iii
Notice . . . . .	iv
Safety Signs . . . . .	v
Warning . . . . .	vi
General precautions . . . . .	vii
Precautions when installing the printer . . . . .	viii
Chapters in this Manual . . . . .	ix
<b>Chapter 1 Setup . . . . .</b>	<b>1-1</b>
1.1 Confirmation of Carton Contents . . . . .	1-2
1.2 Installing the paper holders . . . . .	1-3
1.2 Names and Functions of the Parts . . . . .	1-4
1.3 Connection to Power . . . . .	1-8
1.4 Connection to a Computer . . . . .	1-9
<b>Chapter 2 Control Panel . . . . .</b>	<b>2-1</b>
2.1 Control Panel . . . . .	2-2
2.2 LCD/LED Indications and Adjustment Controls . . . . .	2-3
2.3 Normal Operating Mode . . . . .	2-3
2.4 Printer Setup Mode . . . . .	2-4
2.5 Self-Test Mode . . . . .	2-4
2.6 System Maintenance Mode . . . . .	2-5
<b>Chapter 3 Paper and ribbon. . . . .</b>	<b>3-1</b>
3.1 Kinds of Paper . . . . .	3-2
3.2 Label and Tag Specifications . . . . .	3-2
3.3 Ribbon . . . . .	3-6
3.4 Loading the Paper . . . . .	3-7
3.5 Loading the Ribbon. . . . .	3-9
3.6 Print Head Offset Adjustments . . . . .	3-10
3.7 Ribbon Tension Adjustments . . . . .	3-12
<b>Chapter 4 Troubleshooting . . . . .</b>	<b>4-1</b>
4.1 Error Messages . . . . .	4-2
4.1.1 Error descriptions and indications. . . . .	4-2
4.1.2 Error indications and corrective actions. . . . .	4-4
4.2 Power Troubleshooting . . . . .	4-7
4.3 Paper Feed Troubleshooting . . . . .	4-8
4.4 Ribbon Feed Troubleshooting . . . . .	4-9
4.5 Print Troubleshooting . . . . .	4-10
4.6 Interface Troubleshooting . . . . .	4-11

<b>Chapter 5</b>	<b>Options</b>	<b>5-1</b>
5.1	Auto-Cutter Unit	5-2
5.2	Peeler Unit	5-2
5.3	Adjustable Sensor	5-2
5.4	Memory Card	5-3
5.5	8-in Size Roll Paper Holder	5-4
<b>Chapter 6</b>	<b>Specifications</b>	<b>6-1</b>
6.1	Basic Specifications	6-2
6.2	Interface	6-5
6.2.1	Serial interface system configuration	6-5
6.2.2	Parallel interface system configuration	6-6
6.2.3	RS-232C loopback test	6-7
6.2.4	RS-232C protocol	6-7
6.2.5	Interface pin assignment	6-9
6.3	Outline of Command System	6-11
6.4	Example of Connection to a Computer	6-12
6-5	Tear-Off Function	6-13
6.5.1	Turning Tear ON/OFF	6-13
6.5.2	Tear-off when printing	6-13
6.5.3	Tear-off when feeding	6-14
6.5.4	Tear-off and type of data	6-15
6.5.5	Cut position adjustments	6-15
6.5.6	When "fnnn" command is executed while tear-off function is OFF	6-16
6.5.7	Priority order	6-16

# **Chapter 1**

## **Setup**

- 1.1 Confirmation of Carton Contents 1-2**
- 1.2 Installing the paper holders 1-3**
- 1.3 Names and Functions of the Parts 1-4**
- 1.4 Connection to Power 1-8**
- 1.5 Connection to a Computer 1-9**

## 1.1 Confirmation of Carton Contents




### CAUTION

Be careful when moving or carrying the printer and when taking the printer out of the carton. The printer may cause injury or property damage if dropped. Be sure to hold the printer firmly when taking it out of the carton. Do not grip the printer by the foam packing material which may break, causing the printer to drop.

Check that the following accessories are included with the printer in the carton.

• Printer	1 unit	• Paper holders	1 set	• Roll holder	1 pc
• Power cord	1 pc	• User's manual	1 copy	• Roll guide	1 pc
• Ribbon	1 pc	• Paper core	1 pc	• Cleaning pen	1 pc
• Screws	4 pcs	• Label paper	1 set		

**Note:** The empty carton and packing materials should be stored for future shipping of the printer.

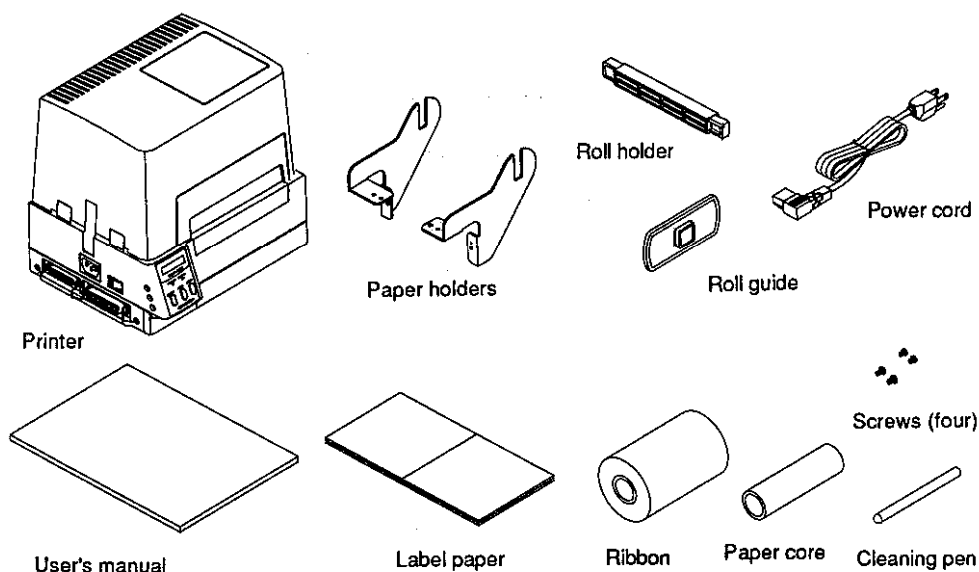


## 1.2 Installing the paper holders

The roll paper of 4 in diam. (101.6 mm diam.) is set on the back of the printer.

### Installation

- 1) Open the printer cover.
- 2) Set the paper holders (accessory) as shown in the figure.
- 3) Secure the paper holders with screws M3 from the top and M4 from the back. (Tightening torque: 6kgf-cm)

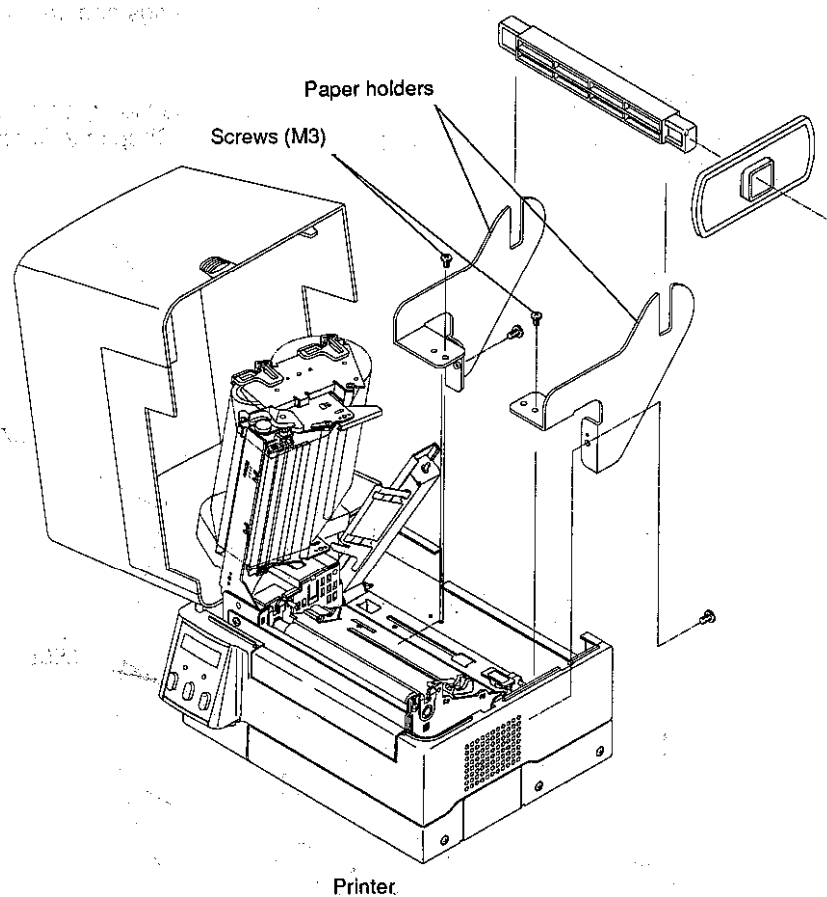

## 1.3 Names and Functions of the Parts

### Front view

#### ■ Control panel

The control panel is a center of the printer that displays printer messages through the LCD and LEDs.

##### 1) LEDs


One LED is the power indicator and the other is the error indicator.

##### 2) LCD

Displays the current printer status, configuration settings and errors.

##### 3) Control keys

The Pause, Feed and Stop keys are arranged from left to right and are used to facilitate printer operating. (For details, see Chapter 2 Control Panel.)

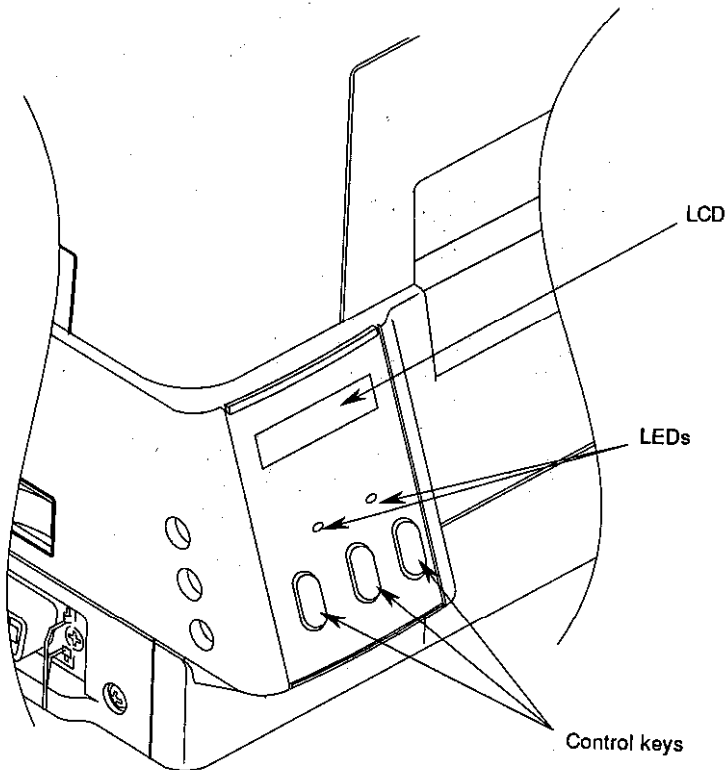




## **Inside view**

- **Printer cover**  
Opens to allow loading of the paper and ribbon.
- **Ribbon holder**  
Holds the ribbon. (See Chapter 3.)
- **Ribbon winder**  
Winds the ribbon after printing. (See Chapter 3.)
- **Roll holder**  
Holds the roll paper.
- **Roll guide**  
Guide the roll paper to be set on the roll holder. The roll guide can be adjusted in accordance with the width of the paper. (See Chapter 3.)
- **Paper holders**  
Hold the roll holder to be inserted in the paper core.
- **Head open lever**  
Opens/closes the print head. This is used when loading the paper and ribbon or when cleaning the print head.
- **Offset verification window**  
Facilitates adjusting the print head position to match the thickness of the paper.
- **Head pressure verification window**  
Facilitates adjusting the print head pressure to match the width of the paper and the paper quality.

(See figure on next page)

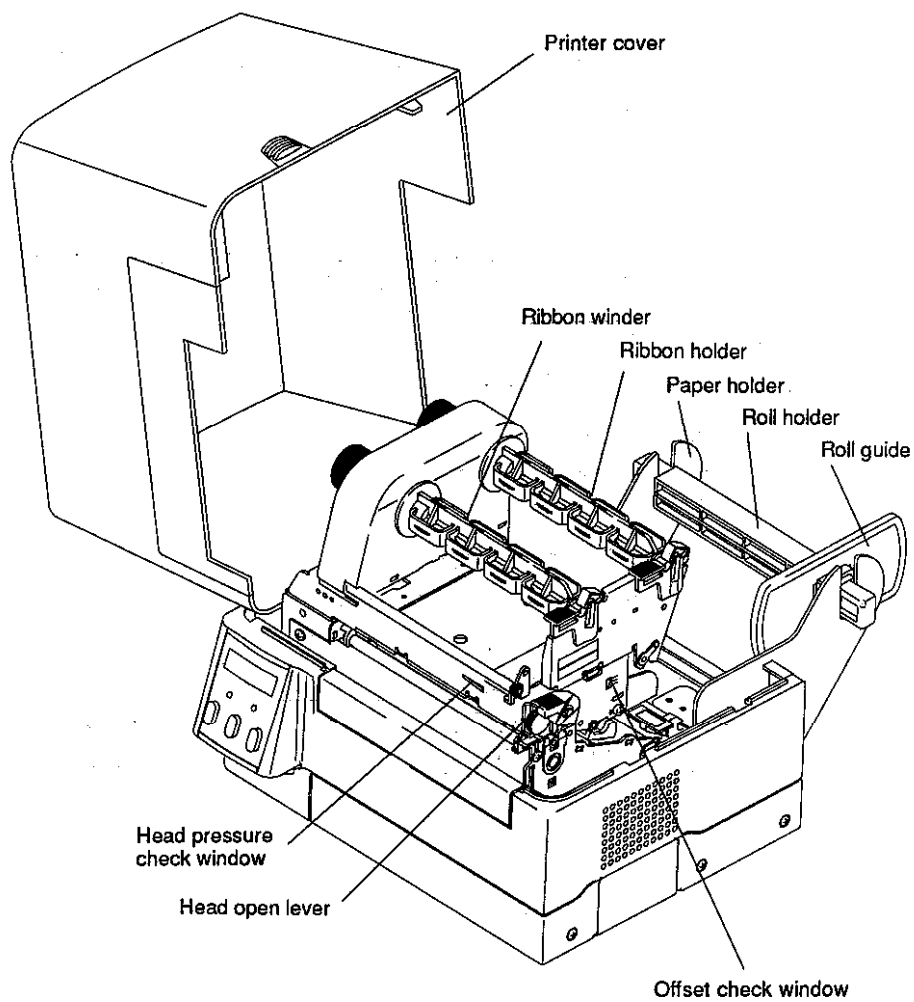

## Side view

- Interface connectors

Connect the interface cables.

- PCMCIA memory card cover


To protect the PCMCIA memory card from exposure to dust and foreign matter. To install a PCMCIA memory card, first unhook this cover, then slide it out.

- Power switch

Turns on/off the power to the printer.

- Power inlet

Connects the power cord.

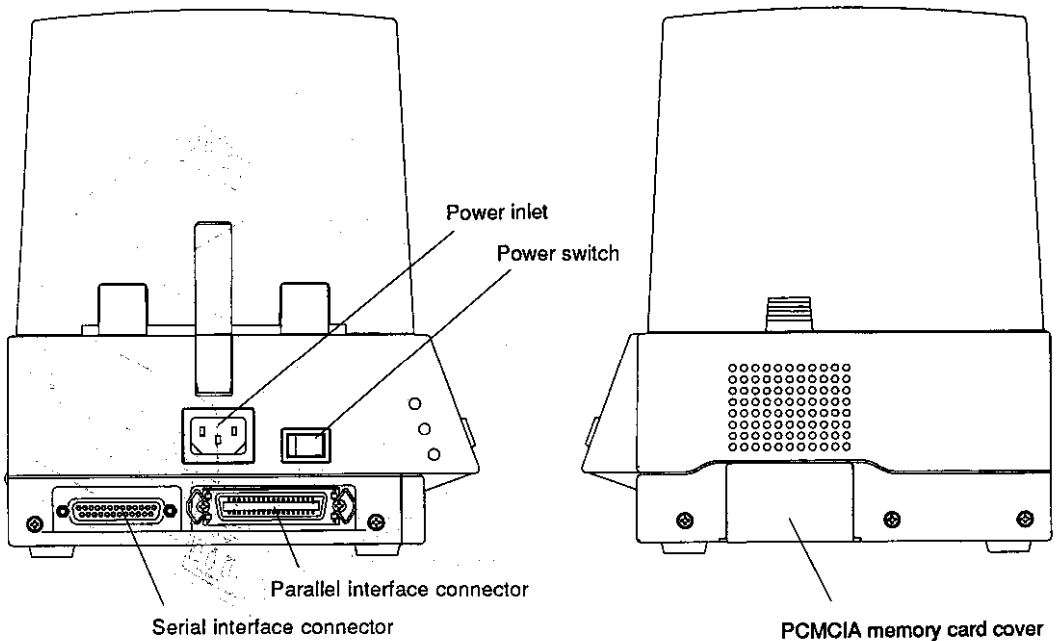

## 1.4 Connection to Power


waly sbi2



**CAUTION:** Use the three-pin (including grounding) outlet. Otherwise, you may get hurt by static electricity. Also, you may get an electric shock when the printer breaks down or short circuit occurs or a thunderbolt falls.

Connect to power as follows:

- 1) Check that the power switch on the printer is turned off.
- 2) Connect the connector of the power cord to the power inlet on the printer.
- 3) Insert the plug of the power cord in the outlet.

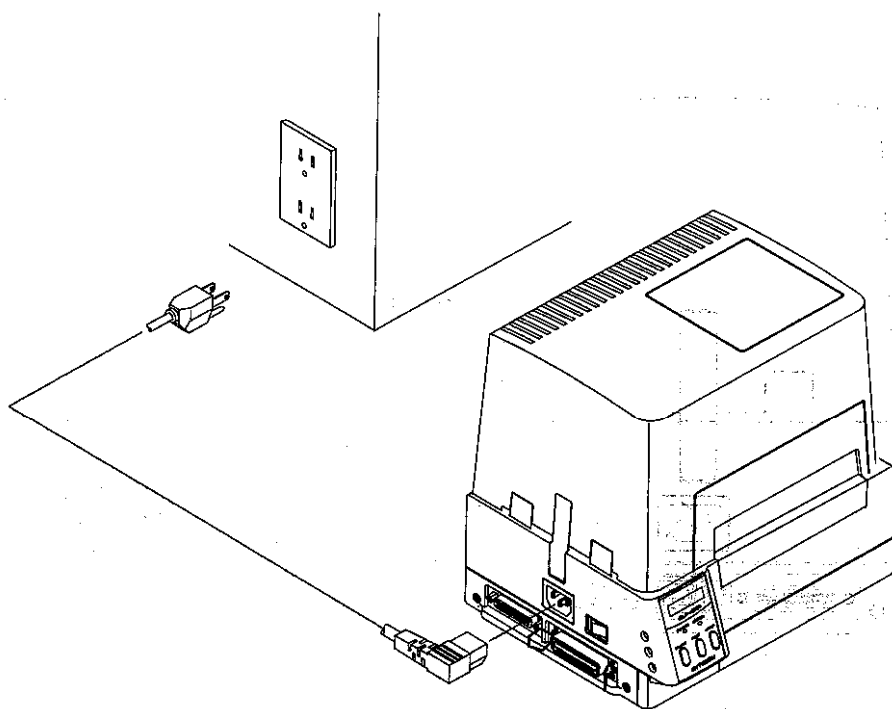


## 1.5 Connection to a Computer

An interface cable is necessary for connecting the printer to a computer.

Connect the printer to a computer as follows:

- 1) Check that both printer and computer power switches are turned off.
- 2) Insert the connector of the interface cable in the interface connector on the the printer and secure it with lock screws.
- 3) Insert the connector on the other side of the interface cable in the interface connector on the computer and secure it with lock screws.

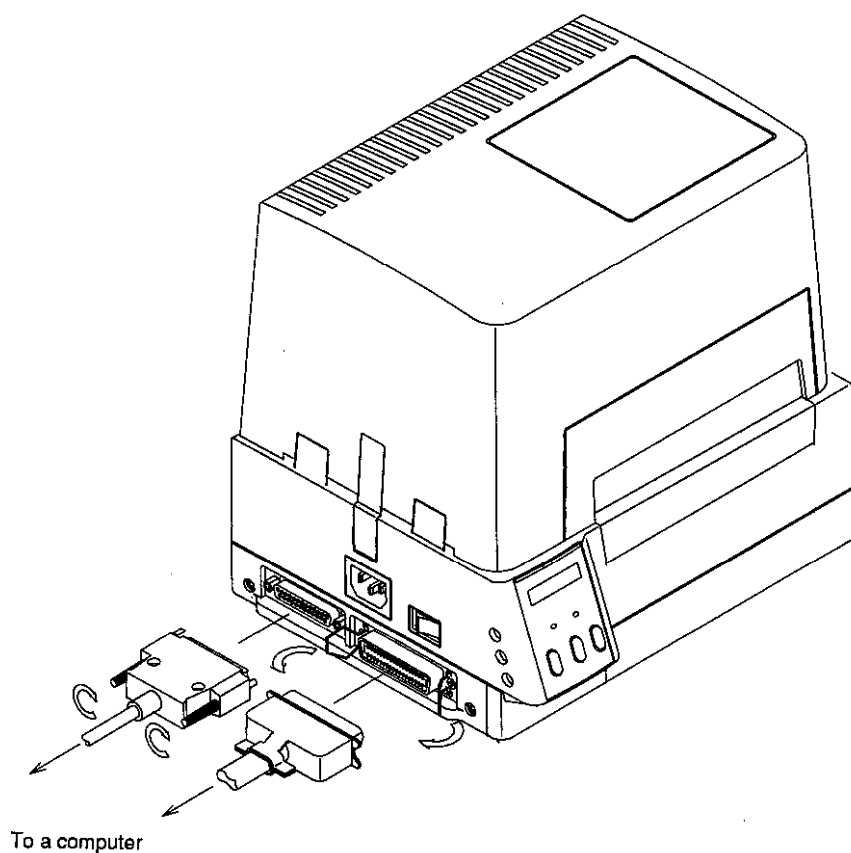



# **Chapter 2**


## **Control Panel**

- 2.1 Control Panel 2-2
- 2.2 LCD/LED Indications and Adjustment Controls 2-3
- 2.3 Normal Operating Mode 2-3
- 2.4 Printer Setup Mode 2-4
- 2.5 Self-Test Mode 2-4
- 2.6 System Maintenance Mode 2-5

# 2.1 Control Panel

The control panel consists of the three control keys (Pause, Feed and Stop), two LED indicator lights (Power and Error), a LCD message screen. On the left side of the control panel there are three adjustment controls (paper gap sensor, black line sensor and LCD contrast).

Exterior view

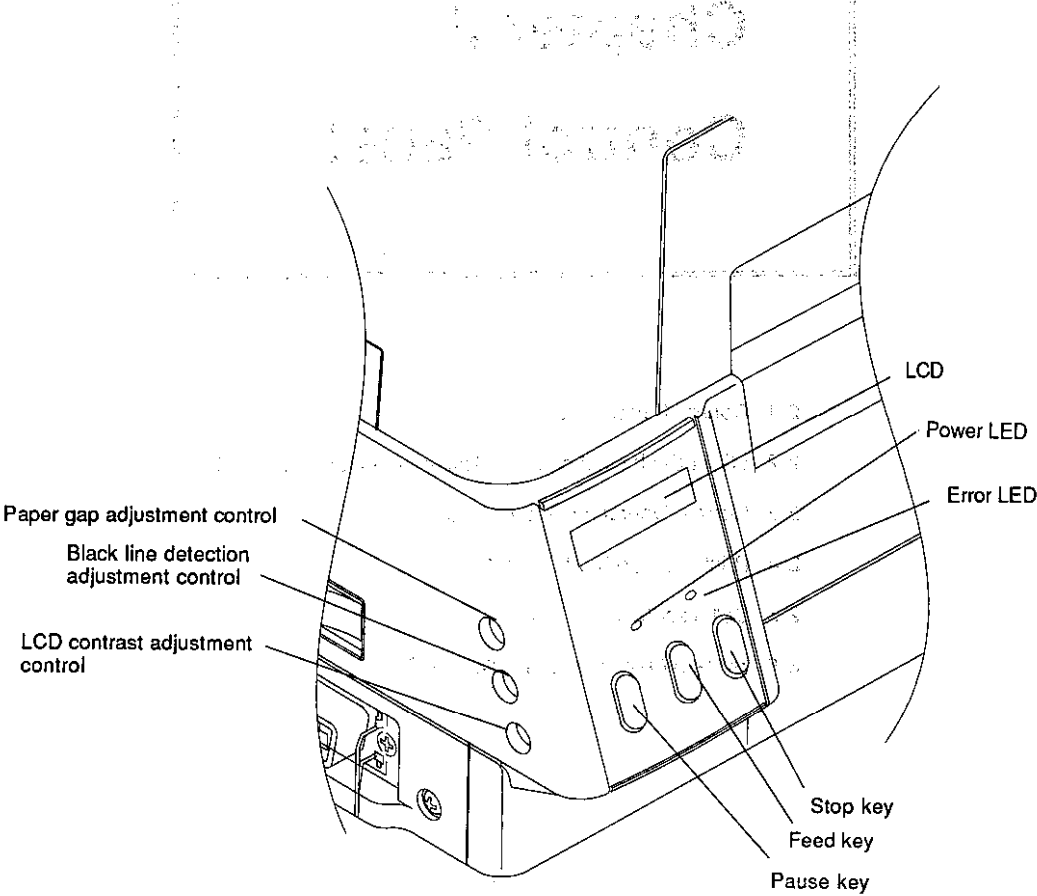



## 2.2 LCD/LED Indications and Adjustment Controls

### 1) LCD

The eight-character LCD screen displays the current printer status, configuration settings, or an error message.

### 2) LEDs

**Power:** Lights when the power is turned ON.

**Error:** Lights or blinks when an error occurs.

### 3) Adjustment controls

The three adjustment controls are used to adjust the paper gap (transparent type) sensor sensitivity, black line (reflective type) sensor sensitivity, and LCD contrast.

## 2.3 Normal Operating Mode

When the power is turned on, the printer enters the normal operating mode. The control keys function as follows:

#### ■ Pause key

Temporarily pauses printing. "Pause" is displayed on the LCD screen. If pressed during printing, printing will stop after the current label is printed. Press the Pause key again to resume printing.

#### ■ Feed key

Advance to the top of the next label. When using continuous paper, make sure the Sensor selection is set to ContinuP or a Paper error will result.

#### ■ Stop key

With this key, the operator can stop and cancel the current print job. Pressing the Stop key during printing stops the printing immediately. Pressing the Stop key again cancels the print job. If pressed when the Error LED is illuminated, the error will be cleared and the printer will pause. But if the error is not cleared, the Error LED will remain illuminated.

# 2.4 Printer Setup Mode


The printer enters the printer setup mode when both Stop and Feed keys are pressed simultaneously. The control key functions at this time are described below.

Settings of the printer setup mode are stored in nonvolatile memory, so once they are set, they are remained even when the power is turned off.

## [Functions]

Set the print mode selection, peeling sensor ON/OFF, auto-cutter ON/OFF etc.

- Pause key: Selects the mode.
- Feed key: Selects the mode item.
- Stop key: Saves settings and returns the printer to normal operating mode.

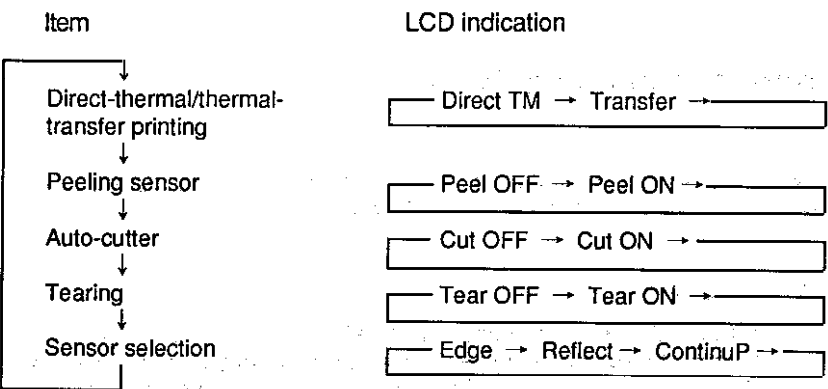

# 2.5 Self-Test Mode

The printer enters the self-test mode when the Feed key is pressed and held down while turning the printer on.

## [Functions]

The printer performs the test print and enters the data dump mode (prints communication data with ASCII codes). The printer returns to the normal operating mode when the power is turned off.

If the Feed key is pressed further for five seconds after the printer has entered the self-test mode, the test print will be performed in the continuous paper mode, regardless of sensor selection stored in backup memory.

## 2.6 System Maintenance Mode

The printer enters the system maintenance mode when the Pause, Feed and Stop keys are pressed and held down simultaneously while turning the printer on.


If those keys are pressed further for five seconds after the printer has entered the system maintenance mode, the system will be reset and the settings in the backup memory will be reset to the following default values:

- RS-232C communication setting
  - Baud rate: 9600 bps
  - Data length: 8 bits
- Print mode setting
  - Print mode: Thermal-transfer printing
- Optional function setting
  - Peeler: OFF
  - Cutter: OFF
  - Ejector: OFF
- Paper sensor setting
  - Sensor: Transparent type (paper gap detection)
- Compatible model setting
  - Native: ON

### [Functions]

Set the RS-232C communication parameter and enter the paper sensor sensitivity adjustment mode.

- Selects the mode when the Pause key is pressed.
- Selects the mode item when the Feed key is pressed.
- Stores the selected settings in the backup memory when the Stop key is pressed and the printer comes on-line.

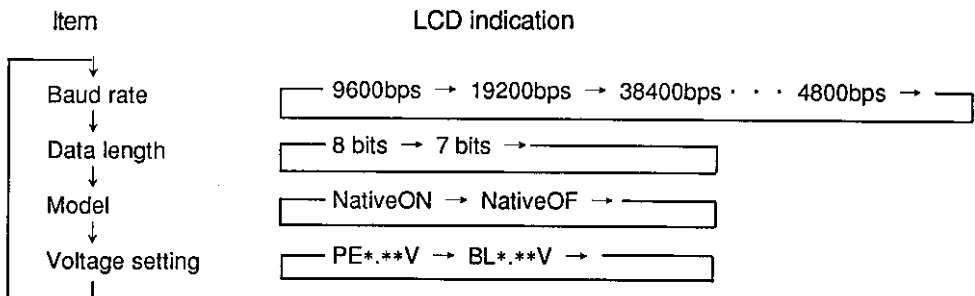

## ■ Voltage setting

In the voltage setting mode, operate the paper gap and black line adjustment controls in the following way:

For the standard paper gap voltage, both "PE" and "BL" displayed on the LCD screen are set to 3.0 V–3.3 V.

Setting procedure:

- 1) Sets only the base sheet peeled off the label. (For the black line paper, set it so that black lines are off the paper sensor.)
- 2) Sets the paper gap level to 3.0 V–3.3 V by operating the adjustment controls.

# **Chapter 3**

## **Paper and Ribbon**

- 3.1 Kinds of Paper 3-2
- 3.2 Label and Tag Specifications 3-2
- 3.3 Ribbon 3-6
- 3.4 Loading the Paper 3-7
- 3.5 Loading the Ribbon 3-9
- 3.6 Print Head Offset Adjustments 3-10
- 3.7 Ribbon Tension Adjustments 3-12

### 3.1 Kinds of Paper

1) Kinds of paper

A thermal-transfer or direct-thermal printing paper can be used.

The paper must be of high quality. Otherwise, the clear print quality and the longer life of the print head will not be guaranteed.

2) Type of paper

- Labels (continuous, die-cut, fanfold)
- Tags
- Tickets

Both in-wound and out-wound paper rolls may be used.

3) Size of paper

Width of paper: 25.4 mm–118 mm (1 in–4.65 in)

Thickness of paper: 0.063 mm–0.254 mm (0.0025 in–0.01 in)

Max. printing width: 104 mm (4.1 in)

Max. printing length: 406 mm (16 in)

Max. outer dimension of roll paper:

203 mm (8 in) when using optional roll paper holder

101.6 mm (4 in) when using standard paper holder

4) Inner diameter of paper core

Inner diameter of paper core for roll paper: 38 mm–102 mm (1.5 in–4 in)

Note: The paper core inner diameter for installing the standard paper holders is 38 mm (1.5 in)

### 3.2 Label and Tag Specifications

The position of the label or tag is detected by the printer's transparent and reflective type photosensors.

Transparent type photosensor: Detects paper gaps between labels or tag notches.

Reflective type photosensor: Detects black lines.

■ Paper specifications


For dimensions of the paper gaps between labels, tag (label) notches and black lines, see the table and figure.

		Minimum value mm (in)	Maximum value mm (in)
A	Width of label	25.40 (1.0)	118.00 (4.65)
B	Width of liner	25.40 (1.0)	118.00 (4.65)
C	Left edge of label	0	2.54 (0.10)
D	Length of paper gap between labels	2.54 (0.10)	2539.00 (99.96)
E	Length of label	12.70 (0.50)	2539.00 (99.96)
F	Pitch of label	12.70 (0.50)	2539.00 (99.96)
G	Thickness of liner	0.06 (0.0025)	0.125 (0.0049)
H	Overall thickness of paper	0.06 (0.0025)	0.25 (0.01)
I	Right end of notch	8.3 (0.32)	11 (0.43)
J	Left end of notch	0	4.7 (0.19)
K	Length of notch	2.54 (0.10)	17.80 (0.70)
L	Right end of black line	15.00 (0.59)	—
M	Left end of black line	0	1.5 (0.06)
N	Width of black line	3.18 (0.125)	17.80 (0.70)

Note: Use the paper gap sensor when the paper has paper gaps between labels and black lines.


Use the paper gap sensor for the fanfold.

# Size of paper

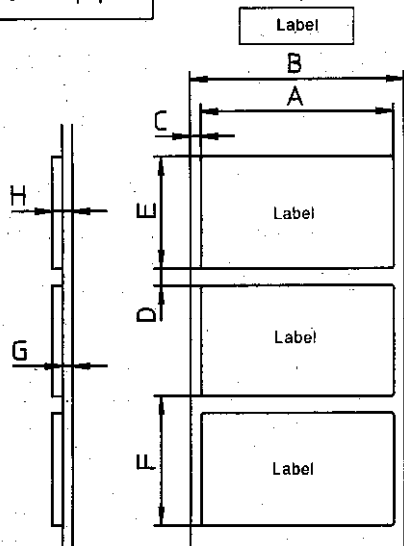

Use of paper-gap sensor

# Continuous paper

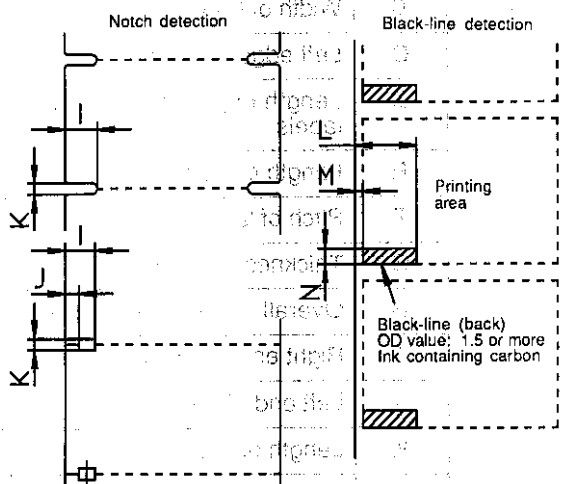


Use of paper-gap sensor

Use of black-line sensor



Direction of paper feed

# Printing area

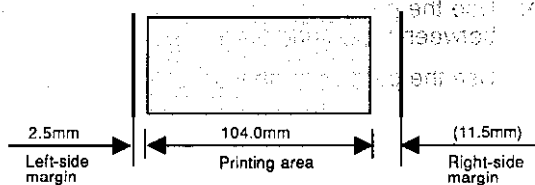



## Units for specifying position and length

The print position may be specified in either inch or metric system. Switching between the two systems is accomplished through software. The print position can be freely designated within the maximum label size, regardless of which system you wish to use.

### ■ Inch system

Basic unit (point): 0.01 in (0.254 mm)

The position of each row address (in direction of main scanning) and column address (in direction of subscanning) is designated in 0.01-inch units. In case of the 203 dpi head, if the print position changes by 1 point, it changes by 2 dots.

$$\begin{aligned} 1 \text{ point} &= 0.01 \text{ in} \quad \approx \quad 2 \text{ dots} \\ 100 \text{ point} &= 1.00 \text{ in} \quad \approx \quad \underline{203} \text{ dots} \end{aligned}$$

### ■ Metric system

Basic unit (point): 0.1 mm


The position of each row address and column address is designated in 0.1-mm units. Since a slight difference between the main and subscanning density and the point value exists, the nearest dot number to the designated address is selected in one dot (0.125 mm) units.

$$\begin{aligned} 1 \text{ point} &= 0.1 \text{ mm} \quad \approx \quad 1 \text{ dot} \\ 100 \text{ point} &= 10.0 \text{ mm} \quad \approx \quad \underline{80} \text{ dots} \end{aligned}$$

The basic unit is common to all label format and system level commands. The label format commands are used to specify the position, length, whole screen offset etc. And the system level commands are used to specify the maximum paper length, home position offset etc.

## Reference points

The reference points are described in the figure. The position of 2.5 mm from the left edge of the paper is the reference point. The left bottom is the reference point for the printed characters and bar codes. The concept of this reference point is common to such commands as ruled line and graphic.

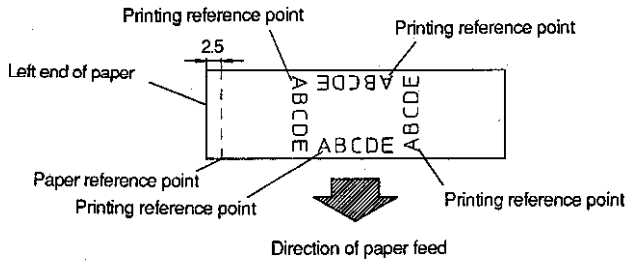

## 3.3 Ribbon

Size of ribbon:

Width of ribbon: 25.4–114.3 mm (1–4.5 in). The  $\pm 10\%$  of the width of the paper to be used is recommended for the width of the thermal-transfer ribbon.

Use the inner diameter of 25.4 mm (1 in) for the ribbon paper core.

The ribbon with inking surface rolled inward or outward can be used.

The maximum outer diameter of the ribbon roll is 74 mm (2.9 in).

A single roll of ribbon (360 m) can be used for printing on about two rolls with an outer diameter of 203 mm (8 in).

### 3.4 Loading the Paper







#### CAUTION

Be careful of the edges of the plates so injury or property damage is possible.

The printer is designed to easily load the paper and ribbon. After opening the cover, set the register paper as follows:

- 1) Push down the open lever (1) to have the head open (see the figure).
- 2) Push the lever (3) to have the guide rail upper (2) open.
- 3) Insert the roll holder (4) in the roll paper and roll guide (5) and set on the paper holder (6). Adjust the roll guide (5) to match the width of the paper. The roll paper must be positioned into the reference plane.
- 4) Slide the moving paper guide (7) to the right end to secure the paper insertion course.
- 5) Set the paper as shown in the figure.
- 6) Align the left edge of the paper with the stationary paper guide (8) and put the moving paper guide to the edge of the paper so that the paper does not shift sideways.
- 7) Push down the guide rail upper until the lever is hooked and lock it.
- 8) Align the paper with the peeling plate (9) positioning notch and push down the ribbon bearing flat (10) to close the print head. The open lever is hooked.
- 9) Close the cover.
- 10) Turn on the power to the printer. The LCD screen on the control panel will show the "On line." Press the Feed key. The paper will advance to the next label and stop there.

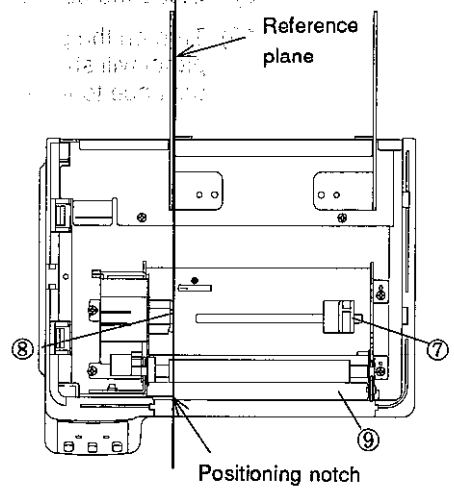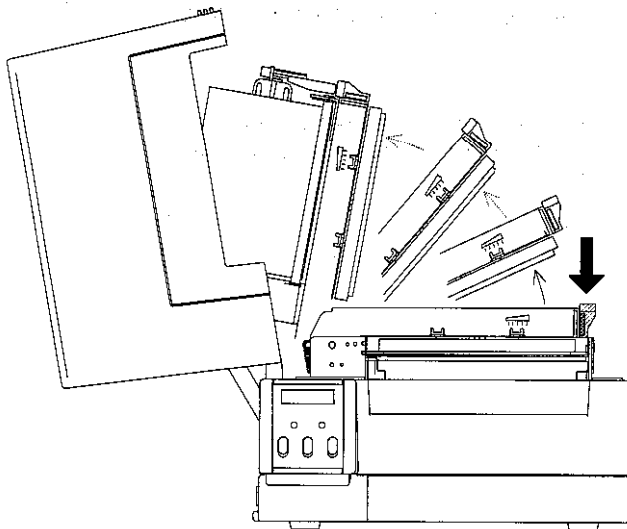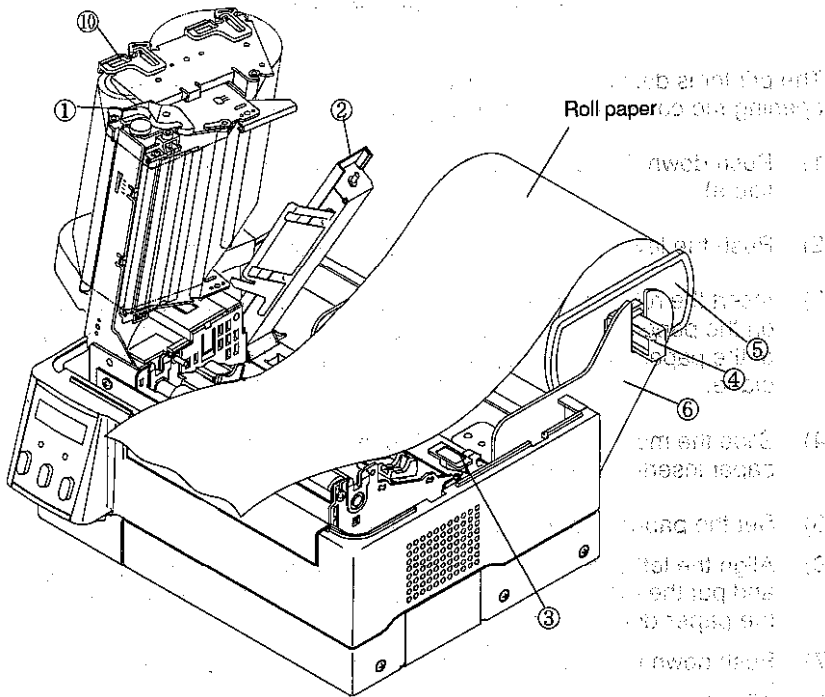

2. When the print density on the left and right sides is not equal (when the paper with a different width has been used):

The right head pressure viewed from the front of the panel can be adjusted with the head pressure adjust-screw. Turning the adjust-screw clockwise decreases the head pressure and turning the adjust-screw counterclockwise increases the head pressure. And the condition of the right side of the print head can be checked through the upper frame window which is located at the front of the printer mechanism unit.



#### ■ Adjustments

Normally, the left and right head pressure has already been factory-set to same loads. The check marks of the upper frame window are located at the right side of the printer viewed from the front of the printer.

Adjustments are needed in the following cases:

- 1) When the print on the left side is too light, turn the head pressure adjust-screw clockwise.
- 2) When the print on the right side is too light, turn the head pressure adjust-screw counterclockwise.
- 3) When the paper with a different small width is used, the contact between the print head and the platen becomes large, so the stepping motor will take a heavy load or the print head may scrape the platen. To avoid this, turn the head pressure adjust-screw clockwise to decrease the right head pressure.

In addition, adjustments will be useful for preventing the ribbon wrinkling or the paper skew. For more information, contact our service personnel.

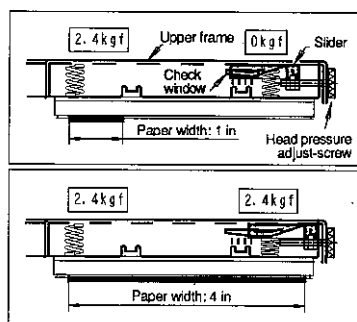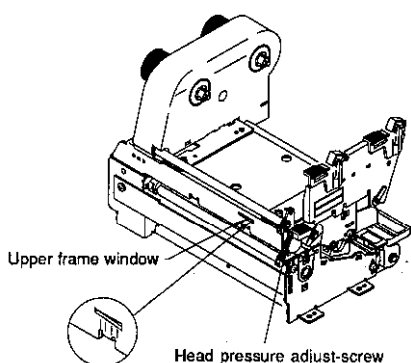

Check window	Paper width	Right head pressure
	1 inch	0 kgf
	2 inches	0.5 kgf
	3 inches	1 kgf
	4 inches	2.4 kgf
	Used for adjustment when ribbon wrinkles or skews in paper width of 4 inches	
	Factory setting	

Note: These values are just for criteria.

### 3.7 Ribbon Tension Adjustments

Three kinds of ribbon tension (Strong, Medium and Mild) are available on each ribbon feed and winding section. Changing the ribbon tension is accomplished with the variable knobs. Numbers 1, 2 and 3 (Strong, Medium and Mild) are indicated on each variable knob.

#### ■ Adjustments


When the width of the ribbon is 4 in, set it to Strong.

When the width of the ribbon is 3 in, set it to Medium.

When the width of the ribbon is 2 in, set it to Mild.

The above is just for reference. The ribbon tension should be adjusted if the following problems occur:

- a) When the ribbon wrinkles, increase the tension.
- b) When the ribbon slips, decrease the tension.

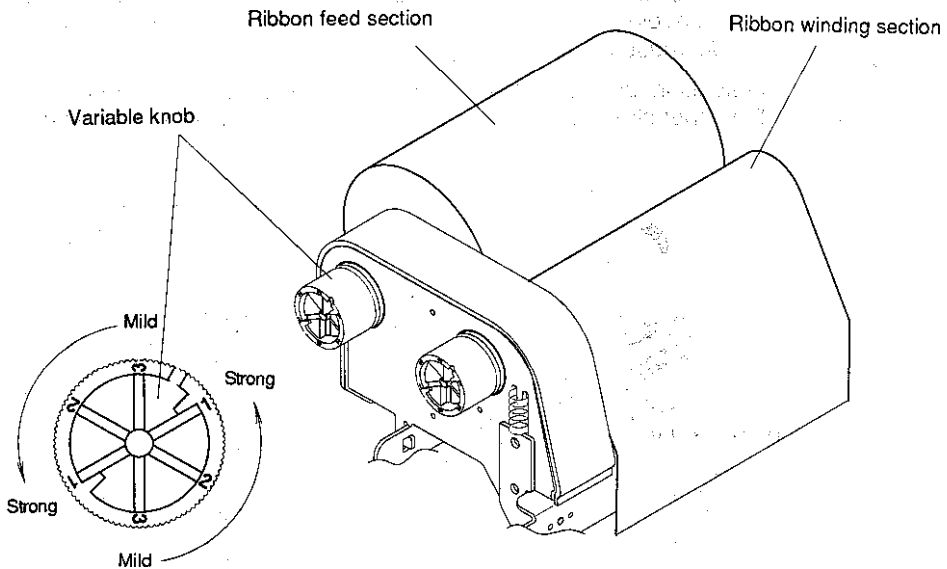

# **Chapter 4**

## **Troubleshooting**

- 4.1 Error Messages 4-2
  - 4.1.1 Error descriptions and indications 4-2
  - 4.1.2 Error indications and corrective actions 4-4
- 4.2 Power Troubleshooting 4-7
- 4.3 Paper Feed Troubleshooting 4-8
- 4.4 Ribbon Feed Troubleshooting 4-9
- 4.5 Print Troubleshooting 4-10
- 4.6 Interface Troubleshooting 4-11

## 4.1 Error Messages

When there is a problem with the printer, a buzzer sounds, and the LED error indicator on the control panel lights. An error message is displayed on the LCD screen. Error descriptions and corrective actions are shown below.

### 4.1.1 Error descriptions and indications

Description	LCD indication	LED	Buzzer
Battery dead (for clock and backup RAM)	Battery	Lights	Sounds long
Low head temperature	ColdHead	Lights	Sounds long
Low PCB temperature	Cold PCB	Lights	Sounds long
Abnormal head resistance value Error contents and head information repeatedly displayed Rank: Rank of head resistance value Average: Average of resistance values (A/D reading value decimal system) Maximum: Max. value of resistance Minimum: Min. value of resistance	Head Err  Rank ***  Ave.***  Max.*** Min.***	Lights	Sounds long
Communication error (receive buffer overrun)	OverFlow	Lights	Sounds long
Communication error (parity, framing)	S/I Err	Lights	Sounds long
Communication error (transmit buffer overflow)	HostBusy T.D.Full	Blinks	Sounds short 3 times
Pause key pressed	Pause	--	--
Pause command reception (remote control)	Pause	--	--
Head overheat	OverHeat Cooling	Blinks	Sounds short 3 times
Stop key pressed	Stop	--	Sounds short 3 times
Stop command reception (remote control)	Cancel	--	--
Mechanism head open	HeadOpen	Lights	Sounds short 3 times
Paper end (no paper left)	PaperEnd	Lights	Sounds short 3 times

(continued)



Description	LCD indication	LED	Buzzer
Paper out (paper position can't be detected) Error contents and sensor information repeatedly displayed. M command: Sets length for detection miss checking with system command M Maximum: Max. value of sensor reading voltage Minimum: Min. value of sensor reading voltage	PaperErr  M CMND  Max*.**V  Min*.**V	Lights	Sounds short 3 times
Ribbon end	RibbonOut	Lights	Sounds short 3 times
PCB overheat (PCB or sensor abnormality)	OverHeat	Lights	Sounds short 3 times
Motor overheat	MotorHot Cooling	Blinks	Sounds short 3 times
Option board abnormality	OP Err	Lights	Sounds short 3 times
Auto-cutter abnormality (such as poor engagement)	Cut Err	Lights	Sounds short 3 times
ROM checksum error	ROM Err	Lights	Sounds long
RAM checksum error	RAM Err	Lights	Sounds long
System error (such as timer or CPU running out of control) System is protected and all printer functions are stopped.	--	--	--

#### 4.1.2 Error indications and corrective actions

LCD Indication	Description	Corrective actions
Battery	Battery dead	<p>Automatically returned after displaying the error for a certain time.</p> <p>Change the lithium battery (CR2032).</p> <p><b>Note:</b> Contact our service personnel for replacing the battery</p> <p>If the battery runs down, the real-time clock will stop and the contents of the memory switch will be lost.</p>
ColdHead	Low head temperature	<p>Automatically returned after displaying the error for a certain time.</p> <p>Raise the temperature around the printer.</p> <p>Print density becomes low and print quality becomes inferior when the head temperature is low.</p>
Cold PCB	Low PCB temperature	<p>Automatically returned after displaying the error for a certain time.</p> <p>Raise the temperature around the printer.</p> <p>Print density becomes low and print quality becomes inferior when the head temperature is low.</p>
Head Err	Abnormal head resistance value	<p>Check the contents and clear with the Stop key.</p> <p>Replace the print head.</p> <p>Print quality is affected in the section with abnormal head resistance value.</p>
OverFlow	Communication error (receive buffer overrun)	<p>Check the contents and clear with the Stop key.</p> <p>Correct the communication control system or faulty communication cable.</p>
S/I Err	Communication error (parity, framing)	<p>Check the contents and clear with the Stop key.</p> <p>Correct the communication parameter or faulty communication cable.</p>
HostBusy T.D.Full	Communication error (transmit buffer overflow)	<p>Automatically returned if the computer receives data and the buffer becomes empty.</p>
Stop	Stop key pressed	<p>Enters the pause after displaying the stop by the Stop key.</p> <p>If the Pause key is pressed, the printing will resume.</p> <p>If the Stop key is pressed again, the stored printing contents will be lost and the printer will be "on line."</p>

(continued)

LCD indication	Description	Corrective actions
Pause	Pause key pressed	Press the Pause key once again to resume printing.  If the Stop key is pressed, the stored printing contents will be lost and "on line" will turn on.
Pause	Pause command reception (communication control)	Same as above.
OverHeat Cooling	Head overheat	Wait until the head temperature goes down. When the temperature becomes low, the remaining printing resumes.
MotorHot Cooling	Motor overheat	Wait until the motor temperature goes down. When the temperature becomes low, the remaining printing resumes.
Cancel	Stop command reception	Displays the stop by the stop command, discards the remaining printing contents, and enters the pause.  If the Pause key is pressed, the printer will be "on line."
HeadOpen	Mechanism head open	Close the mechanism head.

(continued)

LCD indication	Description	Corrective actions
PaperEnd	Paper end (no paper left)	Install the paper.
PaperErr	Paper out (paper position can't be detected)	<p>Check the contents and clear with the Stop key.</p> <p>Correct the faulty setting of the paper detection (paper gap, black line, continuous paper).</p> <p>Correct the faulty parameter for paper (max. length, continuous paper).</p> <p>Adjust the sensor or change for the paper that can accept the paper position detection.</p> <p>Specify the length of the detection miss checking with the M command.</p> <p>When the paper position can't be detected during paper feeding by the specified length, it is judged error. Generally specify the length about three times the label length.</p> <p>In case of the continuous paper, specify the label length with the C command.</p> <p>Difference between the maximum and minimum values of the sensor reading voltage is 0.8 V or more.</p> <p>Sensor can be adjusted and paper characteristic (voltage verification) can be verified with the Maintenance mode.</p>
RibbonOut	Ribbon end	<p>Check the contents and clear with the Stop key.</p> <p>Install the ribbon.</p> <p>Check that the ribbon is wound properly.</p> <p>Correct the print mode (direct-thermal or thermal-transfer) setting failure.</p>
OverHeat	PCB overheat	Turn off the power and reset the printer. If this recurs, contact our service personnel.
OP Err	Option board abnormality	Turn off the power and reset the printer. If this recurs, contact our service personnel.
Cut Err	Auto-cutter abnormality (such as poor engagement)	<p>Check the contents and clear with the Stop key.</p> <p>If this can't be cleared, turn off the power and remove foreign matter from the auto-cutter.</p> <p>If this recurs, contact our service personnel.</p>

(continued)

LCD indication	Description	Corrective actions
ROM Err	ROM checksum error	Turn off the power and reset the printer. If this recurs, contact our service personnel.
RAM Err	RAM checksum error	Turn off the power and reset the printer. If this recurs, contact our service personnel.
--	System error (such as timer or CPU running out of control) System is protected and the printer is reset	First protect the system, then reset the printer.

## 4.2 Power Troubleshooting

Problem	Cause and remedy
No power even with power switch turned ON.	<ul style="list-style-type: none"> <li>• Power cord is not properly connected to the outlet. → Turn off the power switch and properly reconnect the power cord to the outlet.</li> <li>• Power cord is not properly connected to the power inlet. → Turn off the power switch and properly reconnect the power cord to the power inlet.</li> <li>• Input voltage is not correct; input voltage is greater or less than the rated voltage. → Set input voltage within the rated voltage (puncture voltage may occur. Contact our service personnel).</li> <li>• Proper RS-232C cable is not used. → Turn off the power switch and unplug the interface cable. Check that power is delivered by turning on the power switch and use the proper RS-232C cable.</li> </ul>

## 4.3 Paper Feed Troubleshooting

Problem	Cause and remedy
Paper doesn't feed.	<ul style="list-style-type: none"> <li>Paper path is wrong. → Use the proper path.</li> <li>Mechanism head is open. → Close the mechanism head.</li> </ul>
Paper skew.	<ul style="list-style-type: none"> <li>Paper end is not in contact with the paper guide. → Slightly push the paper guide against the paper end.</li> <li>Roll guide is not in contact with the roll paper. → Slightly push the roll guide against the roll paper.</li> <li>Head pressure is not proper. → Adjust it with the offset adjust-screw according to the width of the paper.</li> </ul>
Paper doesn't align with the print position.	<ul style="list-style-type: none"> <li>Setting mode is not proper. → Check whether the setting mode is the paper gap or black line detection and if it is not proper, change it.</li> <li>Paper gap (black line) sensor adjustment failure. → Adjust the voltage of the paper gap and black line sensor in the system maintenance mode.</li> <li>Transfer data is abnormal. → If the contents of the transfer data are not set properly, set them again.</li> </ul>

## 4.4 Ribbon Feed Troubleshooting

Problem	Cause and remedy
Ribbon is not wound.	<ul style="list-style-type: none"> <li>• Ribbon path is wrong. → Use the proper path.</li> <li>• Direction of ribbon winding is reverse. → Set it to the right winding direction.</li> <li>• Tension of ribbon winding is not proper. → Set it properly.</li> </ul>
Printing continues even if ribbon is out.	<ul style="list-style-type: none"> <li>• Print mode is the direct-thermal. → Set it to the thermal-transfer if necessary.</li> </ul>
Ribbon wrinkles.	<ul style="list-style-type: none"> <li>• Tension of the ribbon holder and winder is not proper. → Set it properly.</li> <li>• Print density (heating factor) is not proper. → Correct the parameter of the Hnn command in the printing contents definition mode.</li> <li>• Angle of ribbon guide bar is not correct. → Adjust the ribbon guide bar. Contact our service personnel. <b>Note:</b> If a narrow paper is used, the ribbon may wrinkle. To avoid this, decrease the right head pressure with the head pressure adjust-screw.</li> </ul>

## 4.5 Print Troubleshooting

Problem	Cause and remedy
Printing doesn't start.	<ul style="list-style-type: none"> <li>• Power to the printer is off. → Turn on the power switch. If power is not still turned on, follow the steps in the Power Troubleshooting.</li> <li>• Printer is not properly connected to a computer. → Turn off the power switch and connect it properly.</li> <li>• Printer setting is not proper. → Correct the printer setting.</li> </ul>
Missing all lines.	<ul style="list-style-type: none"> <li>• Print head connector connection failure. → If the print head connector is not properly connected, insert it correctly.</li> <li>• Paper and ribbon are not set properly. → Set them properly.</li> </ul>
Partially dropouts.	<ul style="list-style-type: none"> <li>• Print head is dirty. → Check the print head heating element for dirt. If it's dirty, wipe the surface of the print head heating element with a soft clean cloth soaked in ethylalcohol etc.</li> <li>• Platen roller is dirty. → Remove any dirt or label or tape on the platen.</li> </ul> <p><b>Note:</b> If it can't be removed, contact our service personnel for general maintenance.</p>

(continued)



# **Chapter 5**

## **Options**

Factory or reseller (dealer) options:

5.1 Auto-Cutter Unit 5-2

5.2 Peeler Unit 5-2

5.3 Adjustable Sensor 5-2

User options:

5.4 PCMCIA Memory Card 5-3

5.5 8-In Size Roll Paper Holder 5-4

## 5.1 Auto-Cutter Unit

The auto-cutter unit that has been installed on the printer will be available. See the operation manual of the auto-cutter for details.

### ■ Specifications

- Cutting method: Circle cutter
- Max. thickness of cut paper: 0.01 in (0.25 mm)
- Min. length of cut paper: 1.0 in (25.4 mm)

## 5.2 Peeler Unit

The peeler unit that has been installed on the printer will be available. See the operation manual of the peeler unit for details.

### ■ Specifications

- Width of paper: 1–4.65 in (25.4–118 mm)
- Max. diameter for roll paper: 8 in (203 mm)
- Inner diameter for roll paper: 4 in (102 mm), min.
- Min. length of label: 1 in (25.4 mm)
- Thickness of paper: 0.0067 in (0.17 mm), max.
- Thickness of liner of label: 0.0027 in (0.07 mm), max.
- Unusable paper: Special paper (Whitepet etc.) or too flexible and easy-to-jam paper

## 5.3 Adjustable Sensor

The adjustable sensor that has been installed on the printer will be available. See the operation manual of the adjustable sensor for details.

### ■ Specifications

- Adjustable sensor travel: 59 mm (2.3 in) from the left edge of the paper (reference position of setting paper).

## 5.4 PCMCIA Memory Card

The PCMCIA memory card is used to:


- 1) Store the print format files. Data in the field register area can be stored and loaded.
- 2) Store graphic data. For example, graphic data such as a corporate logo can be stored and recalled from the PCMCIA memory card and printed.

**Note:** The maximum size of storing graphic data is 256K bytes.

- 3) Store downloaded HP Soft fonts.

### ■ Installation

- 1) Turn off the power to the printer.
- 2) Remove the PCMCIA memory card cover at the bottom of the printer (see figure).
- 3) Insert the memory card (make sure the card is not inverted).
- 4) Replace the PCMCIA memory card cover.

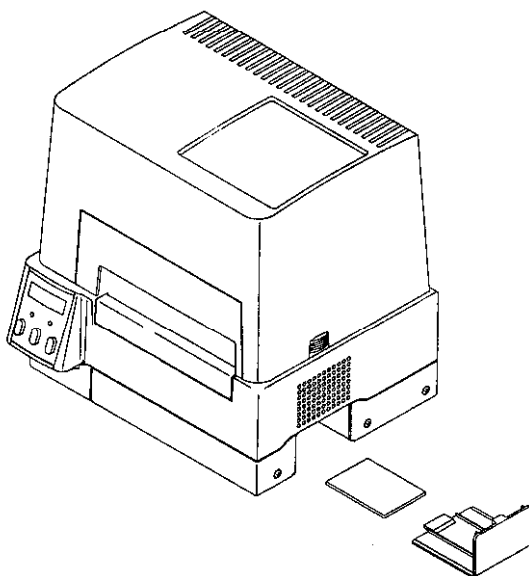

- Notes:**
- Before use, carefully read and understand the instructions regarding the PCMCIA memory card.
  - Never try to insert or remove the PCMCIA memory card before the power to the printer is turned off.
  - Always close the PCMCIA memory card cover to keep out dirt.
  - If the PCMCIA memory card write failure occurs, check it with the test command (STX.w). (Also, check the write protection switch of the PCMCIA memory card.)

## 5.5 8-in Size Roll Paper Holder

### 8-in size roll paper holder

- Max. outer diameter: 8 in (203 mm)
- Paper core inner diameter: 1.5 in–3 in (38 mm–76 mm)

# **Chapter 6**

## **Specifications**

- 6.1 Basic Specifications 6-2
- 6.2 Interface 6-5
  - 6.2.1 Serial interface system configuration 6-5
  - 6.2.2 Parallel interface system configuration 6-6
  - 6.2.3 RS-232C loopback test 6-7
  - 6.2.4 RS-232C protocol 6-7
  - 6.2.5 Interface pin assignment 6-9
- 6.3 Outline of Command System 6-11
- 6.4 Example of Connection to a Computer 6-12
- 6.5 Tear-Off Function 6-13
  - 6.5.1 Turning Tear ON/OFF 6-13
  - 6.5.2 Tear-off when printing 6-13
  - 6.5.3 Tear-off when feeding 6-14
  - 6.5.4 Tear-off and type of data 6-15
  - 6.5.5 Cut position adjustments 6-15
  - 6.5.6 When "fnnn" command is executed while tear-off function is OFF 6-16
  - 6.5.7 Priority order 6-16

## 6.1 Basic Specifications

Item	Description
Printing	<ul style="list-style-type: none"> <li>• Direct-thermal or thermal-transfer</li> <li>• 203 dpi (8 dots/mm) print head (Main scanning line density: 8 dots/mm) (Subscanning line density: 8 lines/mm)</li> <li>• Max. printing width: 4.1 in (104 mm)</li> <li>• Max. paper width: 4.65 in (118 mm)</li> <li>• Max. printing length: 32 in (812 mm)</li> </ul>
Printing speed	<ul style="list-style-type: none"> <li>• 2–4 inches/second in one-inch units</li> </ul>
Print mode	<ul style="list-style-type: none"> <li>• Batch mode: Normal printing (single or multi sheets)</li> <li>• Peeling mode: Label peeling off the base sheet after printing</li> <li>• Cut mode: Cutting and printing by the specified number of sheets (label feeding back enabled)</li> <li>• Tear-off mode: Paper feeding back to the printing start position after cutting</li> </ul>
Bar code generator	<p>One-dimensional bar code:</p> <ul style="list-style-type: none"> <li>• Code 3 of 9</li> <li>• UPC-A</li> <li>• UPC-E</li> <li>• Interleaved 2 of 5</li> <li>• ITF14</li> <li>• ITF16</li> <li>• Telepen</li> <li>• Code 128</li> <li>• EAN-13 (JAN-13)</li> <li>• Codabar (NW-7)</li> <li>• HIBC (Modulus 43-used code 3 of 5)</li> <li>• EAN-8 (JAN-8)</li> <li>• Int 2 of 5 (Modulus 10-used Interleaved 2 of 5)</li> <li>• Plessey</li> <li>• CASE CODE</li> <li>• Code 93</li> <li>• UPC2DIG ADD</li> <li>• UPC5DIG ADD</li> </ul> <p>Two-dimensional bar code:</p> <ul style="list-style-type: none"> <li>• UPS Maxi Code</li> <li>• PDF-417</li> <li>• QR Code</li> </ul>

Item	Description
Standard fonts	<ul style="list-style-type: none"> <li>Font No. 0–6 system font (alphanumeric and European font)</li> <li>Font No. 7–8: OCR-A OCR-B</li> <li>Font No. 9: CG Triumvirate smooth font; 6 pt, 8 pt, 10 pt, 12 pt, 14 pt, 18 pt, 24 pt, 30 pt, 36 pt, and 48 pt.</li> </ul> <p>Character set in accordance with code page 850</p>
Media sensors	<ul style="list-style-type: none"> <li>Transparent type sensor: Detects paper gap between labels, tag notch and paper out</li> <li>Reflective type sensor: Detects black line on back of paper and paper out</li> <li>Paper top end position (home position) adjustable with software</li> <li>Label peeling sensor (optional)</li> </ul>
Paper	<ul style="list-style-type: none"> <li>Type of paper: Roll or fanfold type (continuous label paper, die-cut label paper, tag paper and continuous ticket paper)</li> <li>Kinds of paper: Direct-thermal or thermal-transfer paper</li> <li>Max. paper width: 4.65 in (118 mm)</li> <li>Min. paper width: 1 in (25.4 mm)</li> <li>Max. printing length: 32 in (812 mm)</li> <li>Min. printing length: 0.500 in (12.7 mm)</li> <li>Max. paper thickness: 0.01 in (0.254 mm)</li> <li>Min. paper thickness: 0.0025 in (0.063 mm)</li> <li>Roll paper diam.: max. outer diam.: 4 in (102 mm): Standard 8 in (203 mm): Optional paper core: 1.5–4 in (38–102 mm)</li> <li>Print density: Adjustable with software</li> </ul>
Ribbon	<ul style="list-style-type: none"> <li>Width: Freely set between 1.0–4.5 in (25.4–114 mm)</li> <li>Length: 1180 ft (360 m), max.</li> <li>Max. outer diam.: 2.9 in (74 mm)</li> <li>Paper core inner diam.: 1 in (25.4 mm) <math>\pm</math>0.01 in (0.254 mm)</li> </ul>

Item	Description
Communication interface	<ul style="list-style-type: none"> <li>Serial: RS-232C</li> <li>Parallel: Centronics</li> </ul>
Indications, keys and switches	<ul style="list-style-type: none"> <li>LEDs: Power and Error</li> <li>LCD: Displays printer status, error contents, mode switch contents, etc</li> <li>Control panel keys: Pause, Feed and Stop</li> <li>Mode switch: Parameter setting for switching between direct-thermal and thermal-transfer, communication etc.</li> <li>Head up detection switch</li> <li>Power switch</li> </ul>
Options	<p>By factory or reseller (dealer):</p> <ul style="list-style-type: none"> <li>Auto-cutter unit</li> <li>Peeler unit</li> <li>Adjustable sensor unit</li> </ul> <p>By user:</p> <ul style="list-style-type: none"> <li>8-in size roll paper holder</li> <li>PCMCIA memory card</li> </ul>
Appearance and weight	<ul style="list-style-type: none"> <li>Height: 9.3 in (235.1 mm)</li> <li>Width: 9.6 in (245 mm)</li> <li>Depth: 11.4 in (289.8 mm)</li> <li>Weight: 11.2 lbs (5.1 kg)</li> </ul>
Power	<ul style="list-style-type: none"> <li>Input voltage 120V: -10%+6%, 2.5A, 60Hz (U.S.A., Canada)</li> <li>Input voltage 220V-240V: -10%+6%, 1.2A, 50/60Hz (Europe)</li> </ul>
Environment	<ul style="list-style-type: none"> <li>Operating conditions: Temperature: 5-35°C (41-95°F) Humidity: 30-80% (noncondensing)</li> <li>Storage: Temperature: -20-60°C (-4-140°F) Humidity: 5-85%</li> <li>Ventilation: Convective circulation. Air vent be away from wall etc (to prevent fire)</li> <li>Dust: Free from conductive or corrosive matter</li> </ul>




## 6.2 Interface

The printer is connected to a computer and prints labels according to the commands from the computer.

Two methods of interface with a computer are as follows:

### 6.2.1 Serial interface system configuration

Serial interface: RS-232C (standard)

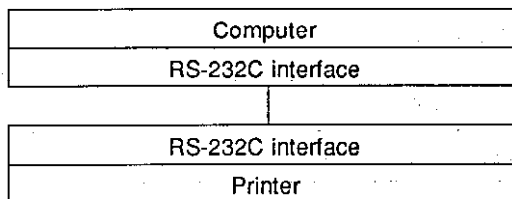


Serial interface specifications

Method	Asynchronous serial interface RS-232C
Connector	DSUB 25-pin
Protocol control	XON/XOFF and CTS/DTR
Receive buffer size	12K bytes Receiving data stops when the remaining buffer reaches 2K bytes and resumes when the remaining buffer reaches 4K bytes
Baud rate	300, 600, 1200, 2400, 4800, 9600, 19200, 38400 bps
Bit length	7- or 8-bit (Select 8-bit length when using Kana or Kanji)
Stop bit	Fixed  When printer receives data, stop bit is fixed at 1, and when printer transmits data, stop bit is fixed at 2. But computer can transmit and receive data, regardless of stop bit at 1 or 2
Parity	Non

### 6.2.2 Parallel interface system configuration

Parallel interface: Centronics (standard)

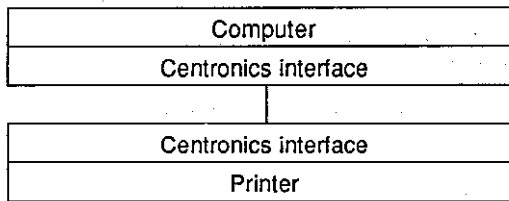


Parallel interface specifications

Method	8-bit parallel
Connector	36-pin unphenol type
Synchronous system	Strobe pulse
Handshaking	ACKNLG and BUSY signals
Signal level	TTL

### 6.2.3 RS-232C loopback test

After connector wiring as shown in the figure, turn on the test mode. The printer will receive data that has been transmitted by printer itself and the test of receiving and transmitting data will be performed.

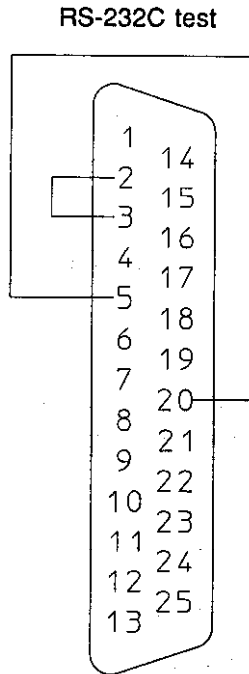

**Fig. Loopback test**

#### 6.2.4 RS-232C protocol

(1) X-ON/X-OFF system (see figure)


This is a control system in which the data transmission request signal (X-ON (11H) code) and the data transmission stop request signal (X-OFF (13H) code) are output.

**Requirements of output of X-ON code:**

- When the power is switched to ON
- When the remaining buffer is less than 2K bytes, and after outputting the X-OFF, the remaining buffer is more than 4K bytes

Requirements of output of X-OFF code:

- When a printer error occurs
- When the remaining buffer is less than 2K bytes

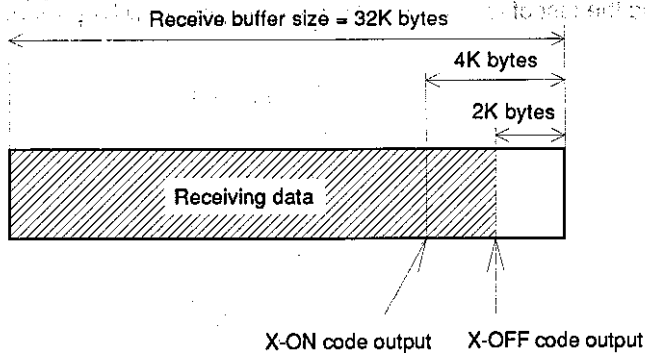

**Note:** Even if each code is ready for output, the same code cannot be transmitted twice successively (except when the power is turned on or the printer is reset from the control panel).

Fig. Buffer in use

## (2) Ready/Busy system (see figure)

Requirements of DTR "Ready (High)":

- When the printer is "on line."
- When the receive buffer is more than 2K bytes.

However, when the remaining buffer is more than 2K bytes and the DTR signal is Busy (Low), the printer keeps a "Busy (Low)" level until the remaining buffer is 4K bytes.

Requirements of DTR "Busy (Low)":

- When a printer error occurs
- When the printer enters the pause
- When the remaining buffer is less than 2K bytes.

## 6.2.5 Interface pin assignment

Serial and parallel interface pin assignment tables are shown below.

### ■ Serial interface pin assignment table

Pin No.	Signal	Input/Output	Description
1	F.GND	–	Frame ground
2	TXD	Output	RS-232C output data
3	RXD	Input	RS-232C input data
4	RTS	–	RS-232C (pull up to +5V with 2 K $\Omega$ )
5	CTS	Input	RS-232C data transmission on computer enabled
6	NC	–	Not connected
7	S.GND	–	Signal ground
8	NC	–	Not connected
9	NC	–	Not connected
10	NC	–	Not connected
11	NC	–	Not connected
12	NC	–	Not connected
13	S.GND	–	Signal ground
14	+5VDC	–	+5 V (max. load 100 mA)
15	NC	–	Not connected
16	NC	–	Not connected
17	NC	–	Not connected
18	NC	–	Not connected
19	NC	–	Not connected
20	DTR	Output	RS-232C data transmission on printer enabled (Busy)
21	NC	–	Not connected
22	NC	–	Not connected
23	NC	–	Not connected
24	NC	–	Not connected
25	NC	–	Not connected

■ Parallel interface pin assignment table

Pin No.	Signal	Input/output	Description
1	$\overline{\text{STROBE}}$	Input	Strobe signal for reading 8-bit data
2 – 9	DATA1-8	Input	8-bit parallel signal
10	$\overline{\text{ACKNLG}}$	Output	8-bit data request signal
11	BUSY	Output	Signal showing printer busy
12	PERROR	Output	Signal showing paper out
13	SELECT	Output	Signal showing printer "on line" (printing) or "off line" (pause)
14	$\overline{\text{AUTOFD}}$	Input	Invalidness (ignorance)
15	NC	–	Not used
16	S.GND	–	Signal ground
17	FGND	–	Frame ground
18	P.L.H	Output	Signal showing peripheral logic high (pull up to +5V with 1.2 K $\Omega$ )
19–30	GND	–	Ground for twisted pair return
31	$\overline{\text{INIT}}$	Input	Printer reset
32	$\overline{\text{FAULT}}$	Output	Signal showing printer error
33–35	NC	–	Not used
36	$\overline{\text{SELECTIN}}$	Input	Invalidness (ignorance)

## 6.3 Outline of Command System

For details about command system, see the Command Reference separately available.

Commands for this printer consist of a string of ASCII codes and end with "CR" (decimal: 13, hex: 0D). Commands are generally classified into two types, system-level commands and label format commands.

System-level commands are used for system-level operations such as printer status output, sensor selection and memory card maintenance. On the other hand, label format commands are used for definition of printing contents such as character data, bar code data, printing speed, and print density.

System-level commands start with ASCII "SOH" or "STX."  
Commands which start with "SOH" are required for real-time execution. When received, they are executed immediately even during printing.  
Commands which start with "STX" enter the buffer area once and then are executed in the order of data reception.

Label format commands end with "CR", following the system-level commands "STX" + "L".

System-level commands start with "SOH" or "STX"	Commands to start with "SOH" Executed immediately after receiving data (e.g. printing stop, printer status output etc.)
	Commands to start with "STX" Executed in sequence after inputting into the receive buffer (e.g. sensor switching, memory card maintenance etc.)

"STX" + "L" ↓

↑



"E" (with printing)

"X" (without printing)

Label format commands end with "CR"	Print parameter control
	Character data definition commands
	Bar code definition commands
	Graphic commands
	Other commands

6.4 Example of Connection to a Computer

When RS-232C is used:  
IBM PC compatible  
Communication control: XON/XOFF or CTS/DTR

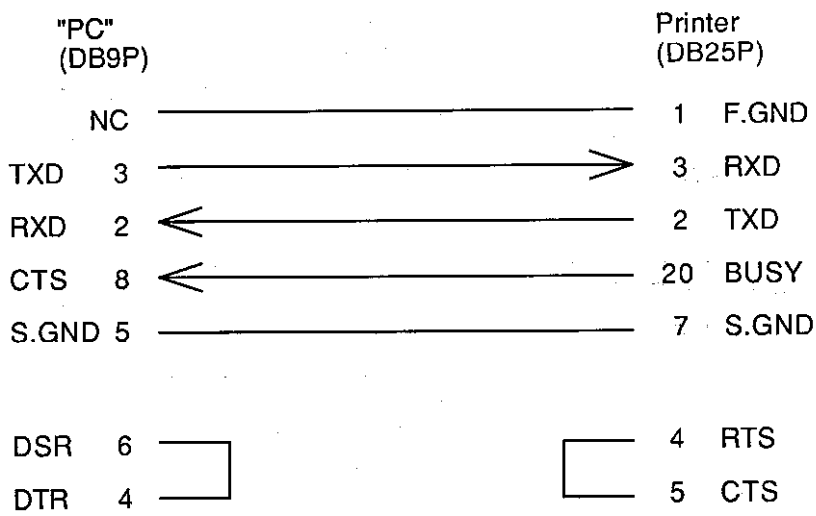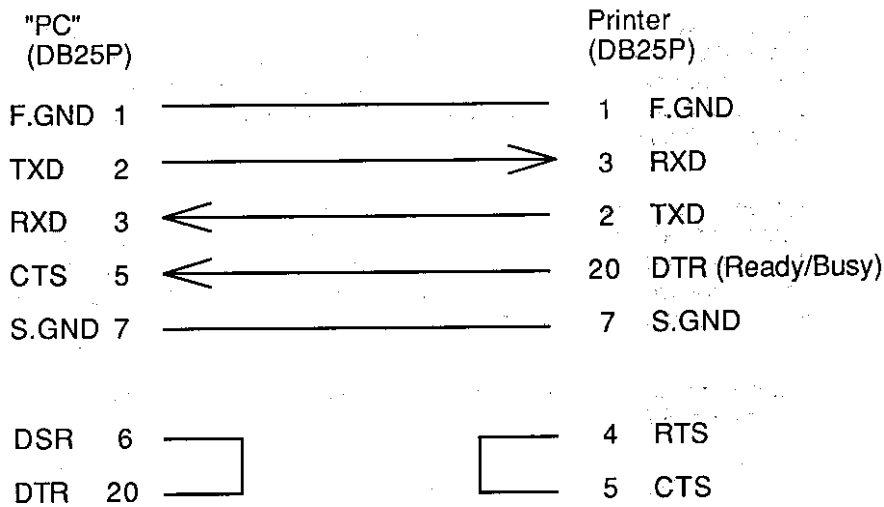



## 6.5 Tear-Off Function

The tear-off function eliminates the waste of labels when tearing manually. It allows the paper to automatically advance to the tear position after printing.

When this function is turned on, the paper will be fed to the manual tear position after printing. The printer will feed back paper to the start print position when the next print job is sent.

If data is transmitted continuously from the computer, the tear-off function will be suppressed to increase throughput.

### 6.5.1 Turning Tear ON/OFF

Tear can be turned to ON or OFF from the control panel. Default is OFF.

Indications on the control panel are as follows:

	Tear-off function invalid	Tear-off function valid
LCD indication	"Tear OFF"	"Tear ON"


### 6.5.2 Tear-off when printing

If set, the tear-off function will start if no print data is transmitted for 0.5 second after printing. If data is transmitted continuously from the computer, the tear-off function will be suppressed.

Tear-off is only performed for the final label of each batch processing.


(The tear-off function is not performed until the specified number of print sheets is completed.)

- The paper is fed to the tear position

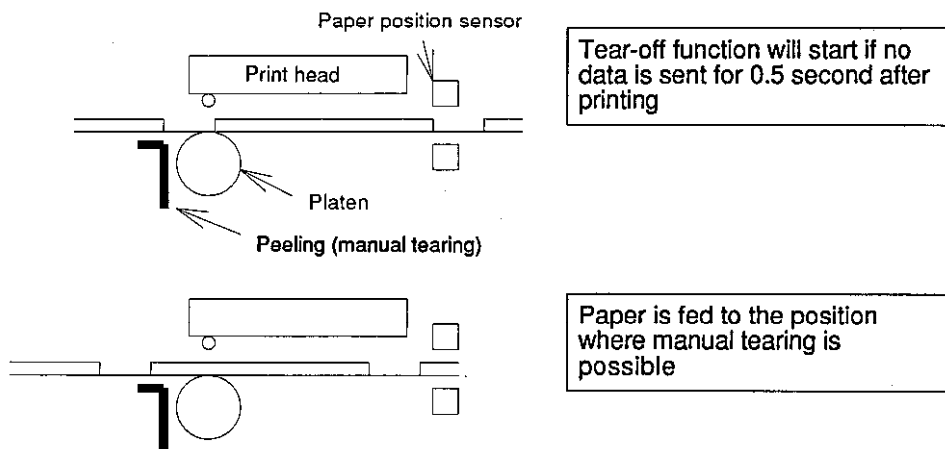

- When manual tearing is needed, tear the label at this time.
- Performs next label printing.

When next print data is transmitted from the computer, the printer feeds back paper to the previous print completed position and resumes printing.

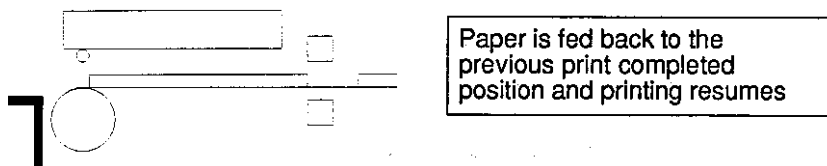

### 6.5.3 Tear-off when feeding

- If no print data is transmitted for 0.5 second after feeding, the tear-off function will start. If the Feed key is pressed again before starting the tear-off function, the printer will start feeding without tear-off function.
- Paper is fed to the tear position
- When manual tearing is needed, tear the label at this time.
- Performs the next feeding or label printing

If the Feed key is pressed or next print data is transmitted from the computer, the printer feeds back paper to the previous print completed position and resumes feeding or printing.

#### 6.5.4 Tear-off and type of data

When the tear-off is valid, the printer monitors the print data for 0.5 second during or after printing. If print data is transmitted within 0.5 second during or after printing, the printer will start the next printing without tear-off. (When data is received during printing, the time of monitoring 0.5 second is not inserted.)

The commands for this printer are mainly classified into the immediately execution commands starting with "SOH" and the sequentially execution commands starting with "STX." In tear-off function, only the sequentially execution commands related to print processing contents are monitored but the immediately execution commands are not monitored.


Therefore, even if the printer status or the remaining number of print sheets is read out by using the immediately execution commands during printing, the tear-off will be performed after printing. On the other hand, if the sequentially execution commands are used during printing or within 0.5 second after printing to transmit print-related data, the printer will start the next printing without tear-off. (For details, see the Command Reference.)

#### 6.5.5 Cut position adjustments

- The cut position can be set with the "fnnn" of the system-level commands. When the tear-off function is turned on, the following initialization value is set in the printer.

Initialization value: fnnn = f701 (70.1 mm)

The values higher or lower will increase or decrease the amount of feeding in the tear-off function.

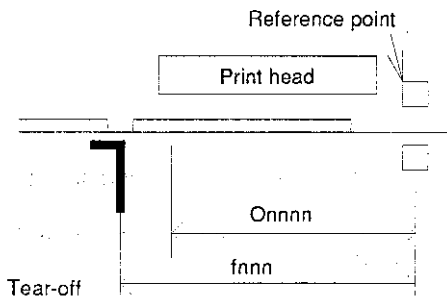

Onnnn: Paper position specifying

fnnn: Feed position specifying

fnnn ≤ Onnnn  
Feeding or feeding back is not performed

fnnn > Onnnn  
Feeding or feeding back is performed

- Parameter initialization values

Initialization values for printing and peeling positions are described below.

Unit: mm (inch)

	Normal printing	Auto- cutter	Peeling	Tear-off	Minimum value
Print position (Onnnn, form offset)	55.9 (2.2)	55.9 (2.2)	55.9 (2.2)	55.9 (2.2)	12.7 (0.5)
Cut position (fnnn)	55.9 (2.2)	*	*	70.1 (2.8)	12.7 (0.5)

If values lower than the minimum values are set, the initialization values will be set instead. (For values with mark \*, see the separate option operation manuals.)

#### 6.5.6 When "fnnn" command is executed while tear-off function is OFF

Even with the tear-off function OFF, the paper will be fed to the "fnnn"-specified position after printing if an "fnnn > Onnnn" value is set by using the "fnnn" command.

This function will be used for such case as another device is incorporated in the printer.

To perform operation with the FARGO, the following is different from those in the tear-off function ON:

- The paper is fed immediately after printing, whereas, in the tear-off function ON the paper is fed when no data is transmitted for 0.5 second after printing.

However, if the next print data is transmitted during printing, the printer will start the next printing without feeding or feeding back.

#### 6.5.7 Priority order

The following three functions (optional) cannot be performed simultaneously.

If commands for three functions are received simultaneously, the printer will operate in the following priority order:

1st: Auto-cutter

2nd: Peeler

3rd: Tear-off function