

7 Inch Monitor

Quick Installation Guide



Product Standard

Specification	CUSTOMER 7"INCH MONITOR
LCD Panel	Size: 7" TFT-LCD Display Area: 154.08(W) x 85.92(H) mm Pixel Pitch: 0.0642(W) x 0.1790(H) mm
Frequency	Horizontal: 30~80kHz Vertical: 56~75kHz
Color	16.2M
Resolution	Optimum: 800 x 480@60Hz Maximum: 1024 x 768@75Hz
Computer Connection	15 pin D-SUB Cable
Max. Pixel Clock	33.3 MHz
Power Voltage	DC 12Volts
Dimension (W x H x H)	181.5 x 120.5 x 38.1mm
Environment	Operating Temperature: 0℃~40℃ (32°F~104°F) Storage Temperature: -30℃~85℃ (-22°F~185°F)
Plug & Play	This monitor can be installed in any Plug&Play compatible system Monitor set-up is optimized by data exchange between monitor and computer system. Users can select different set-up but monitor installation can be done automatically in most cases.
Panel Dot	1 ppm(1/1,000,000) pixel can be brighter or darker on this monitor due to technical limit of production process. This does not give an effect on panel capability.
OSD(On Screen Display)	5KEY support (Menu, Select, Down, Up, Power)
Power Supply	60W SMPS AC Input: 110~240v, 50~60Hz, 1A DC Output: 12V, 5.0A
Others	Particular model provide 'Y-CABLE'. 


7" DISPLAY INSTALL MANUAL



1. Remove the top cover (Rear-Dummy) at rear side of the product.

2. Flip the product, and unscrew the 4 bolts (Coin-Screw) from the Hinge-Ass'y.


3. Remove the Stand-Ass'y from the product same as above picture.

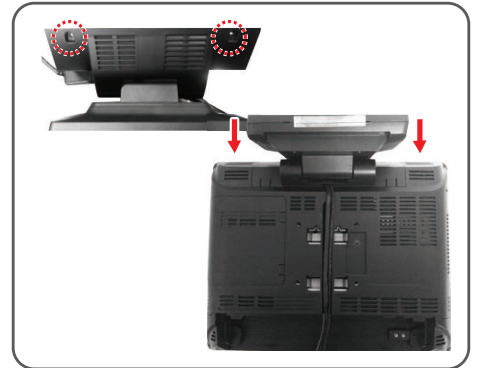

4. Remove the bottom cover (Cover-Wire) from the product same as above picture.

5. Arrange the 2 cables same as above picture.

6. Assemble the 7" Display Ass'y on the cabinet, make the 2 cables place the furrow in the middle of it, and then screw 2 bolts in the two holes.

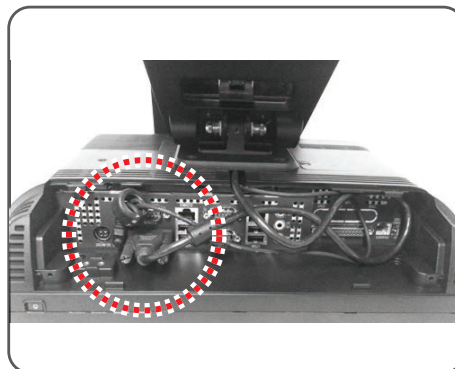


7. Assemble the stand assy, and screw the 4 Coin-Screws.

8. Plug the 7" Display cables to the I/O same as the above picture.


9. Assemble Cover-Wire to the cabinet.

Set up Dual Monitor on Windows POSReady 2009 (ENG)


STEP 1. Right Click on the Windows Wallpaper
→ Select 'Properties'




STEP 2. Select ① Monitor → Check at the checkbox of
② 'Extend My Windows desktop onto this monitor'
→ Click ③ Advanced.

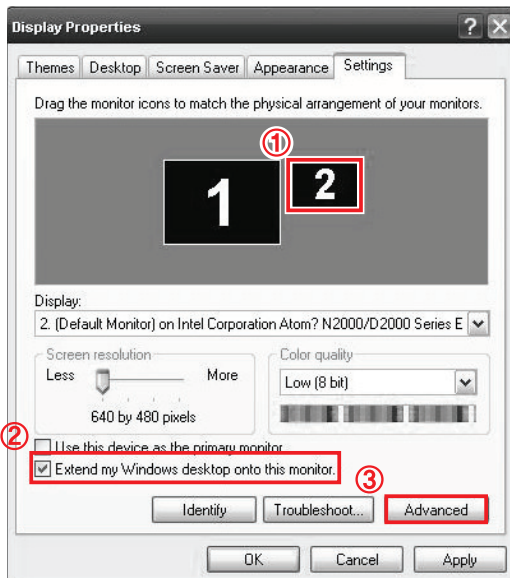


STEP 3. Select ① Adapter Tab → Click ② List All Modes...

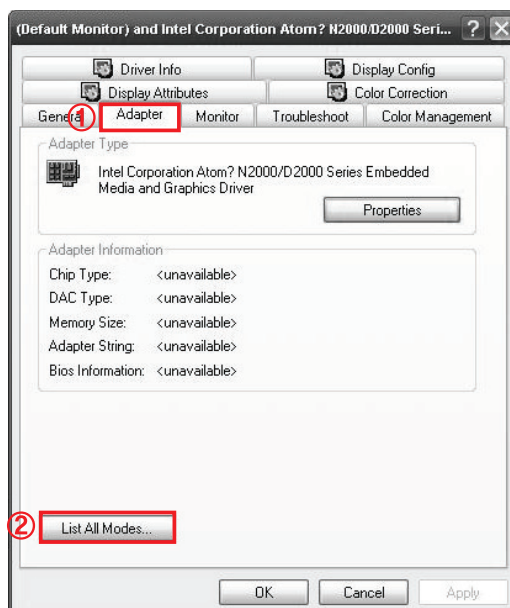


STEP 4. Select ① '800 x 480, True Color (32bit), 60Hertz'
→ Click ② OK

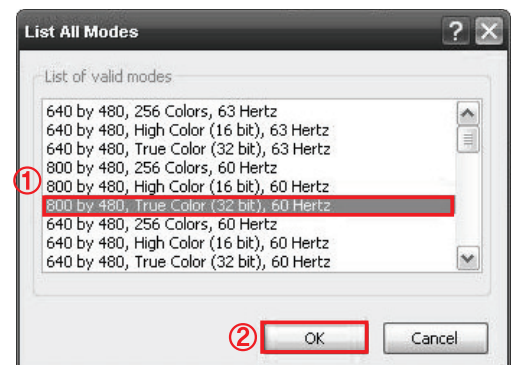

STEP 5. Click ① Apply → Click ② Yes on the pop-up window.

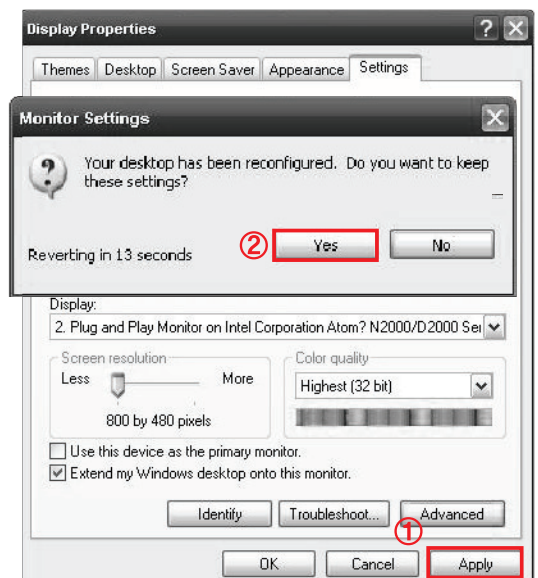


STEP 6. Press the ① Select Button on the Dual 7 inch display. The 7 inch display will be initialized.
→ Press ② Menu button. Menu window will be appeared. Please see the bottom side of the window, and check the resolution is RGB 800 x 480 60Hz.

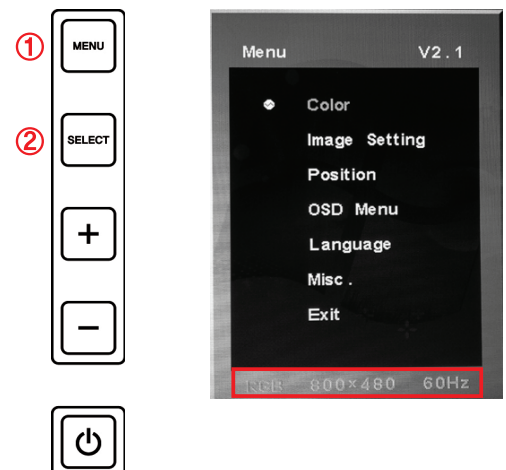


Set up Dual Monitor on Windows POSReady 7 (ENG)

STEP 1. Right Click on the Windows Wallpaper → Select 'Screen resolution'




STEP 2. Select ① Monitor → Select ② 'Extend these displays' at the drop down menu of Multiple displays.

Change the appearance of your displays

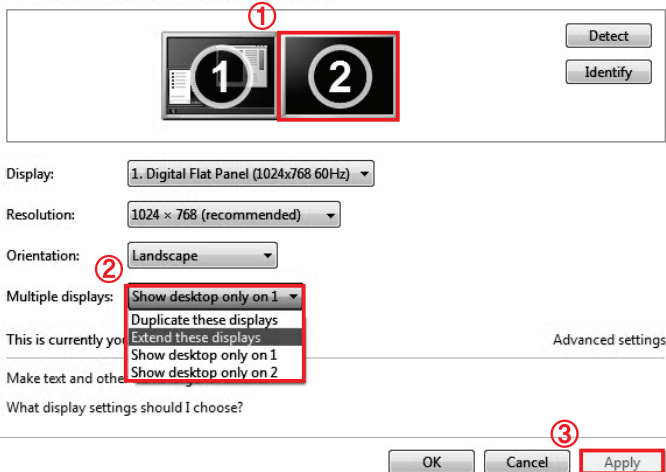


STEP 3. Select ① Monitor → Click ② 'Advanced settings'


Change the appearance of your displays

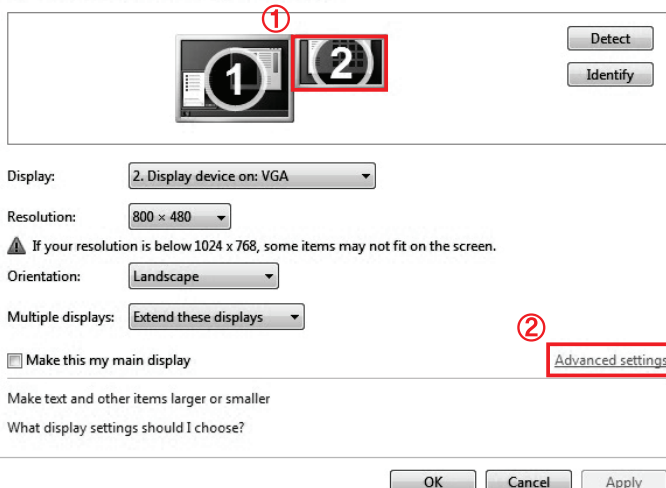

STEP 4. Select ① Adapter Tab → Click ② List ALL Modes.

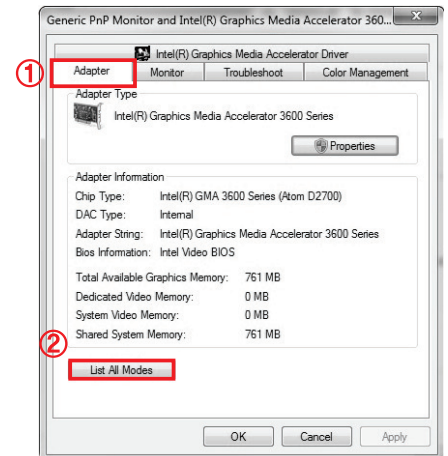

STEP 5. Select ① '800 by 480, True Color (32bit), 60 Hertz' → Click OK → Click ③ Apply

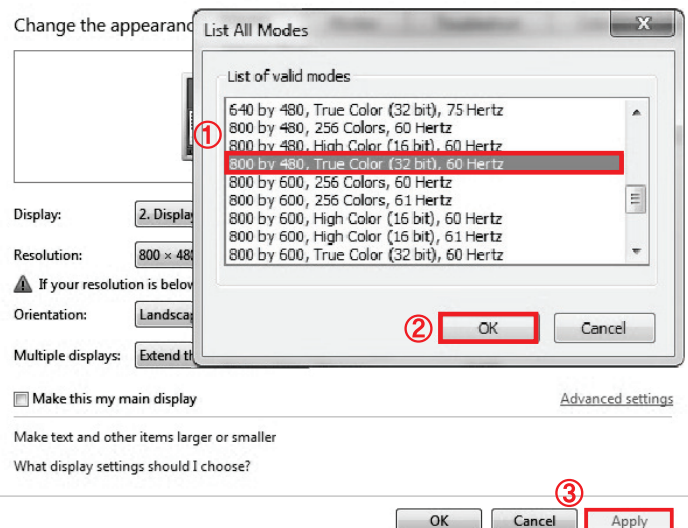

STEP 6. Press the ① Select Button on the Dual 7 inch display. The 7 inch display will be initialized. → Press ② Menu button. Menu window will be appeared. Please see the bottom side of the window, and check the resolution is RGB 800 x 480 60Hz.

