

Parts List for CBM-262

Unit, Main PCB (RS-232C)

Sheet No. 1/3

Rev. No. 1

Item No.	Part No.	Part Name	Type	Q'ty	Manufacturer	Location
1	PC66804-0	Unit, Main PCB(with ROM)	<for Japan>	1		
2	PC66806-0	Unit, Main PCB(with ROM)	<for USA/Europe>	1		
3	PC94702-0	ROM-Set 3(Prog.+C.G.)		1		IC4
4	C2304-615 (C2304-615) (C2304-615)	EP-ROM(Brank)	AM27C512-150 M27C512-15 MX27C512-15	1	AMD SGS-Tomson Macronix	(IC4)
5	AF99916-00	Label, ROM	K5688-411	1	Central	(IC4)
6	PC94703-0	ROM-Set 4(Prog.+C.G.)		1		IC5
7	C2304-615 (C2304-615) (C2304-615)	EP-ROM(Brank)	AM27C512-150 M27C512-15 MX27C512-15	1	AMD SGS-Tomson Macronix	(IC5)
8	AF99916-00	Label, ROM	K5688-411	1	Central	(IC5)
9	PC66704-0	SA, Main PCB(without ROM)	<for Japan>	1		
10	PC66706-0	SA, Main PCB(without ROM)	<for USA/Europe>	1		
11	C2900-052	IC(Reset)	PST591DMT	1	Mitsumi	IC1
12	C2400-009	CPU	M37720S1AFP	1	Mitsubishi	IC2
13	C2323-610 (C2323-610)	RAM(Pseudo Static)	LC33864M-10 LC33864ML-10	2	Sanyo Sanyo	IC3, 16
14	PC95900-0	Mask ROM(C.G.)<for Japan>	LH5348R7	1	Sharp	IC6
15	PC95900-0	Mask ROM(C.G.)<for USA/Europe>	LH5348R7	0	Sharp	IC6
16	C2320-009 (C2320-008) (C2320-010) (C2320-015) (C2320-016) (C2320-017)	EEP-ROM	LE24C01MI-TE-L 24C01A-/SN ST24C01M1 AT24C01A-10SC BR24C01AF XL24C01AF	1	Sanyo Microchip SGS-Thomson Atmel Rohm Exel	IC7
17	C2527-402	Gate Array	M6513FP	1	Mitsubishi	IC8
18	C2216-373	IC(CMOS)	HD74HC373FP	1	Hitachi	IC9
19	C2262-032	IC(CMOS)	HD74AC32FP	1	Hitachi	IC10
20	C2216-000	IC(CMOS)	HD74HC00FP	1	Hitachi	IC11
21	C2900-057	IC(I/F)	μPD4721	1	NEC	IC12
22	C2709-001	IC(Drive)	MTD2003F	2	Shindengen	IC13,14
23	C2703-428	IC(Drive)	TA8428K	1	Toshiba	IC15
24	C2603-393 (C2603-393) (C2603-393) (C2603-393) (C2603-393)	IC(Comparator)	BA10393F LM393PS LM393D LM393M LM393M	1	Rohm T.I. Motorola Motorola N.S.	IC19
25	C3402-143	Transistor	2SD2143	2	Rohm	TR1,2
26	C3903-046	Transistor	2SJ302-Z	1	NEC	TR4

Parts List for CBM-262

Unit, Main PCB (RS-232C)

Sheet No. 2/3

Rev. No. 1

Item No.	Part No.	Part Name	Type	Q'ty	Manufacturer	Location
1	C3905-015	Transistor(Res.)	FMA4A	1	Rohm	DTRA1
2	C3905-006	Transistor(Res.)	DTA114WK	2	Rohm	DTR1,4
3	C3905-014	Transistor(Res.)	DTC114WK	1	Rohm	DTR2
4	C3621-001 (C3621-002) (C3621-000) (C3621-003)	Diode(Silicon)	MA151WK MA152WK DAN202K DCB010	1	Matsushita Matsushita Rohm Sanyo	D1
5	C3629-000	Diode(Silicon)	MA153	1	Matsushita	D5
6	C3610-044	Diode(Silicon)	RB420D	1	Rohm	D6
7	C7425-166	Oscillator(Ceramic)	EFOEC1605C4	1	Matsushita	Y1
8	C6180-093	Connector	TCS7960-53-2010	1	Hoshiden	CN1
9	C6149-142	Connector	17LE-13250-27(D41)	1	DDK	CN2
10	C6149-143	Connector	285D-7660J-101	1	DDK	CN3
11	C6198-713	Connector	13FE-BT-VK-N	2	JST	CN4,6
12	C6196-716	Connector	B16B-PH-K-S	2	JST	CN5,7
13	C6196-706	Connector	B6B-PH-K-S	1	JST	CN8
14	C7100-128	IC Socket	DILB28P-8J	2	Burndy	IC4,5
15	C7219-020	Switch(Dip)	SSGM18	1	Alps	SW1
16	C7219-021	Switch(Dip)	SSGM14	1	Alps	SW2
17	C7602-104	Switch(Power)	SF-W1P1A-14BB	1	Echo Elec.	SW3
18	C5270-053	Cap.Chip	B,±10%,50V,0.01μF	30		C1~14,16,24~28,33,40,44 51,53,57,58,63,64,73
19	C5270-051	Cap.Chip	CH,±5%,50V,1000pF	2		C15,32
20	C5270-044	Cap.Chip	CH,±5%,50V,30pF	7		C17~23
21	C5270-170	Cap.Chip	F,±5%,50V,0.1μF	1		C59
22	C5190-474	Cap.Electrolytic	35WA1000Mφ16×L16	1	Rubycon	EC1
23	C5190-475	Cap.Electrolytic	6.3REV100Mφ6.3×L5.5	1	Rubycon	EC2
24	C5190-476	Cap.Electrolytic	16REV22Mφ5×L5.5	5	Rubycon	EC4~8
25	C2800-046	IC(Regulator)	SI-8401L	1	Sanken	REG1
26	C7302-365	Microton Fuse	TR/3216FF·1.5A	2	Bussmann	F1,3
27	C7510-090	Coil	PLT1R53C	1	Murata	L1
28	C4932-035	Res.Chip	1/10W,±1%,10KΩ	2		R1,57
29	C4932-052	Res.Chip	1/10W,±5%,2KΩ	1		R2
30	C4922-332	Res.Chip	1/10W,±5%,3.3KΩ	31		R3,6,8~11,15~17,19~25 27,28,30,32,34~38,40~43 46,54
31	C4922-105	Res.Chip	1/10W,±5%,1MΩ	1		R4
32	C4922-101	Res.Chip	1/10W,±5%,100Ω	1		R5
33	C4922-102	Res.Chip	1/10W,±5%,1KΩ	1		R12
34	C4922-271	Res.Chip	1/10W,±5%,270Ω	2		R14,29

Parts List for CBM-262

Unit, Main PCB (RS-232C)

Sheet No. 3/3

Rev. No. 1


Item No.	Part No.	Part Name	Type	Q'ty	Manufacturer	Location
1	C4922-753	Res.Chip	1/10W,±5%,75KΩ	2		R18,33
2	C4932-063	Res.Chip	1/10W,±1%,30KΩ	2		R26,39
3	C4922-512	Res.Chip	1/10W,±5%,5.1KΩ	1		R48
4	C4922-103	Res.Chip	1/10W,±5%,10KΩ	3		R49,59,61
5	C4932-016	Res.Chip	1/10W,±1%,3.3KΩ	1		R58
6	C4922-104	Res.Chip	1/10W,±5%,100KΩ	1		R60
7	C4922-000	Res.Chip	1/10W,0Ω(Jumper)	19		C52,FB1~14,JP1,2,5,6
8	C4920-000	Res.Chip	1/8W,0Ω(Jumper)	1		F2
9	C4494-002	Res.Array(Chip)	EXBS8V332J	7	Matsushita	RN1~7

Parts List & Location for Unit, Main PCB (Centronics)

Revision Up List		
Sheet No.	Rev.No.	Date
1/2	1	Jun.18.1996
2/2	1	Jun.18.1996


Sample layout Main PCB (Centronics)

<Parts side>

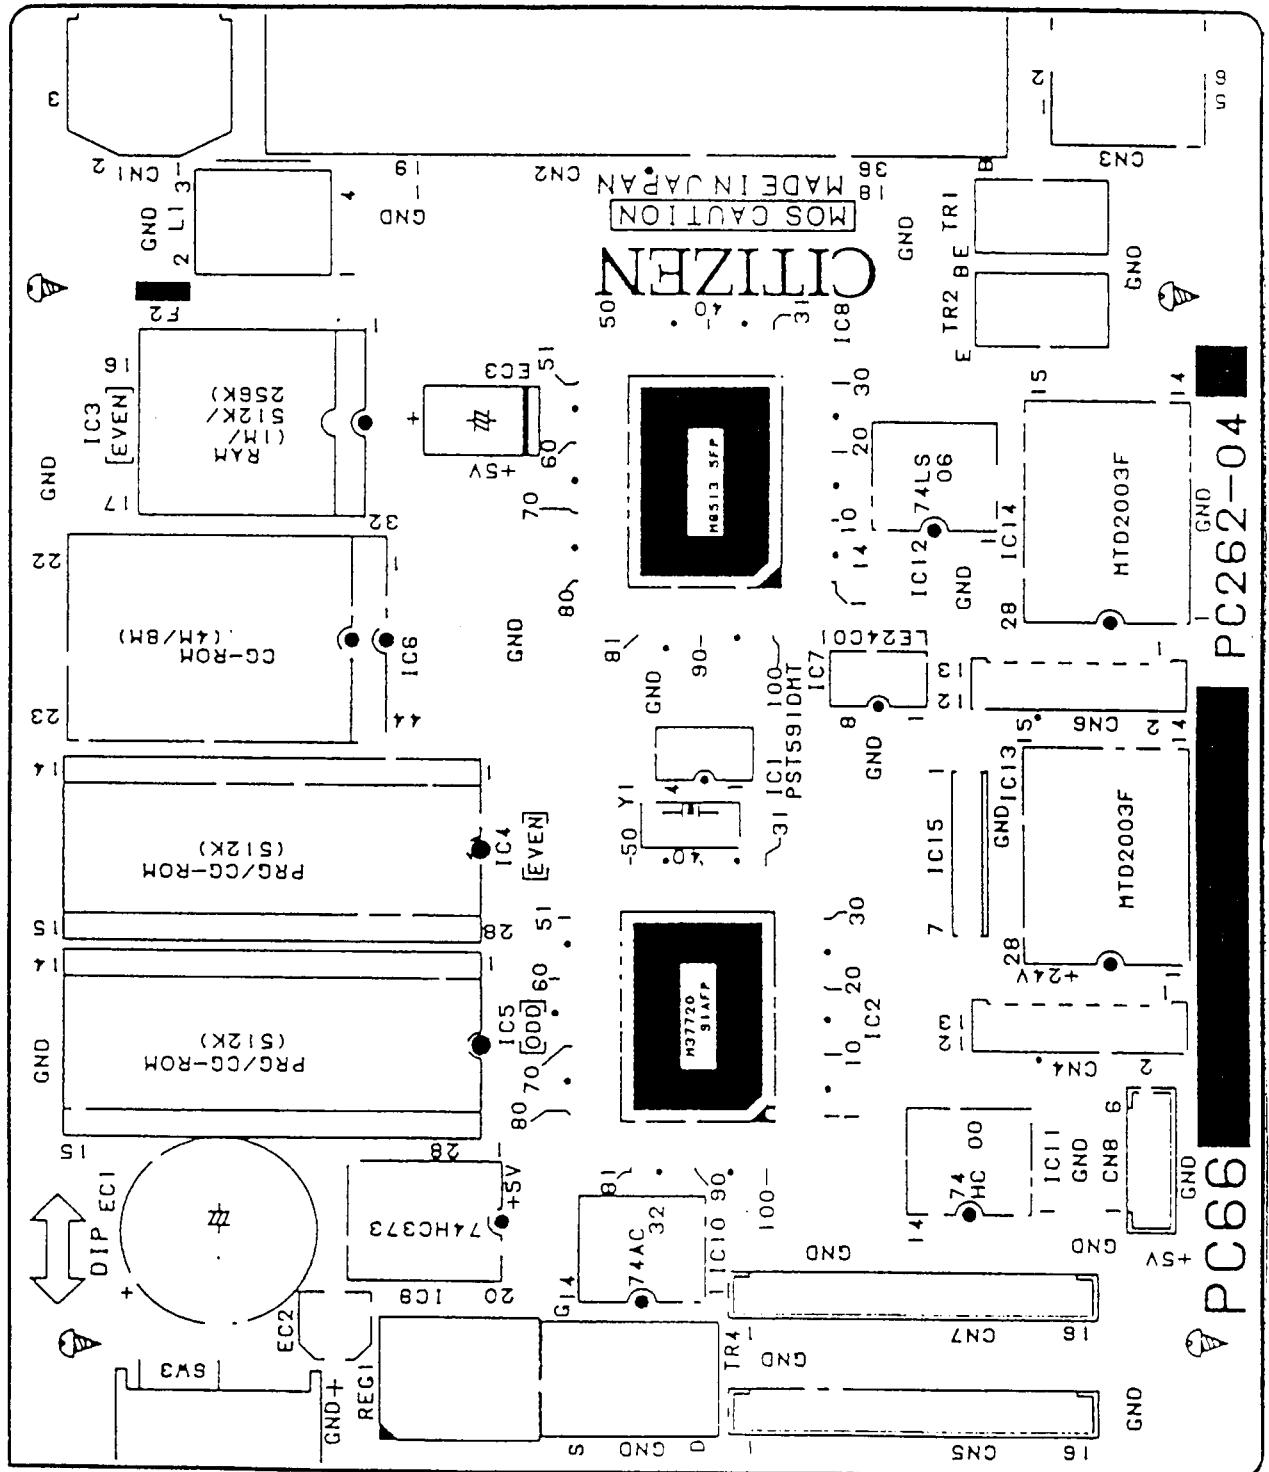

Sample layout Main PCB (Centronics)

<Soldered side>

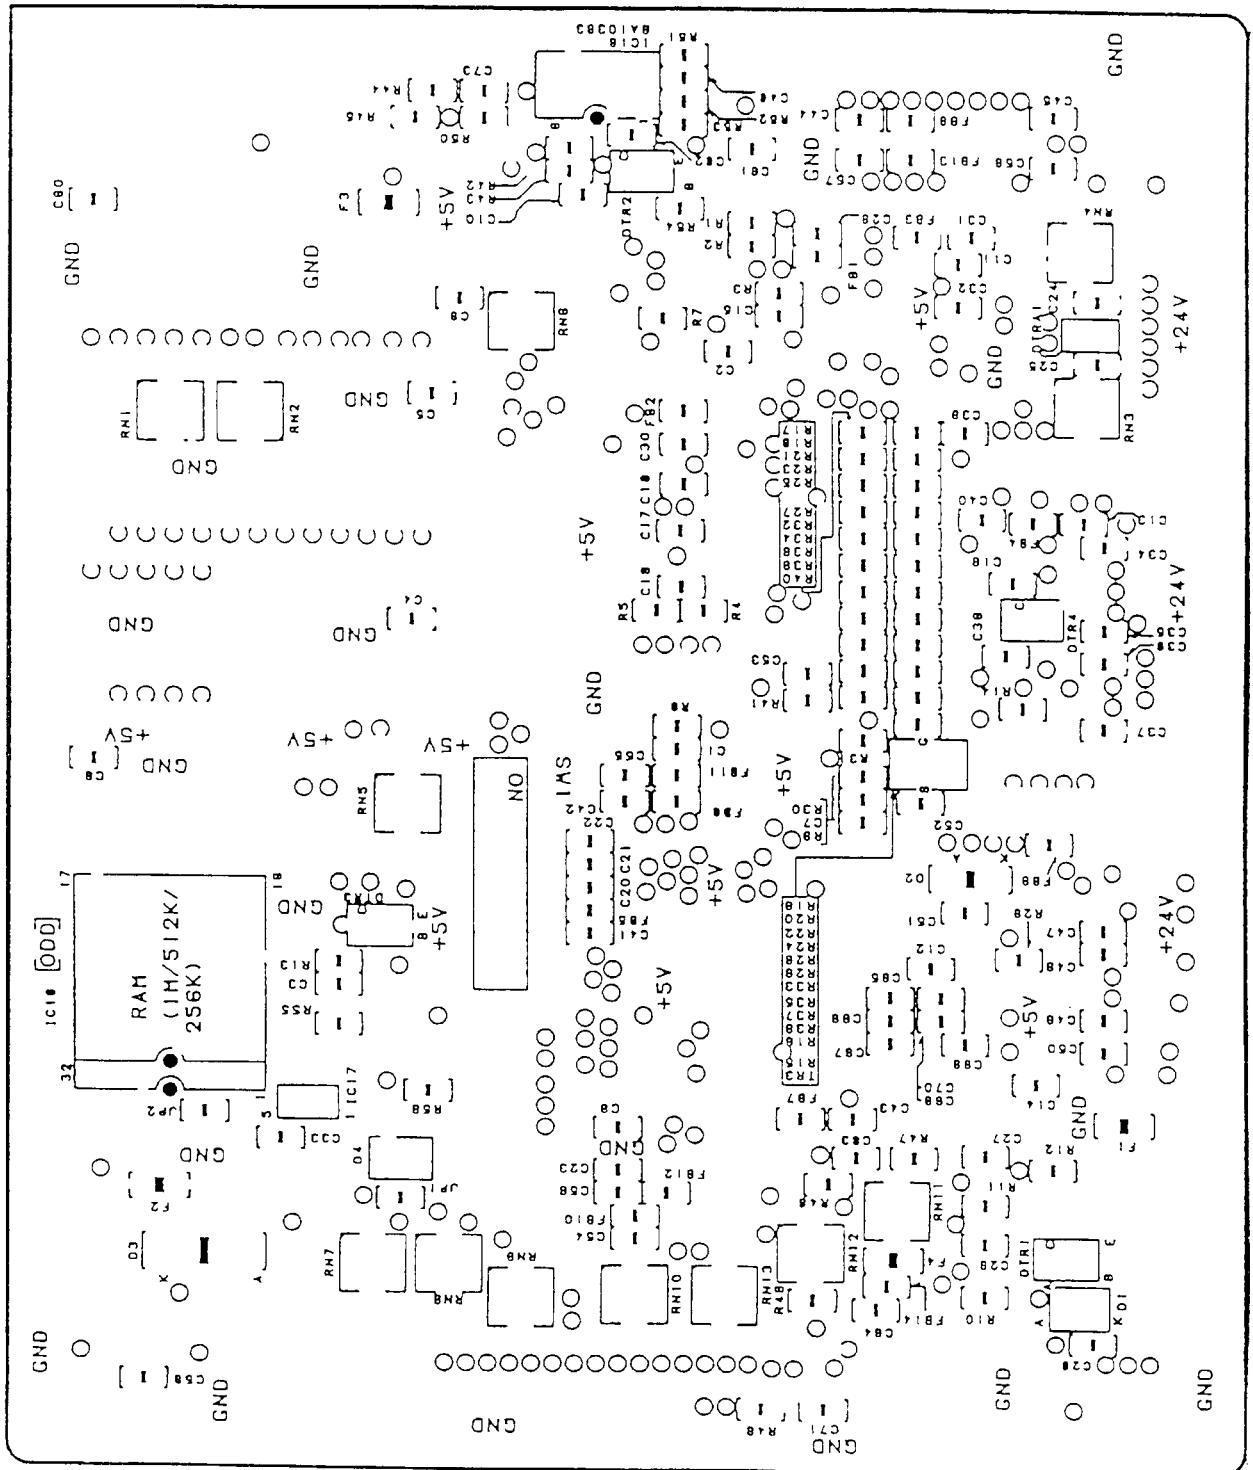

Parts List for CBM-262

Unit, Main PCB (Centronics)

Sheet No. 1/2

Rev. No. 1

Item No.	Part No.	Part Name	Type	Q'ty	Manufacturer	Location
1	PC66805-0	Unit, Main PCB(with ROM)	<for Japan>	1		
2	PC66807-0	Unit, Main PCB(with ROM)	<for USA/Europe>	1		
3	PC94702-0	ROM-Set 3(Prog.+C.G.)		1		IC4
4	C2304-615 (C2304-615) (C2304-615)	EP-ROM(Brank)	AM27C512-150 M27C512-15 MX27C512-15	1	AMD SGS-Tomson Macronix	(IC4)
5	AF99916-00	Label, ROM	K5688-411	1	Central	(IC4)
6	PC94703-0	ROM-Set 4(Prog.+C.G.)		1		IC5
7	C2304-615 (C2304-615) (C2304-615)	EP-ROM(Brank)	AM27C512-150 M27C512-15 MX27C512-15	1	AMD SGS-Tomson Macronix	(IC5)
8	AF99916-00	Label, ROM	K5688-411	1	Central	(IC5)
9	PC66705-0	SA, Main PCB(without ROM)	<for Japan>	1		
10	PC66707-0	SA, Main PCB(without ROM)	<for USA/Europe>	1		
11	C2900-052	IC(Reset)	PST591DMT	1	Mitsumi	IC1
12	C2400-009	CPU	M37720S1AFP	1	Mitsubishi	IC2
13	C2323-610 (C2323-610)	RAM(Pseudo Static)	LC33864M-10 LC33864ML-10	2	Sanyo Sanyo	IC3, 16
14	PC95900-0	Mask ROM(C.G.)<for Japan>	LH5348R7	1	Sharp	IC6
15	PC95900-0	Mask ROM(C.G.)<for USA/Europe>	LH5348R7	0	Sharp	IC6
16	C2320-009 (C2320-008) (C2320-010) (C2320-015) (C2320-016) (C2320-017)	EEP-ROM	LE24C01M1-TE-L 24C01A-/SN ST24C01M1 AT24C01A-10SC BR24C01AF XL24C01AF	1	Sanyo Microchip SGS-Tomson Atmel Rohm Exel	IC7
17	C2527-402	Gate Array	M65135FP	1	Mitsubishi	IC8
18	C2216-373	IC(CMOS)	HD74HC373FP	1	Hitachi	IC9
19	C2262-032	IC(CMOS)	HD74AC32FP	1	Hitachi	IC10
20	C2216-000	IC(CMOS)	HD74HC00FP	1	Hitachi	IC11
21	C2108-006	IC(TTL)	HD74LS06FP	1	Hitachi	IC12
22	C2709-001	IC(Drive)	MTD2003F	2	Shindengen	IC13,14
23	C2703-428	IC(Drive)	TA8428K	1	Toshiba	IC15
24	C3402-143	Transistor	2SD2143	2	Rohm	TR1,2
25	C3903-046	Transistor	2SJ302-Z	1	NEC	TR4
26	C3905-015	Transistor(Res.)	FMA4A	1	Rohm	DTRA1
27	C3905-006	Transistor(Res.)	DTA114WK	2	Rohm	DTR1,4
28	C3905-014	Transistor(Res.)	DTA114WK	1	Rohm	DTR2
29	C7425-166	Oscillator(Ceramic)	EFOEC1605C4	1	Matsushita	Y1

Parts List for CBM-262

Unit, Main PCB (Centronics)

Sheet No. 2/2
Rev. No. 1


Item No.	Part No.	Part Name	Type	Q'ty	Manufacturer	Location
1	C3621-001 (C3621-002) (C3621-000) (C3621-003)	Diode(Silicon)	MA151WK MA152WK DAN202K DCB010	1	Matsushita Matsushita Rohm Sanyo	D1
2	C6180-093	Connector	TCS7960-53-2010	1	Hoshiden	CN1
3	C6149-145	Connector	57RE-40360-830B(D29)	1	DDK	CN2
4	C6149-143	Connector	285D-7660J-101	1	DDK	CN3
5	C6198-713	Connector	13FE-BT-VK-N	2	JST	CN4,6
6	C6196-716	Connector	B16B-PH-K-S	2	JST	CN5,7
7	C6196-706	Connector	B6B-PH-K-S	1	JST	CN8
8	C7100-128	IC Socket	DILB28P-8J	2	Burndy	IC4,5
9	C7219-020	Switch(Dip)	SSGM18	1	Alps	SW1
10	C7602-104	Switch(Power)	SF-W1P1A-14BB	1	Echo Elec.	SW3
11	C5270-053	Cap.Chip	B,±0%,50V,0.01μF	30		C1~14,16,24~28,33,40,44 51,53,57,58,64,71,73
12	C5270-051	Cap.Chip	CH,±5%,50V,1000pF	3		C15,32,63
13	C5270-044	Cap.Chip	CH,±5%,50V,30pF	7		C17~23
14	C5270-170	Cap.Chip	F,±5%,50V,0.1μF	1		C59
15	C5270-121	Cap.Chip	CH,±5%,50V,100pF	6		C65~70
16	C5190-474	Cap.Electrolytic	35WA1000Mφ16×L16	1	Rubycon	EC1
17	C5190-475	Cap.Electrolytic	6.3REV100Mφ6.3×L5.5	1	Rubycon	EC2
18	C2800-046	IC(Regulator)	SI-8401L	1	Sanken	REG1
19	C7302-365	Microton Fuse	TR/3216FF-1.5A	2	Bussmann	F1,3
20	C7510-090	Coil	PLT1R53C	1	Murata	L1
21	C4932-035	Res.Chip	1/10W,±1%,10KΩ	1		R1
22	C4932-052	Res.Chip	1/10W,±1%,2KΩ	1		R2
23	C4922-105	Res.Chip	1/10W,±5%,1MΩ	1		R4
24	C4922-332	Res.Chip	1/10W,±5%,3.3KΩ	33		R3,7~11,15~17,19~25,27 28,30,32,34~38,40~43,46 48,49,54
25	C4922-101	Res.Chip	1/10W,±5%,100Ω	2		R5,47
26	C4922-102	Res.Chip	1/10W,±5%,1KΩ	1		R12
27	C4922-271	Res.Chip	1/10W,±5%,270Ω	2		R14,29
28	C4922-753	Res.Chip	1/10W,±5%,75KΩ	2		R18,33
29	C4932-063	Res.Chip	1/10W,±1%,30KΩ	2		R26,39
30	C4922-000	Res.Chip	1/10W,0Ω(Jumper)	17		C52,FB1~14,JP1,2
31	C4920-000	Res.Chip	1/8W,0Ω(Jumper)	2		F2,4
32	C4494-002	Res.Array(Chip)	EXBS8V332J	13	Matsushita	RN1~13

Parts List & Location for SA, Ope-Pane PCB 1


Revision Up List		
Sheet No.	Rev.No.	Date
1/1	1	Jun.18.1996

Sample layout Ope-Pane PCB

<Parts side>

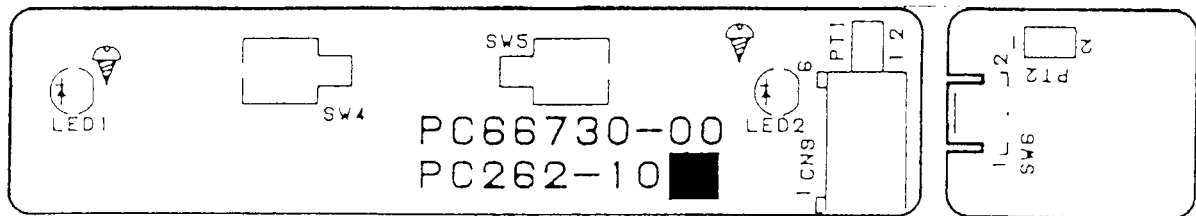

<Soldered side>

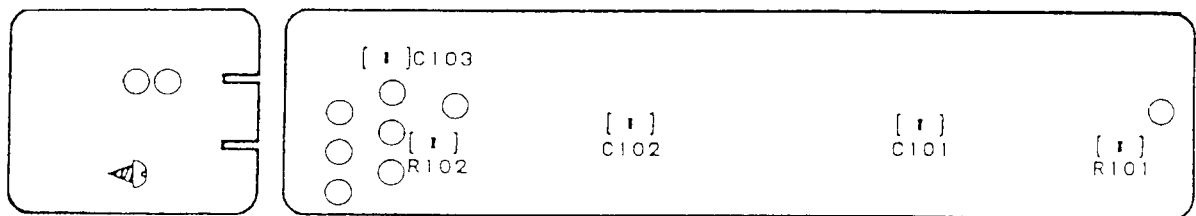

Parts List for CBM-262

SA, Ope-Pane PCB 1

Sheet No. 1/1

Rev. No. 1


Item No.	Part No.	Part Name	Type	Q'ty	Manufacturer	Location
1	PC66730-0	SA,Ope-Pane PCB 1		1		
2	C3803-054	LED	SEL6510G	1	Sanken	LED1
3	C3803-056	LED	SEL6810D	1	Sanken	LED2
4	C7640-023	Switch(Key)	EVQ-233-04M	2	Matsushita	SW4,5
5	C7642-006	Switch(Detector)	SW-114S	1	Shinmei	SW6
6	C5270-053	Cap.Chip	B,±10%,50V,0.01μF	3	Murata	C101~103
7	C4922-181	Cap.Chip	1/10W,±5%,180Ω	1	Matsushita	R101
8	C4922-271	Cap.Chip	1/10W,±5%,270Ω	1	Matsushita	R102
9	PC67950-0	Cable,Cover Sensor 1	SMV2RJ-B-7/0.16 (OM-1S)×2×60 P2.0 53-M UL-2651	1	Sumitomo	PT1-2
10	C6198-506	Connector	S6B-PH-K-S	1	JST	CN9

Parts List & Location for SA, Connect PCB 1


Revision Up List		
Sheet No.	Rev.No.	Date
1/1	1	Jun.18.1996

Sample layout Connect PCB 1

<Parts side>

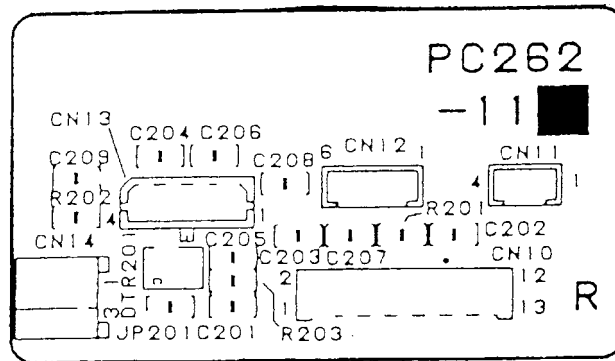

<Soldered side>

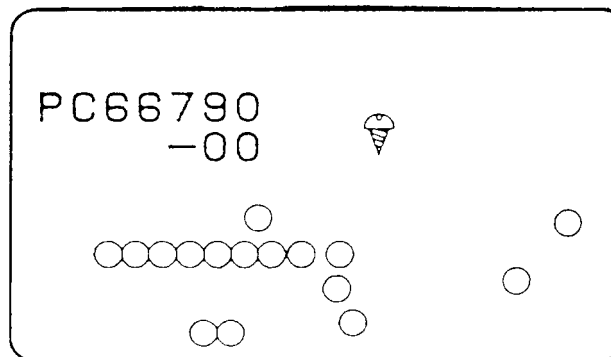

Parts List for CBM-262

SA, Connect PCB 1

Sheet No. 1/1

Rev. No. 1


Item No.	Part No.	Part Name	Type	Q'ty	Manufacturer	Location
1	PC66790-0	SA,Connect PCB 1		1		
2	C6198-713	Connector	13FE-BT-VK-N	1	JST	CN10
3	C6196-804	Connector	53047-0410	1	Molex	CN11
4	C6196-806	Connector	53047-0610	1	Molex	CN12
5	C6198-404	Connector	5267-04AX	1	Molex	CN13
6	C6198-502	Connector	S2B-PH-K-S	1	JST	CN14
7	C5270-053	Cap.Chip	B,±10%,50V,0.01μF	6	Murata	C201~205,207
8	C4922-181	Res.Chip	1/10W,±5%,180Ω	1	Matsushita	R201
9	C4922-000	Res.Chip	1/10W,0Ω(Jumper)	2	Matsushita	R202,JP201

Parts List & Location for SA, Connect PCB 2


Revision Up List		
Sheet No.	Rev.No.	Date
1/1	1	Jun.18.1996

Sample layout Connect PCB 2

<Parts side>

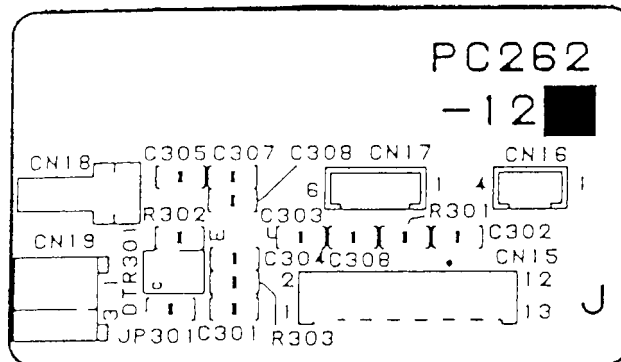

<Soldered side>

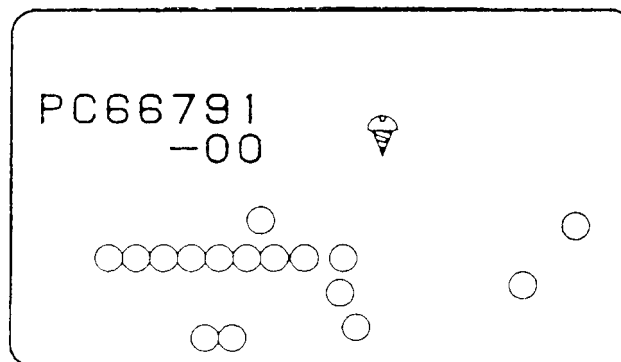

Parts List for CBM-262

SA, Connect PCB 2

Sheet No. 1/1

Rev. No. 1


Item No.	Part No.	Part Name	Type	Q'ty	Manufacturer	Location
1	PC66791-0	SA,Connect PCB 2		1		
2	C6198-713	Connector	13FE-BT-VK-N	1	JST	CN15
3	C6196-804	Connector	53047-0410	1	Molex	CN16
4	C6196-806	Connector	53047-0610	1	Molex	CN17
5	C6198-502	Connector	S2B-PH-K-S	1	JST	CN19
6	C5270-053	Cap.Chip	B,±10%,50V,0.01μF	6	Murata	C301~304,306,307
7	C4922-181	Res.Chip	1/10W,±5%,180Ω	1	Matsushita	R301
8	C4922-000	Res.Chip	1/10W,0Ω(Jumper)	3	Matsushita	R308,R302,JP301

Drawing No.1

Parts List & Location for General Assembly

Revision Up List		
Sheet No.	Rev.No.	Date
1/1	1	Jun.18.1996

Drawing No.1 General Assembly

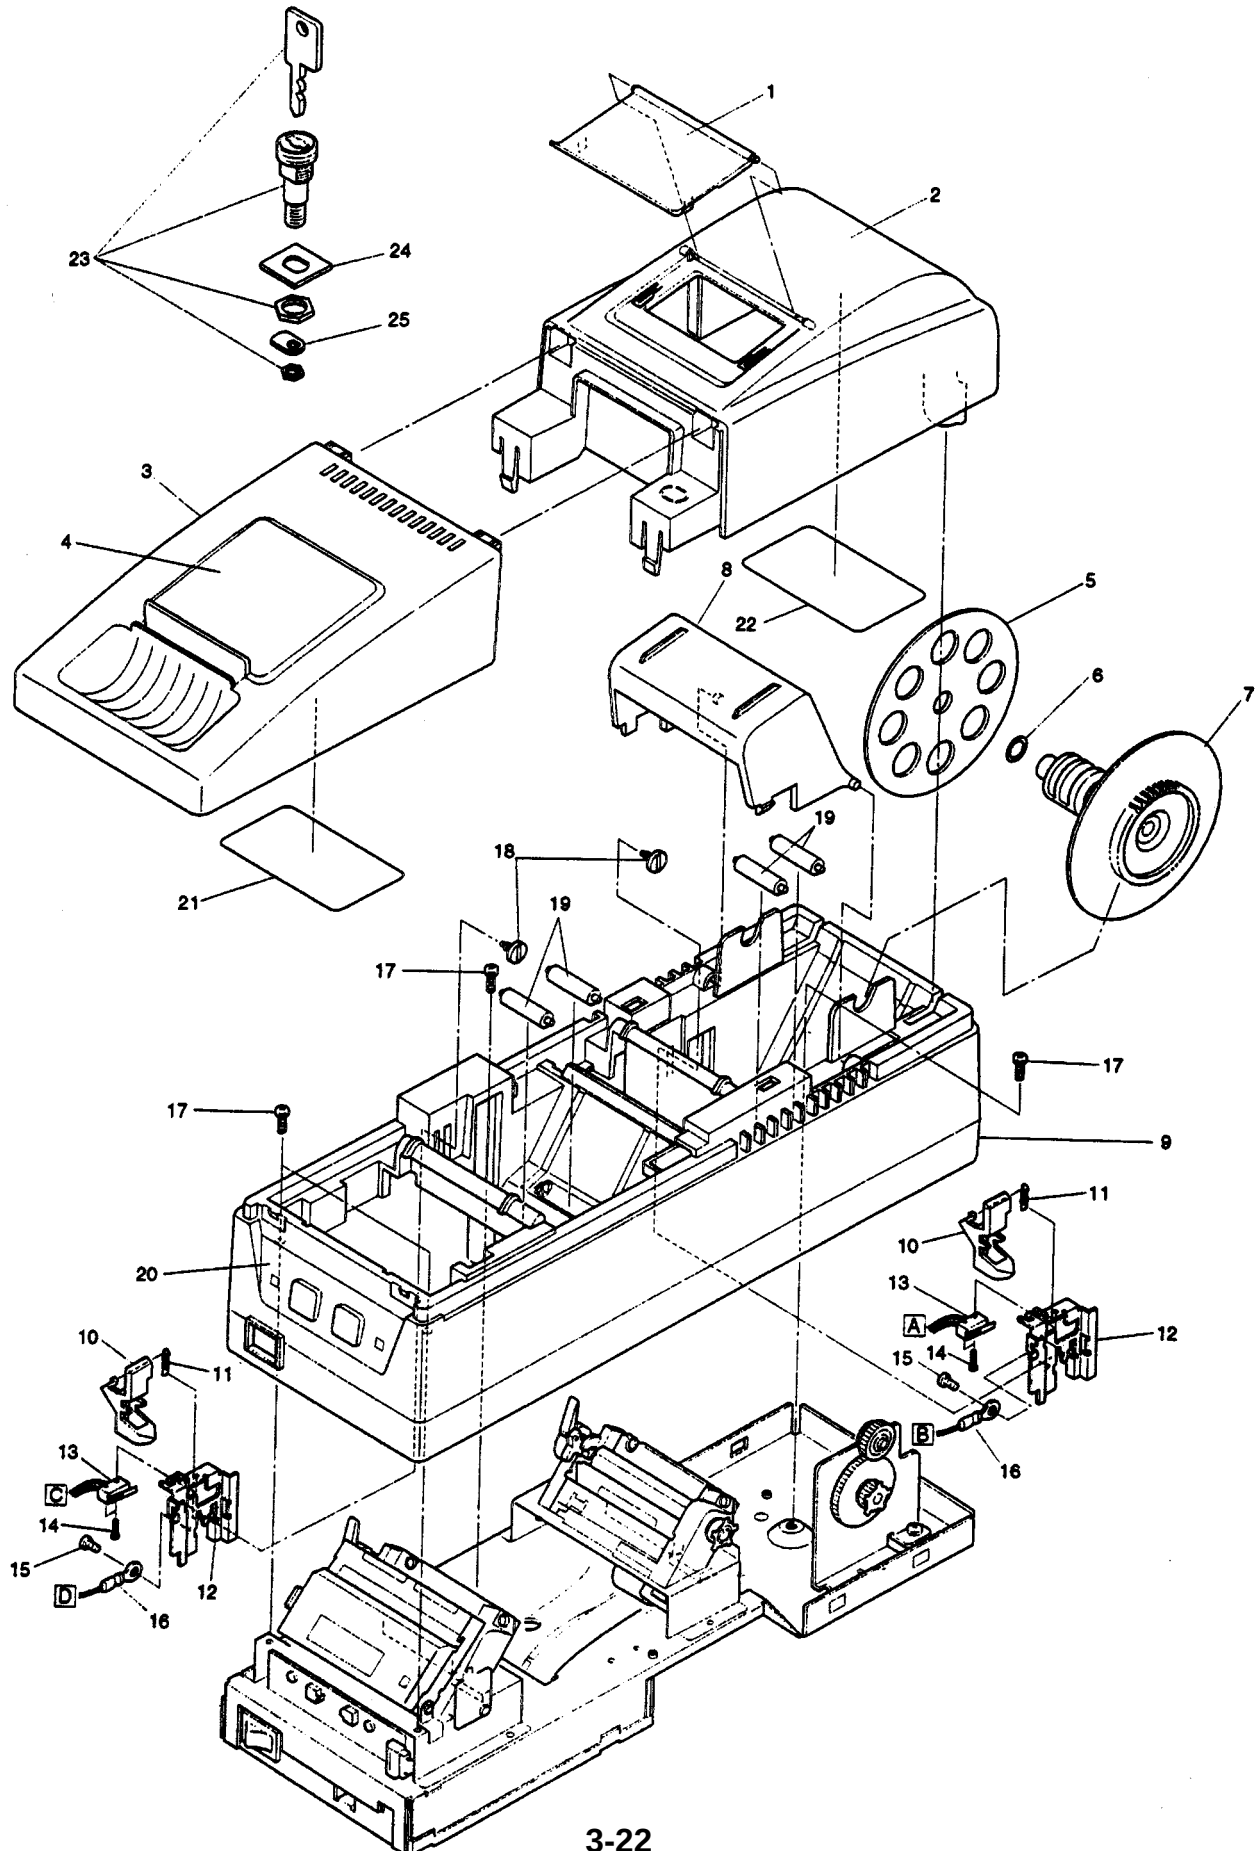

Parts List for CBM-262

General Assembly

Drawing No.1

Sheet No. 1/1
Rev. No. 1


Location	Part No.	Part Name	Q'ty/Unit	Remark
1-1	PC56204-0	Cover,Window	1	
-2	PC56203-0	Cover J	1	
-3	PB56202-0	Cover R	1	
-4	PC54104-0	Plate,Magnet	1	
-5	T5429-02	Spool Partner	1	
-6	PC29901-0	O Ring,P8	1	
-7	PC24202-0	Spool	1	
-8	PC56205-0	Plate,Writing	1	
-9	PC56201-0	Case L	1	
-10	T6816-01	Lever End Switch	2	
-11	PC23602-0	Spring,Coil,NE	2	
-12	PC24102-0	Holder,Switch,NE	2	
-13	PC68700-0	SA,Paper Near End Sensor 1	2	
-14	E00120-08	Screw,PH,M2×8	4	
-15	E00130-04	Screw,PH,M3×4	2	
-16	PC67790-0	SA,Earth Wire 1	2	
-17	E11130-06	Screw,PHT(ST),M3×6	4	
-18	PC22003-0	Screw,Switch,NE	2	
-19	T6115-01	Roll Pressure	4	
-20	PC54108-0	Sheet,Ope-Pane	1	
-21	PC99906-0	Label,Paper Set,R	1	
-22	PC99907-0	Label,Paper Set,J	1	
-23	PC59902-0	Key,Cover	1 set	Factory Option
-24	PC54107-0	Plate,Key	1	Factory Option
-25	PC54106-0	Lever,Key	1	Factory Option

Drawing No.2

Parts List & Location for Mechanism Unit

Revision Up List		
Sheet No.	Rev.No.	Date
1/1	1	Jun.18.1996

Drawing No.2 Mechanism Unit

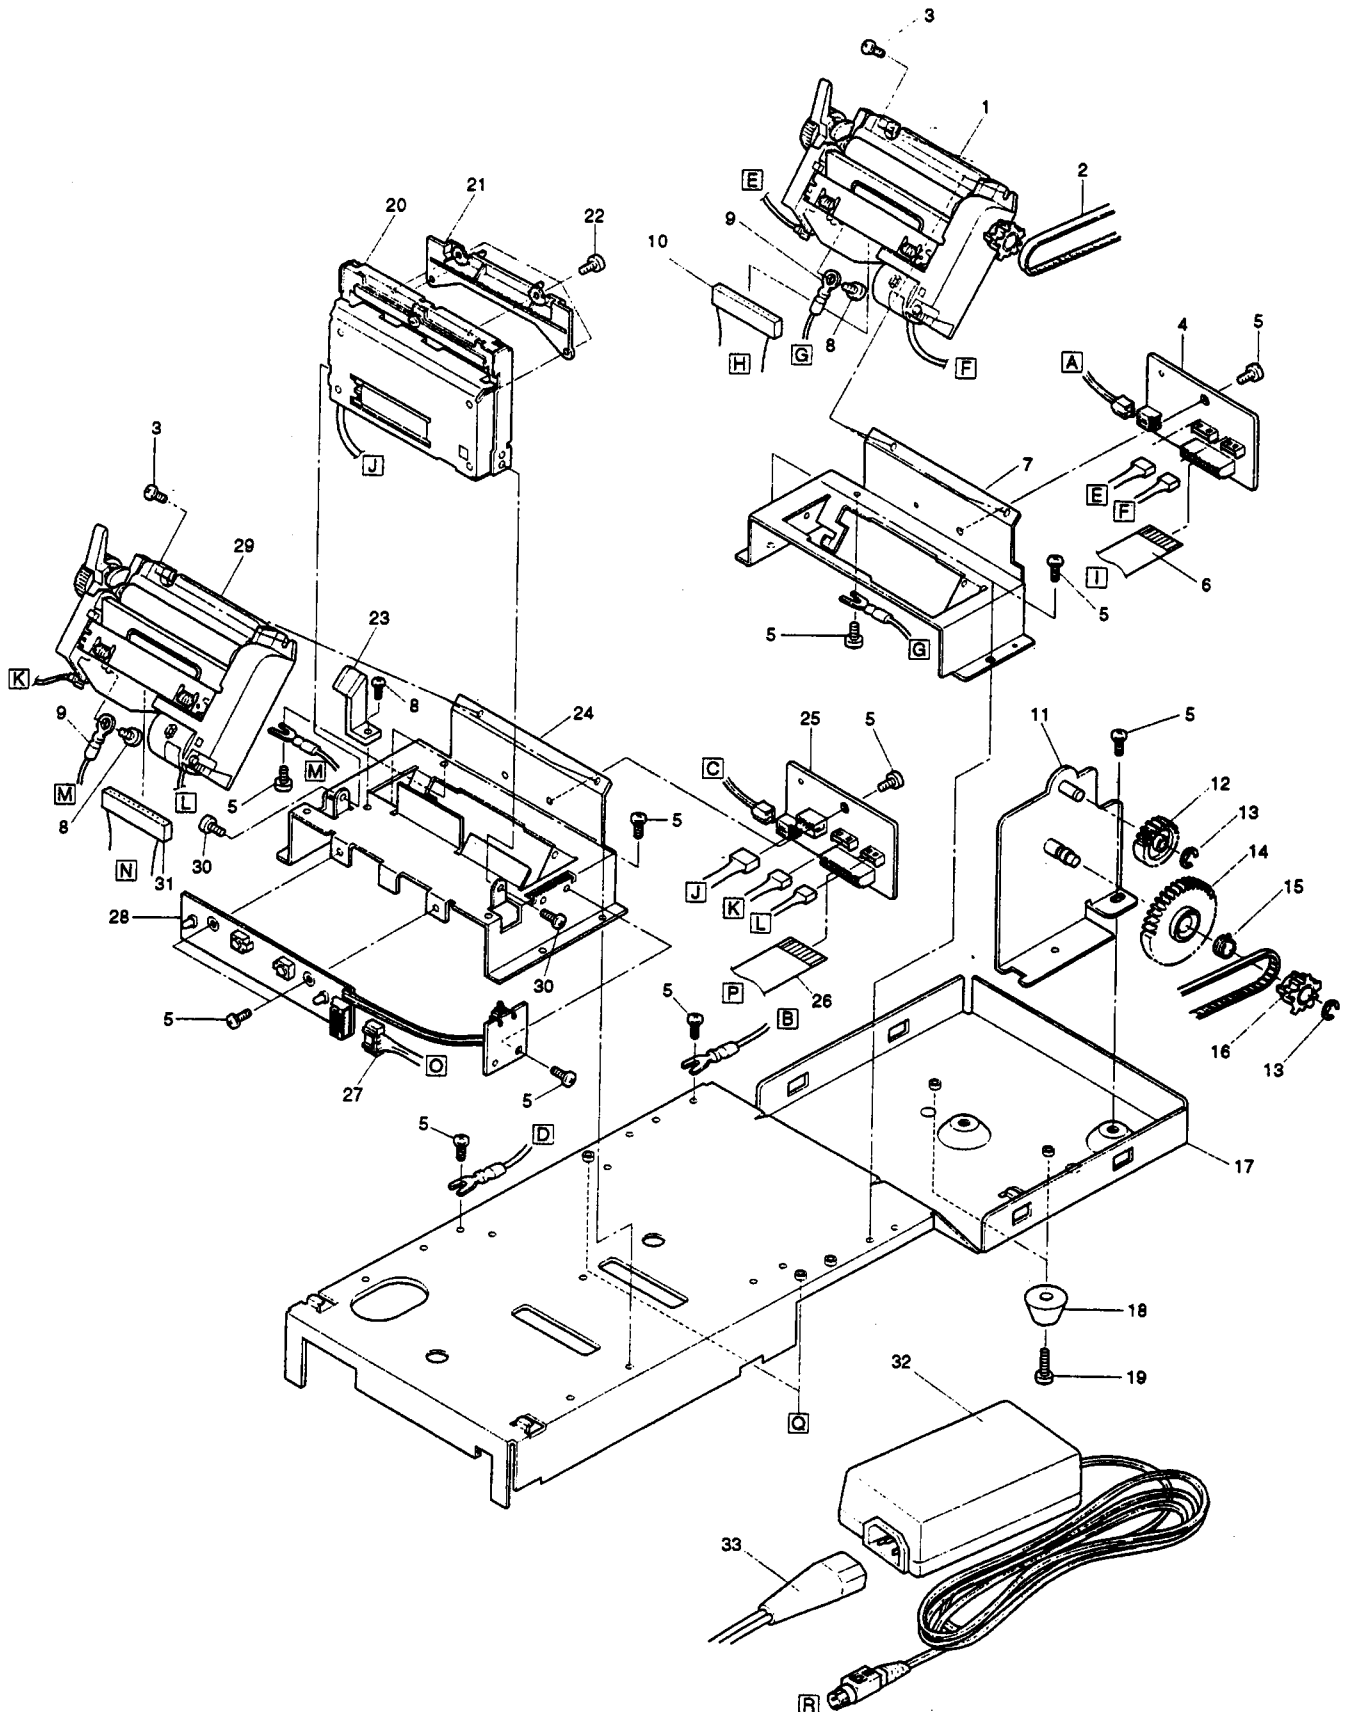

Parts List for CBM-262

Mechanism Unit

Drawing No.2

Sheet No. 1/1
Rev. No. 1

Location	Part No.	Part Name	Q'ty/Unit	Remark
2-1	PB99802-0	Unit,Printer(LT-283 for Journal)	1	PB12-CBWXX
-2	PC26901-0	Belt,Timing,Winder	1	
-3	E00130-04	Screw,PH,M3×4	4	for RS-232C I/F
-4	PC66791-0	SA,Connect PCB 2	1	
-5	E11130-06	Screw,PHT(ST),M3×6	14	
-6	PC67793-0	SA,Connect Cable 2	1	
-7	PC44103-0	Bracket J	1	
-8	E11126-05	Screw,PHT(ST),M2.6×5	3	
-9	PC67791-0	SA,Earth Wire 2	2	
-10	PC67741-0	SA,Head Cable 2	1	
-11	PC24702-0	SA,Winder Plate	1	
-12	PC20201-0	Gear,Spool	1	
-13	E60330-00	E-Ring,3	2	
-14	PC20202-0	Gear,Spool Idle	1	
-15	PC23601-0	Spring,Spool	1	
-16	NE20205-1	Pulley,Winder	1	
-17	PC44101-0	Plate,Main	1	
-18	PC59901-0	Leg	2	
-19	E11130-08	Screw,PHT(ST),M3×8	2	
-20	PC29801-0	Auto Cutter(ACS-120)	1	
-21	PC24201-0	Guide,Paper,Auto Cutter	1	
-22	E11120-04	Screw,PHT(ST),M2×4	4	
-23	PC44901-0	Lever,Lock,Cutter(60-0166)	1	
-24	PC44102-0	Bracket R	1	
-25	PC66790-0	SA,Connect PCB 1	1	
-26	PC67792-0	SA,Connect Cable 1	1	
-27	PC67730-0	SA,Ope-Pane Cable 1	1	
-28	PC66730-0	SA,Ope-Pane PCB 1	1	
-29	PB99801-0	Unit,Printer(LT-283 for Receipt)	1	PB12-CBXXX
-30	E00123-05	Screw,PH,M2.3×5	2	
-31	PC67740-0	SA,Head Cable 1	1	
-32	PC69920-0	Unit,AC Adapter(Jap)	1	
-33	C6005-100 (C6006-100)	Cord Set(Jap.) Black Cord Set(Jap.) Black	1	


Drawing No.3

Parts List & Location for Electrical Component Unit


Revision Up List		
Sheet No.	Rev.No.	Date
1/1	1	Jun.18.1996

Drawing No.3 Electrical Component Unit

<RS-232C I/F>

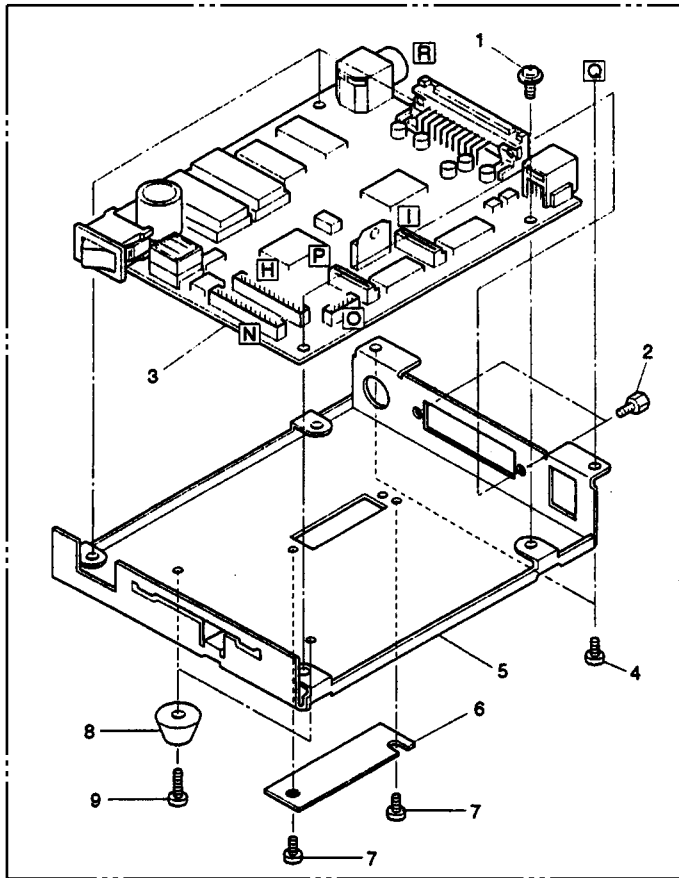

<Centronics I/F>

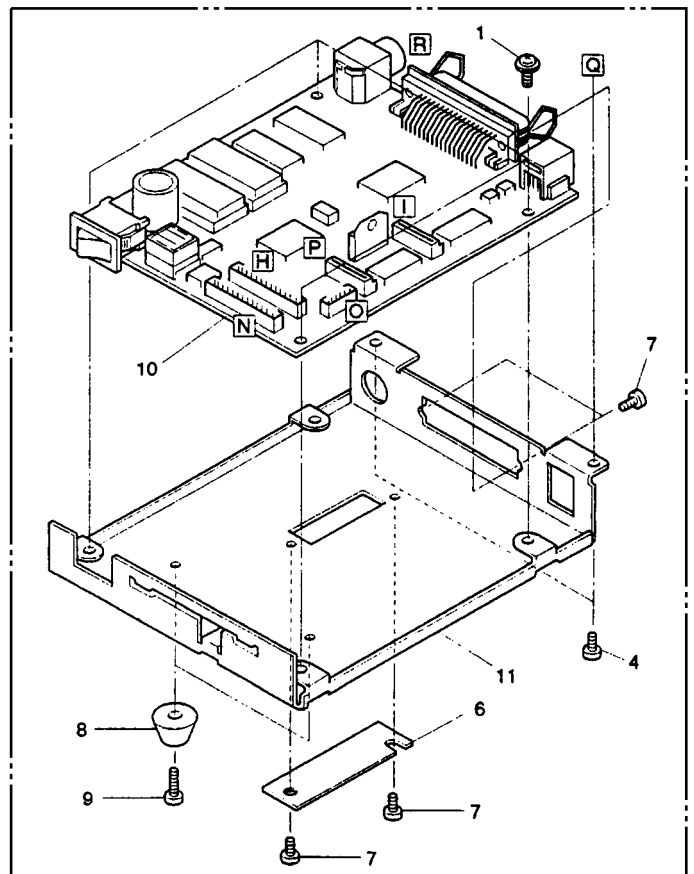

Parts List for CBM-262

Electrical Component Unit

Drawing No.3

Sheet No. 1/1

Rev. No. 1

Location	Part No.	Part Name	Q'ty/Unit	Remark
3-1	E11630-06	Screw,TP(ST),M3×6	4	
-2	PC69900-0	Screw,I/F(mm)	2	for RS-232C I/F
-3	PC66804-0	Unit,Main PCB(with ROM)	1	for RS-232C I/F,Japan
-3	PC66806-0	Unit,Main PCB(with ROM)	1	for RS-232C I/F,USA/Europe
-4	E11130-06	Screw,PHT(ST),M3×6	2	
-5	PC54101-0	Plate,Bottom,Serial	1	for RS-232C I/F
-6	PC54103-0	Cover,DIP Switch	1	
-7	E00130-04	Screw,PH,M3×4	2	for RS-232C I/F
-7	E00130-04	Screw,PH,M3×4	4	for Centronics I/F
-8	PC59901-0	Leg	2	
-9	E11130-08	Screw,PHT(ST),M3×8	2	
-10	PC66805-0	Unit,Main PCB(with ROM)	1	for Centronics I/F,Japan
-10	PC66807-0	Unit,Main PCB(with ROM)	1	for Centronics I/F,USA/Europe
-11	PC54102-0	Plate,Bottom,Parallel	1	for Centronics I/F

Recommended Spare Parts List

Revision Up List		
Sheet No.	Rev.No.	Date
1/1	1	Jun.18.1996

Parts List for CBM-262

Recommended Spare Parts List

Sheet No. 1/1

Rev. No. 1

Item No.	Location	Part No.	Part Name	Q'ty/ Unit	Maint.Class		Remark
					Worn	Casual	
1	1-6	PC29901-0	O Ring,P8	1	○		
2	1-13	PC68700-0	SA,Paper Near End Sensor 1	2		○	
3	2-1	PB99802-0	Unit,Printer(LT-283 for Journal)	1		○	PB12-CBWXX
4	2-2	PC26901-0	Belt,Timing,Winder	1	○		
5	2-4	PC66791-0	SA,Connect PCB 2	1		○	
6	2-6	PC67793-0	SA,Connect Cable 2	1		○	
7	2-10	PC67741-0	SA,Head Cable 2	1		○	
8	2-14	PC20202-0	Gear,Spool Idle	1	○		
9	2-15	PC23601-0	Spring,Spool	1	○		
10	2-16	NE20205-1	Pulley,Winder	1	○		
11	2-20	PC29801-0	Auto Cutter(ACS-120)	1		○	
12	2-25	PC66790-0	SA,Connect PCB 1	1		○	
13	2-26	PC67792-0	SA,Connect Cable 1	1		○	
14	2-27	PC67730-0	SA,Ope-Pane Cable 1	1		○	
15	2-28	PC66730-0	SA,Ope-Pane PCB 1	1		○	
16	2-29	PB99801-0	Unit,Printer(LT-283 for Receipt)	1		○	PB12-CBXXX
17	2-31	PC67740-0	SA,Head Cable 1	1		○	
18	2-32	PC69920-0	Unit,AC Adapter(Jap)	1		○	
19	2-33	C6005-100	Cord Set(Jap.)Black	1		○	
20	3-3	PC66804-0	Unit,Main PCB(with ROM)	1		○	for RS-232C I/F,Japan
21	3-3	PC66806-0	Unit,Main PCB(with ROM)	1		○	for RS-232C I/F,USA/Europe
22	3-10	PC66805-0	Unit,Main PCB(with ROM)	1		○	for Centro I/F,Japan
23	3-10	PC66807-0	Unit,Main PCB(with ROM)	1		○	for Centro I/F,USA/Europe