



Use touch to engage directly with customers


The DSD range has various touch options to enhance the user experience. Touch technologies including IR, Optical and PCT can be built into DSD displays to suit budget performance and, equally, the most demanding needs.

All touch options are integrated natively into the displays and feature:

- + Higher degree of accuracy
- + No unreliable overlays
- + Control to the viewable screen edge
- + No alignment and fitment issue
- + Increased reliability
- + Scratch proof to ensure touch will still operate with scratches on glass
- + Optional glass types for anti-glare and standard protection glass

The DSD range of touch screens also include models the support Windows 7, 8, Android and Linux.

TOUCH
DISPLAY

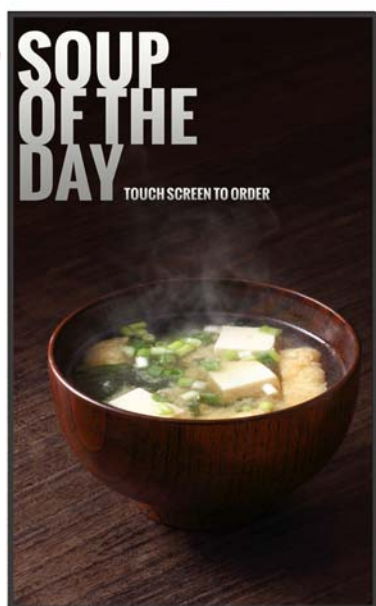

TOUCH
DISPLAY



DSD:	DSD42-HE-T
Type	E-LED Panel
Size	42"
Dimension	1004 x 599 x 69.1 mm
Slim Bezel	33 mm
Weight	25.1 kg
Display Orientation	Portrait / Landscape
Mounting Options	Wall
Mounting Type	VESA FDMI : 400x300
Resolution	1920x1080
Pixel Pitch	0.4845x0.4845
Brightness	500 nits
Viewing Angle	178/178
Contrast Ratio	4000:1
Response Time (Average)	8 ms
Features	+ Fanless + Thermal Alarm & Protection + RS232 Remote Control
I/O Port	+ AC inlet x1 / AC outlet x1 + HDMI x2 + VGA x2 + RS231 in x1 / RS232 out x1 + Audio in x2 / Audio out x1 + Speaker line out R/L
AC Input / Output	+ AC Input : 100~240VAC; + AC Output: 100~240VAC
Power Consumption (Max.)	110W
Touch Screen	2 point, IR Touch USB interface
Tempered Glass	AG+AF Tempered, 3 mm
Temperature	+ Operating: 0° to 40° + Storage: -20° to 60°
Humidity	10~80% R.H. max

DSD:	DSD55-HE-T
Type	E-LED Panel
Size	55"
Dimension	1286 x 755 x 67.2
Slim Bezel	34.8 mm
Weight	40 kg
Display Orientation	Portrait / Landscape
Mounting Options	Wall
Mounting Type	VESA FDMI : 500x400 / 300x400
Resolution	1920x1080
Pixel Pitch	0.21x0.63
Brightness	450 nits
Viewing Angle	178/178
Contrast Ratio	4000:1
Response Time (Average)	6.5 ms
Features	+ Fanless + Thermal Alarm & Protection + RS232 Remote Control
I/O Port	+ AC inlet x1 / AC outlet x1 + HDMI x2 + VGA x2 + RS231 in x1 / RS232 out x1 + Audio in x2 / Audio out x1 + Speaker line out R/L
AC Input / Output	+ AC Input : 100~240VAC; + AC Output: 100~240VAC
Power Consumption (Max.)	120W
Touch Screen	2 points, IR touch USB Interface
Tempered Glass	AG + AF Tempered, 4 mm
Temperature	+ Operating: 0° to 40° + Storage: -20° to 60°
Humidity	10~80% R.H. max

TOUCH
DISPLAY



Pro DSD:	DSD55-HE2-T
Type	E-LED Panel
Size	55"
Dimension	1286 x 755 x 67.2 mm
Slim Bezel	34.8 mm
Weight	40 kg
Display Orientation	Portrait / Landscape
Mounting Options	Wall
Mounting Type	VESA FDMI : 500x400 / 300x400
Resolution	1920x1080
Pixel Pitch	0.21x0.63
Brightness	700 nits
Viewing Angle	178/178
Contrast Ratio	4000:1
Response Time (Average)	6.5 ms
Features	+ Fanless + Thermal Alarm & Protection + RS232 Remote Control
I/O Port	+ AC inlet x1 / AC outlet x1 + HDMI x2 + VGA x2 + RS231 in x1 / RS232 out x1 + Audio in x2 / Audio out x1 + Speaker line out R/L
AC Input / Output	+ AC Input : 100~240VAC; + AC Output: 100~240VAC
Power Consumption (Max.)	120W
Touch Screen	2 points, IR touch USB interface
Tempered Glass	AG+AF Tempered, 4 mm
Temperature	+ Operating: 0° to 40° + Storage: -20° to 60°
Humidity	10~80% R.H. max

Authorised Australian Distributor:
Goodson Imports Pty Ltd
142 Wicks Road, Macquarie Park NSW 2113
Offices in all main States and New Zealand
Ph: 02-8875 4544 Fax 02-8875 4588
www.goodson.com.au

