

CL-S400DT

Recommended Spare Parts List

Revision Up List		
Sheet No.	Rev. No.	Date
1/1	0	July. 12, 2011

PARTS LIST for CL-S400DT

TITLE: Recommended Spare Parts List

Sheet No. 1/1

Rev. No. 0

Item No.	Location	Part No.	Part Name	Q'ty/ Unit	Maint. Class		Remarks	@
					Worn	Casual		
1	2-6	SA2 Platen	PPK90002-0	1	○			
2	3-4-1	SA Power Supply (100V)	PWT20004-0	1		○	For CSA	
3	3-4-2	SA Power Supply (220V)	PWT20003-0	1		○	For CSE/China	
4	3-7-1	SA Main PCB	PPS00001-0	1		○	For CSA/CSE	
5	3-7-2	SA Main PCB (CHN)	PPS00024-0	1		○	For China	
6	4-15-1	SA2 Head	PPM80001-0	1	○			
7	4-15-2	SA2 Head (DP)	PPM80002-0	1	○			
8	4-16	SA Head Cable	PPS30001-0	1		○		
9	5-5	SA Adjust Sensor U	PPS90001-0	1		○		
10	6-5	SA Adjust Sensor L	PPS90002-0	1		○		
11	6-13	SA Head Up SW	PPS90004-0	1	○			
12	7-9	Unit, Motor	TZ25801-1	1	○			
13	8-5	SA FFC LCD	PPS40001-0	1		○		
14	8-6	SA LCD PCB	PPS00002-0	1		○		
15								
16								
17								
18								
19								
20								


CL-S400DT

Drawing No. 1

Parts List & Location for General Assembly

Revision Up List		
Sheet No.	Rev. No.	Date
1/1	0	July. 12, 2011

DRAWING NO. 1 General Assembly (Rev. 0)

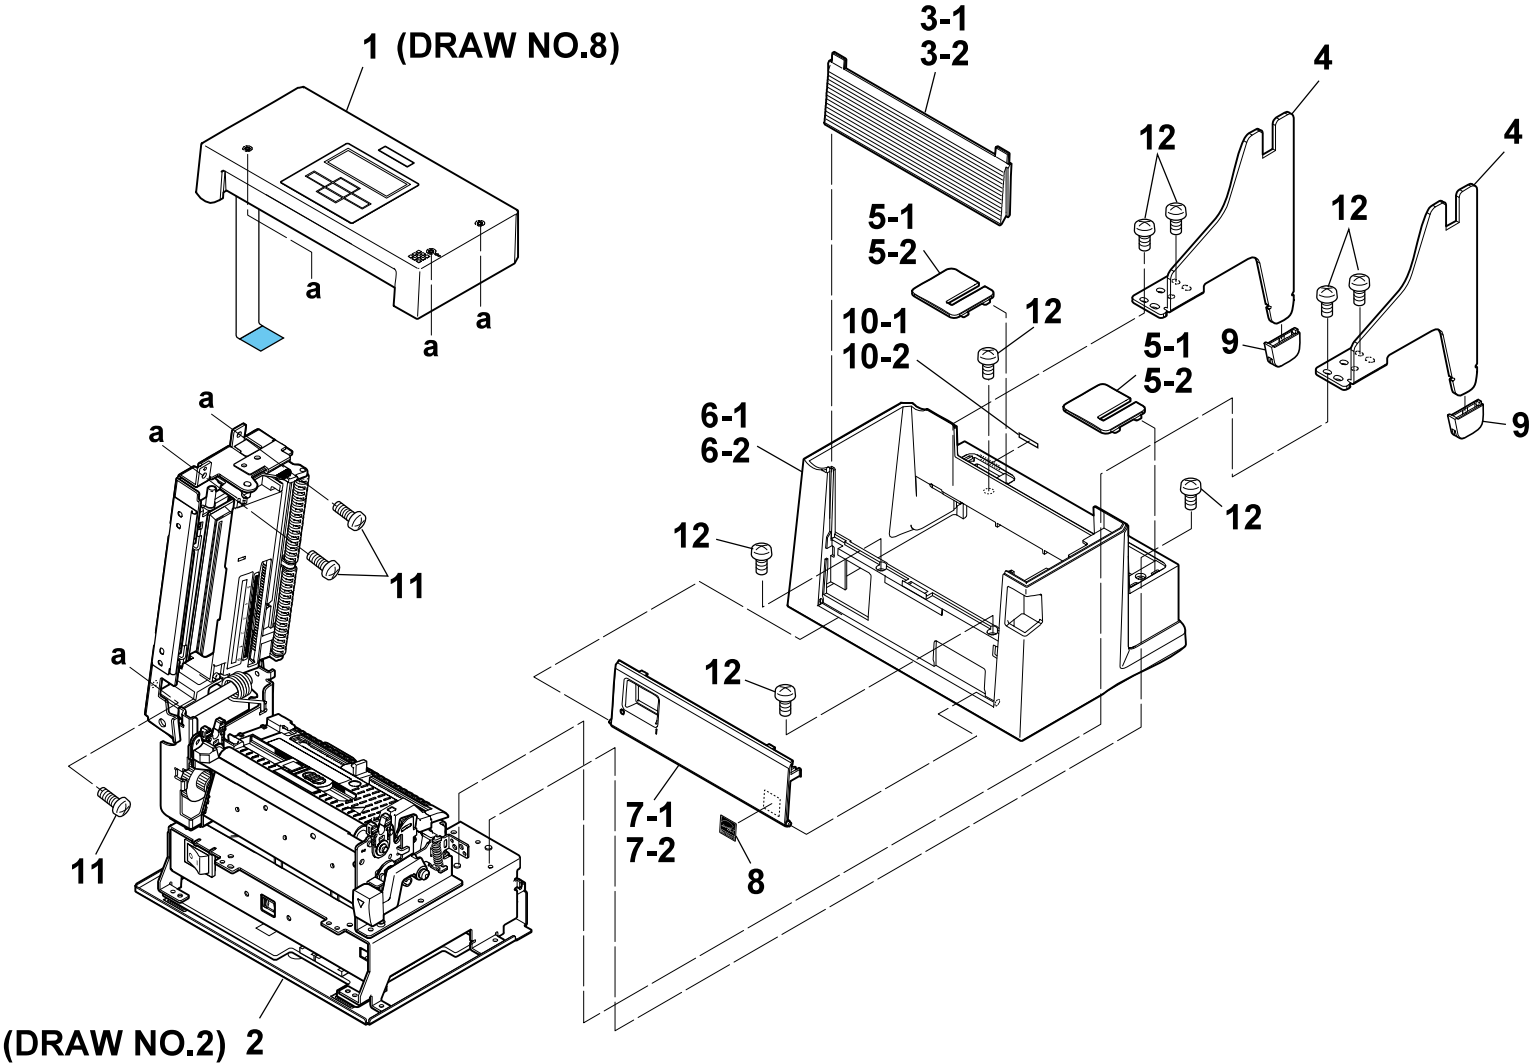

PARTS LIST for CL-S400DT

TITLE: General Assembly

Sheet No. 1/1

Drawing No. 1

Rev. No. 0

Location	Part Name	Part No.	Q'ty/ Unit	Remarks	@
1-1	SA Cover	-	1	(Ref. Drawing No. 8)	
-2	SA Mechanism	-	1	(Ref. Drawing No. 2)	
-3-1	Cover Front BK	PBA00007-0	1	(Black)	
-3-2	Cover Front	PBA00003-0	1	(White)	
-4	Holder Paper 127	PAM30001-0	2		
-5-1	Cap PH BK	PBA10006-0	2	(Black)	
-5-2	Cap PH	PBA10004-0	2	(White)	
-6-1	Case BK	PBA00005-0	1	(Black)	
-6-2	Case	PBA00001-0	1	(White)	
-7-1	Cover SW BK	PBA00008-0	1	(Black)	
-7-2	Cover SW	PBA00004-0	1		
-8	Label Energy Star (BK)	PZX30001-0	1		
-9	Cap Paper Holder	PBA10008-0	2		
-10-1	Label Inlet Volt (100-120)	PRX30001-0	1	For CSA	
-10-2	Label Inlet Volt (200-240)	PRX30002-0	1	For CSE/China	
-11	Screw, PHT(#2), M3.0X8(NI)	E10130-080WF	3		
-12	Screw, BH (N), M3.0X6 (NI)	E00530-060WF	8		


CL-S400DT

Drawing No. 2

Parts List & Location for SA Mechanism

Revision Up List		
Sheet No.	Rev. No.	Date
1/1	0	July. 12, 2011

DRAWING NO. 2 SA Mechanism (Rev. 0)

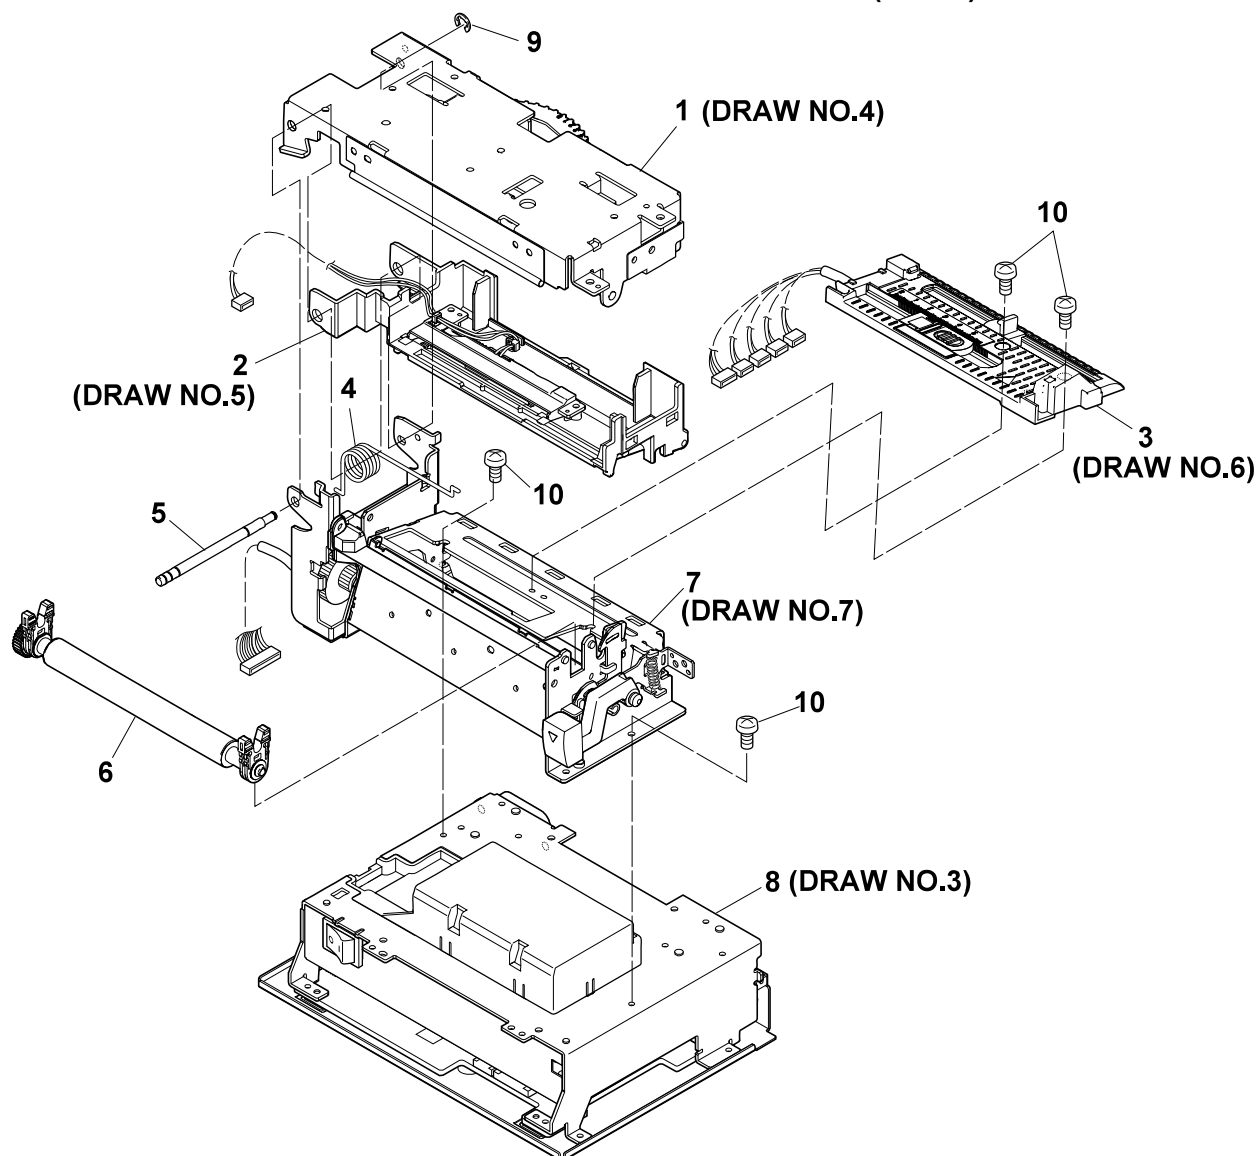

PARTS LIST for CL-S400DT

TITLE: SA Mechanism

Sheet No. 1/1

Drawing No. 2

Rev. No. 0

Location	Part Name	Part No.	Q'ty/ Unit	Remarks	@
2-1	SA2 Cover Frame	-	1	(Ref. Drawing No. 4)	
-2	SA Guide Paper U	-	1	(Ref. Drawing No. 5)	
-3	SA Guide Paper L	-	1	(Ref. Drawing No. 6)	
-4	Spring Pop Up	PJG60003-0	1		
-5	Shaft Hinge Frame	PCG80004-0	1		
-6	SA2 Platen	PPK90002-0	1		
-7	SA2 Main Frame	-	1	(Ref. Drawing No. 7)	
-8	SA2 Base Frame	-	1	(Ref. Drawing No. 3)	
-9	E-Ring, 3.0	E60330-000F	1		
-10	Screw, BH (N), M3.0X6 (NI)	E00530-060WF	4		


CL-S400DT

Drawing No. 3

Parts List & Location for SA2 Base Frame

Revision Up List		
Sheet No.	Rev. No.	Date
1/2	0	July. 12, 2011
2/2	0	July. 12, 2011

DRAWING NO. 3 SA2 Base Frame (Rev. 0)

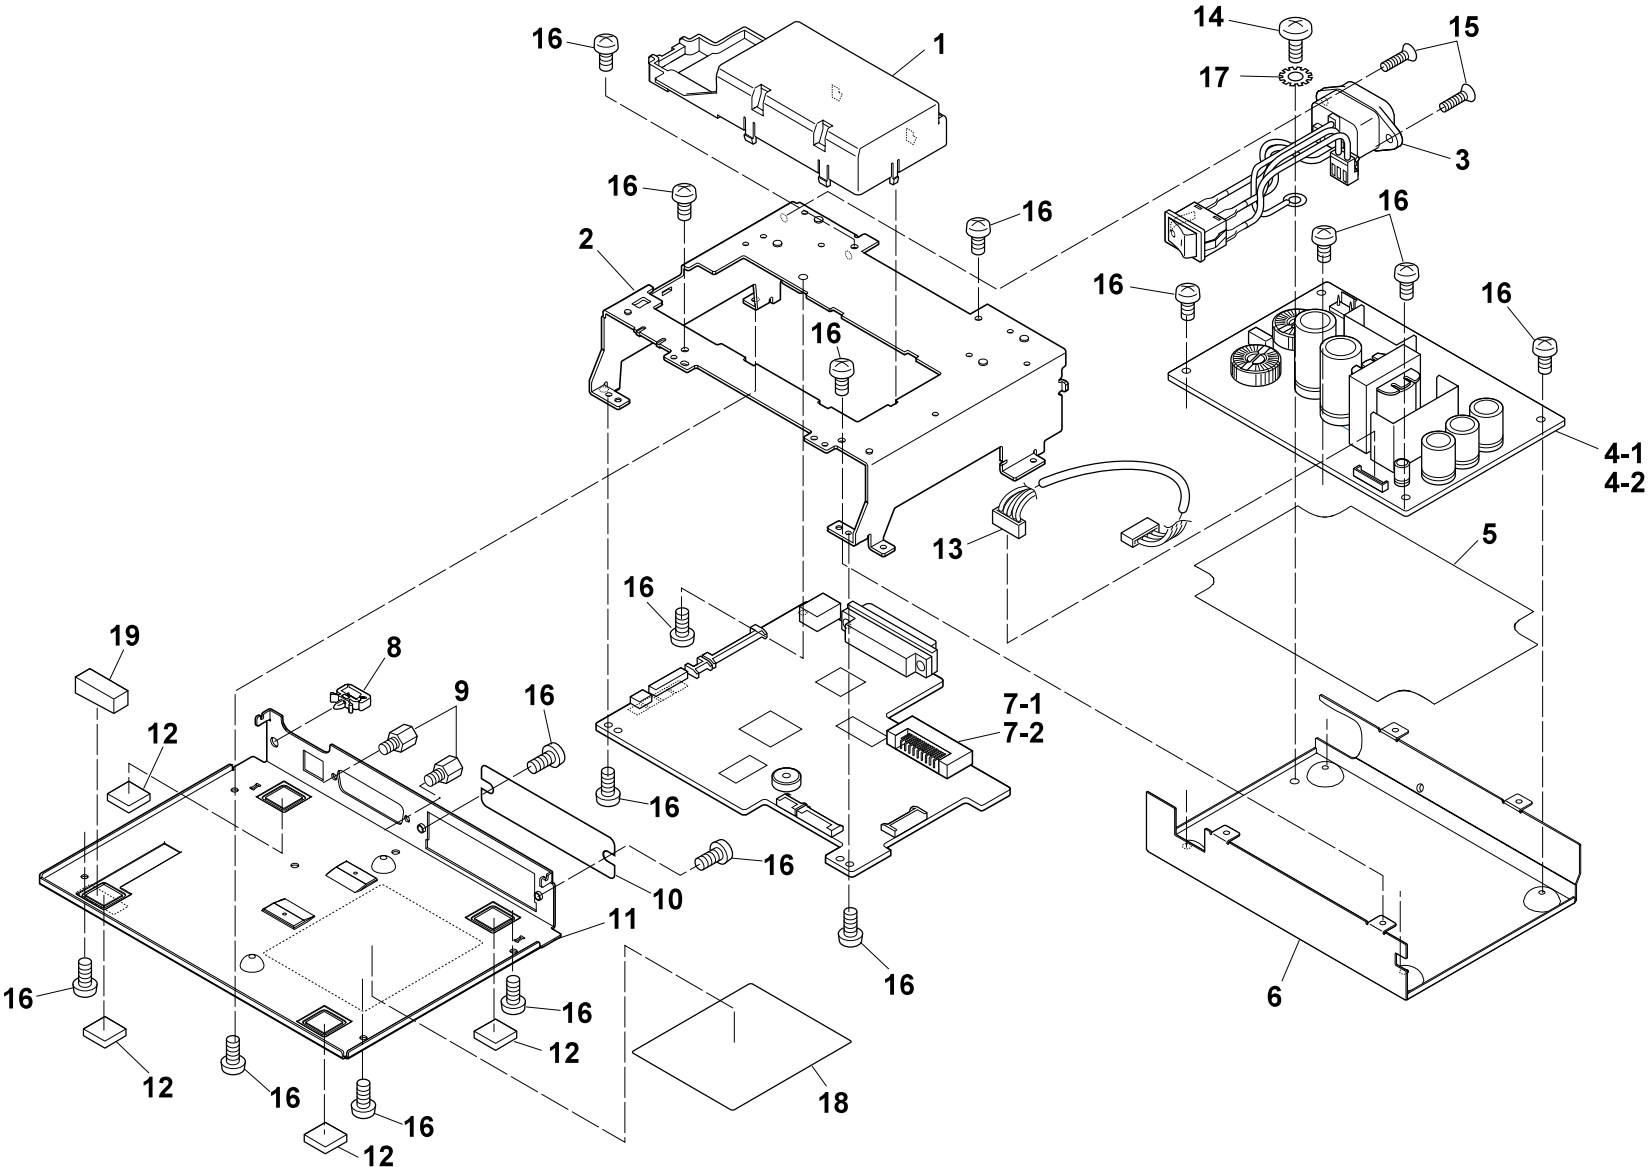

PARTS LIST for CL-S400DT

TITLE: SA2 Base Frame

Sheet No. 1/2

Drawing No. 3

Rev. No. 0

Location	Part Name	Part No.	Q'ty/ Unit	Remarks	@
3-1	Cover Power PCB	PBC80001-0	1		
-2	Frame Base	PAC60005-0	1		
-3	SA Power SW Cable	PPS30003-0	1		
-4-1	SA Power Supply (100V)	PWT20004-0	1	For CSA	
-4-2	SA Power Supply (220V)	PWT20003-0	1	For CSE/China	
-5	Sheet Insulation	PRC00001-0	1		
-6	Frame Power PCB	PAC60006-0	1		
-7-1	SA Main PCB	PPS00001-0	1	For CSA/CSE	
-7-2	SA Main PCB (CHN)	PPS00024-0	1	For China	
-8	LWS-1S (Cable, Clamp)	TZ59901-0	1		
-9	Lock Screw (Inch)	C6390-071#	2		
-10	Plate, I/F Cover	TA54107-1	1		
-11	Frame Bottom	PAC60007-0	1		
-12	Leg	BE54106-0	4		
-13	SA Power Cable	PPS30002-0	1		
-14	Screw, BH (N), M4X5	E00540-050WF	1		
-15	Screw, FH, M3.0X6	E00230-060F	2		
-16	Screw, BH (N), M3.0X6 (NI)	E00530-060WF	17		
-17	Washer, EXT, T (N), 4	E50740-000WF	1		
-18	Label, FCC ECES VCCI-A	TZ99901-0	1	For CSA	

PARTS LIST for CL-S400DT

TITLE: SA2 Base Frame

Sheet No. 2/2

Drawing No. 3

Rev. No. 0

Location	Part Name	Part No.	Q'ty/ Unit	Remarks	@
3-19	EMI Gasket	PWC20001-0	1		

CL-S400DT


Drawing No. 4

Parts List & Location for SA2 Cover Frame

Revision Up List		
Sheet No.	Rev. No.	Date
1/2	0	July. 12, 2011
2/2	0	July. 12, 2011

DRAWING NO. 4 SA2 Cover Frame (Rev. 0)

Apply grease (Floil G-311S)
to the places marked with ★.

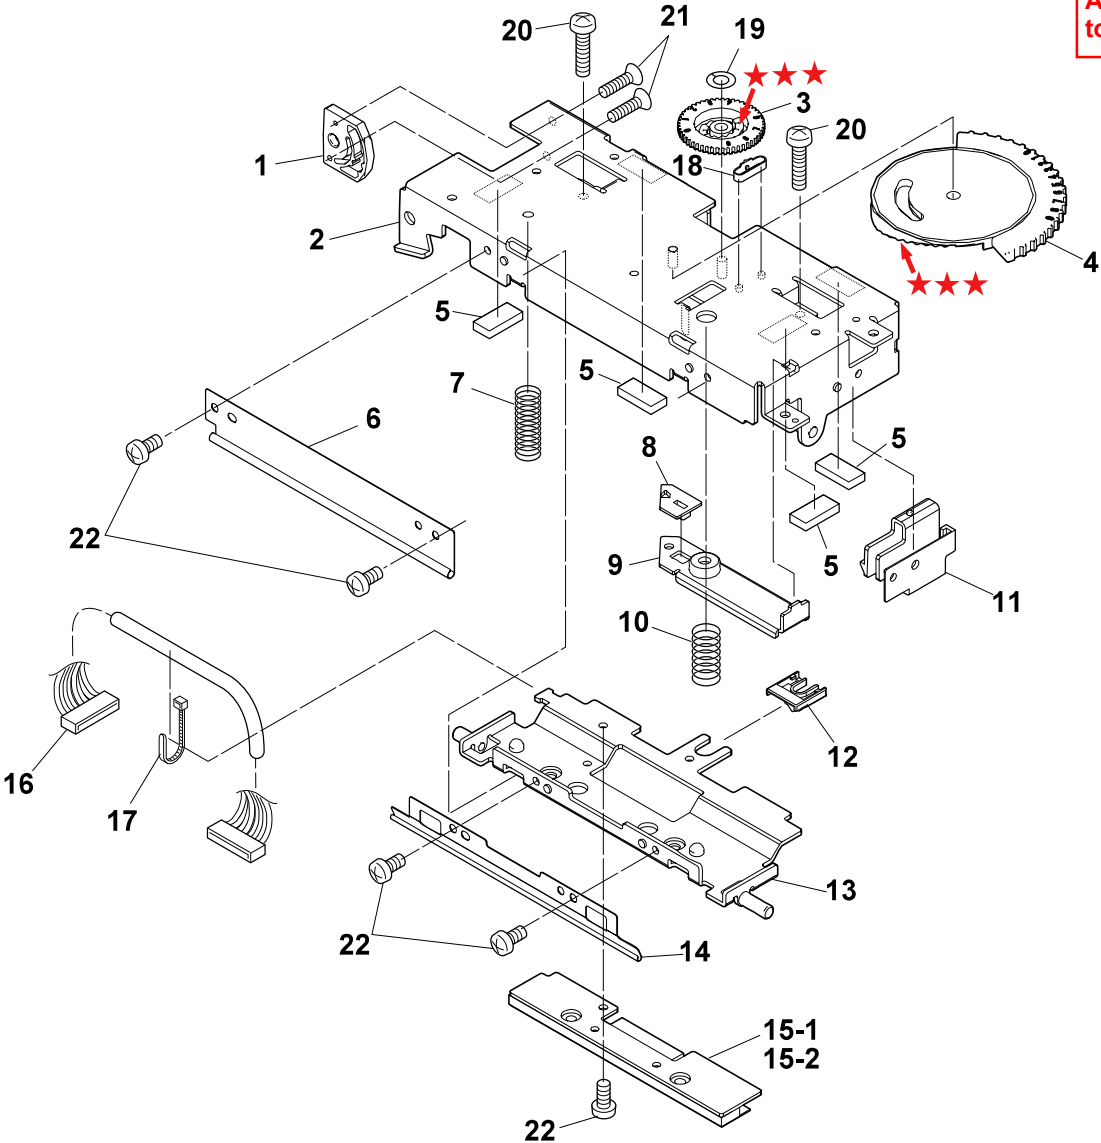

PARTS LIST for CL-S400DT

TITLE: SA2 Cover Frame
Drawing No. 4Sheet No. 1/2
Rev. No. 0

Location	Part Name	Part No.	Q'ty/ Unit	Remarks	@
4-1	Stopper Cover Open	PBA60002-0	1		
-2	SA Cover Frame	PPC60002-0	1		
-3	Cam Adjust Head Angle	PBF50002-0	1		
-4	Cam Adjust Head Spring	PBF50001-0	1		
-5	Leg, Case L F	JM59902-0	4		
-6	Plate Label Protect 2	PAC70003-0	1		
-7	Spring Head L	PJG60001-0	1		
-8	Spacer Adjust Spring	PBH40001-0	1		
-9	Plate Adjust Spring Holder	PAE00003-0	1		
-10	Spring Head R	PJG60002-0	1		
-11	Stopper Guide Paper U	PBA60001-0	1		
-12	Spacer Adjust Head Angle	PBH40002-0	1		
-13	SA Plate Holder Head	PPE00001-0	1		
-14	Plate Label Protect	PAC70002-0	1		
-15-1	SA2 Head	PPM80001-0	1		
-15-2	SA2 Head (DP)	PPM80002-0	1		
-16	SA Head Cable	PPS30001-0	1		
-17	Wire Tie	CS66-00003857	1		
-18	Pawl Adjust Angle Cam	PBA60005-0	1		
-19	Washer, Platen	TZ44116-0	1		


CL-S400DT

Drawing No. 5

Parts List & Location for SA Guide Paper U

Revision Up List		
Sheet No.	Rev. No.	Date
1/1	0	July. 12, 2011

DRAWING NO. 5 SA Guide Paper U (Rev. 0)

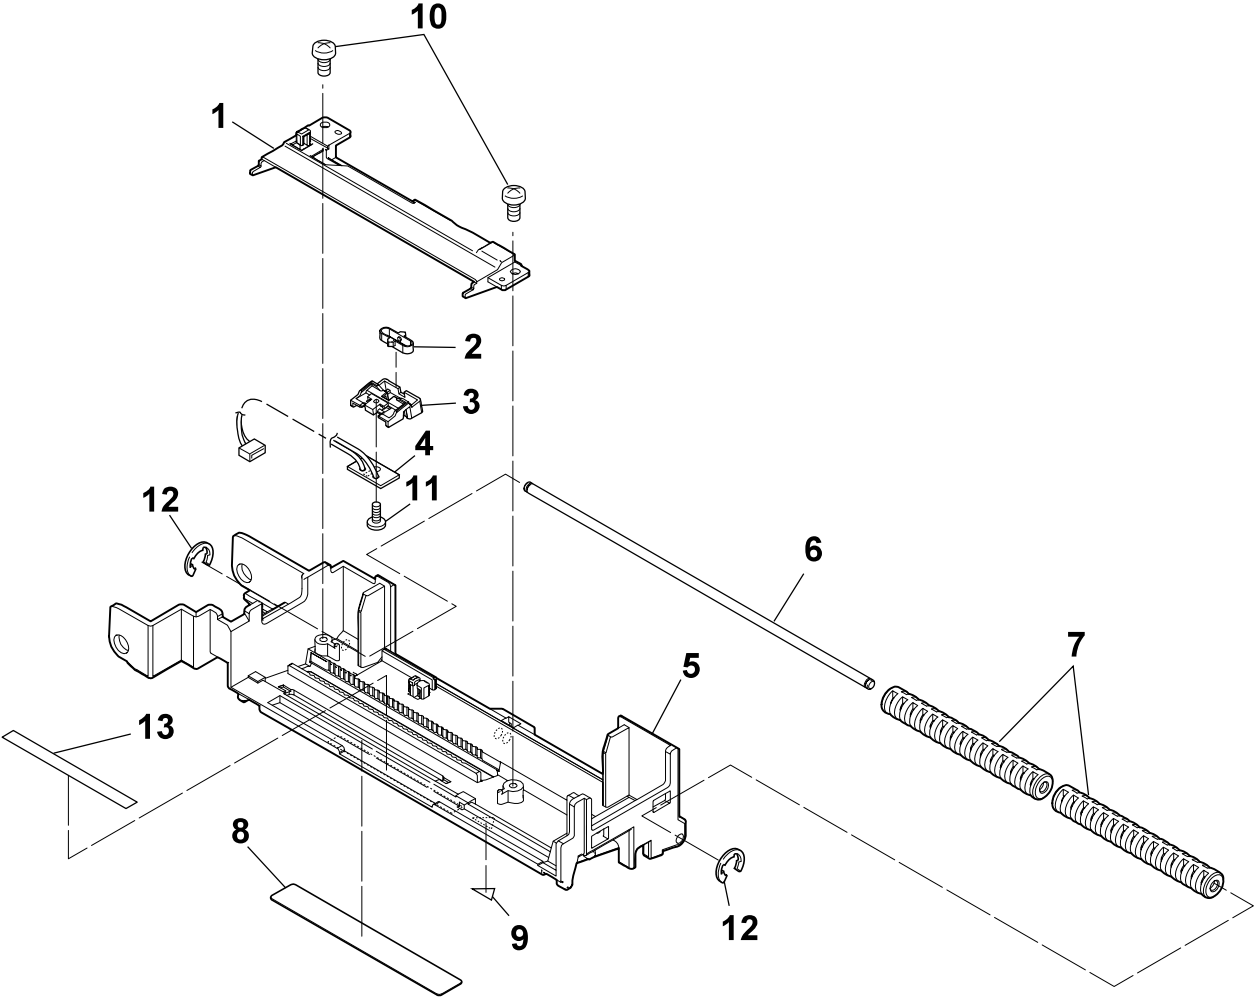

PARTS LIST for CL-S400DT

TITLE:SA Guide Paper U

Sheet No. 1/1

Drawing No. 5

Rev. No. 0

Location	Part Name	Part No.	Q'ty/ Unit	Remarks	@
5-1	Cover Adjust Sensor U	PBC80004-0	1		
-2	Pawl Adjust Sensor U	PBA60003-0	1		
-3	Holder Adjust Sensor U	PBE00002-0	1		
-4	SA Adjust Sensor U	PPS90001-0	1		
-5	Guide Paper U	PBM30002-0	1		
-6	Shaft Roller	PCG80011-0	1		
-7	Roller Guide Paper U	PBM10001-0	2		
-8	Sheet Adjust Sensor U	PRC80002-0	1		
-9	Label, Heat Caution-02	TZ99913-0	1		
-10	Screw, BHT(PT), M2.6X5	E12826-050F	2		
-11	Screw, NO.0 PHT(BT#1), M2.0X3	E11920-030F	1		
-12	E-Ring, 2.0	E60320-000F	2		
-13	Sheet Head Insulation	PRC00002-0	1		


CL-S400DT

Drawing No. 6

Parts List & Location for SA Guide Paper L

Revision Up List		
Sheet No.	Rev. No.	Date
1/2	0	July. 12, 2011
2/2	0	July. 12, 2011

DRAWING NO. 6 SA Guide Paper L (Rev. 0)

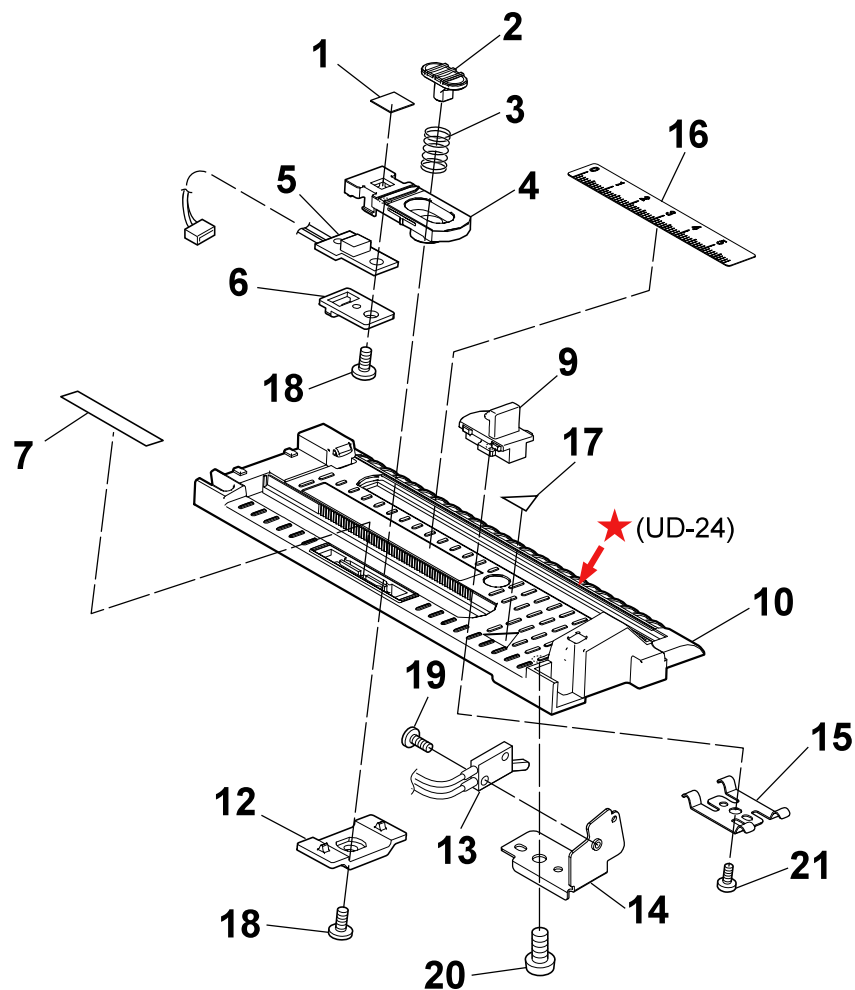

PARTS LIST for CL-S400DT

TITLE: SA Guide Paper L

Sheet No. 1/2

Drawing No. 6

Rev. No. 0

Location	Part Name	Part No.	Q'ty/ Unit	Remarks	@
6-1	Sheet Adjust Sensor L	PRC80001-0	1		
-2	Key Adjust Sensor L	PBA60004-0	1		
-3	Spring Adjust Sensor L	PJG60005-0	1		
-4	Holder Adjust Sensor L	PBE00001-0	1		
-5	SA Adjust Sensor L	PPS90002-0	1		
-6	Holder Adjust Sensor L Cable	PBE00003-0	1		
-7	Sheet Fixed Sensor	PRC80003-0	1		
-8	-	-			
-9	Guide Paper R	PBM30004-0	1		
-10	Guide Paper L	PBM30001-0	1		
-11	-	-			
-12	Lever Adjust Sensor L	PBC90002-0	1		
-13	SA Head Up SW	PPS90004-0	1		
-14	Holder Cover Open SW	PAE00004-0	1		
-15	Spring Leaf Guide Paper R	PAG60001-0	1		
-16	Sheet Adjust Sensor L Scale	PRC80004-0	1		
-17	Label, Edge Caution-02	TZ99914-0	1		
-18	Screw, NO.0, PHT (PT, BK), M2X5	E12820-050F	2		
-19	Screw, NO.0, PHT (BT #3), M1.7X7	E13517-070F	1		
-20	Screw, BHT(PT), M3.0X6	E12830-060F	1		

PARTS LIST for CL-S400DT

TITLE: SA Guide Paper L

Sheet No. 2/2

Drawing No. 6

Rev. No. 0

Location	Part Name	Part No.	Q'ty/ Unit	Remarks	@
6-21	Screw, NO.0 PHT(BT#1), M2.0X3	E11920-030F	1		


CL-S400DT

Drawing No. 7

Parts List & Location for SA2 Main Frame

Revision Up List		
Sheet No.	Rev. No.	Date
1/1	0	July. 12, 2011

DRAWING NO. 7 SA2 Main Frame (Rev. 0)

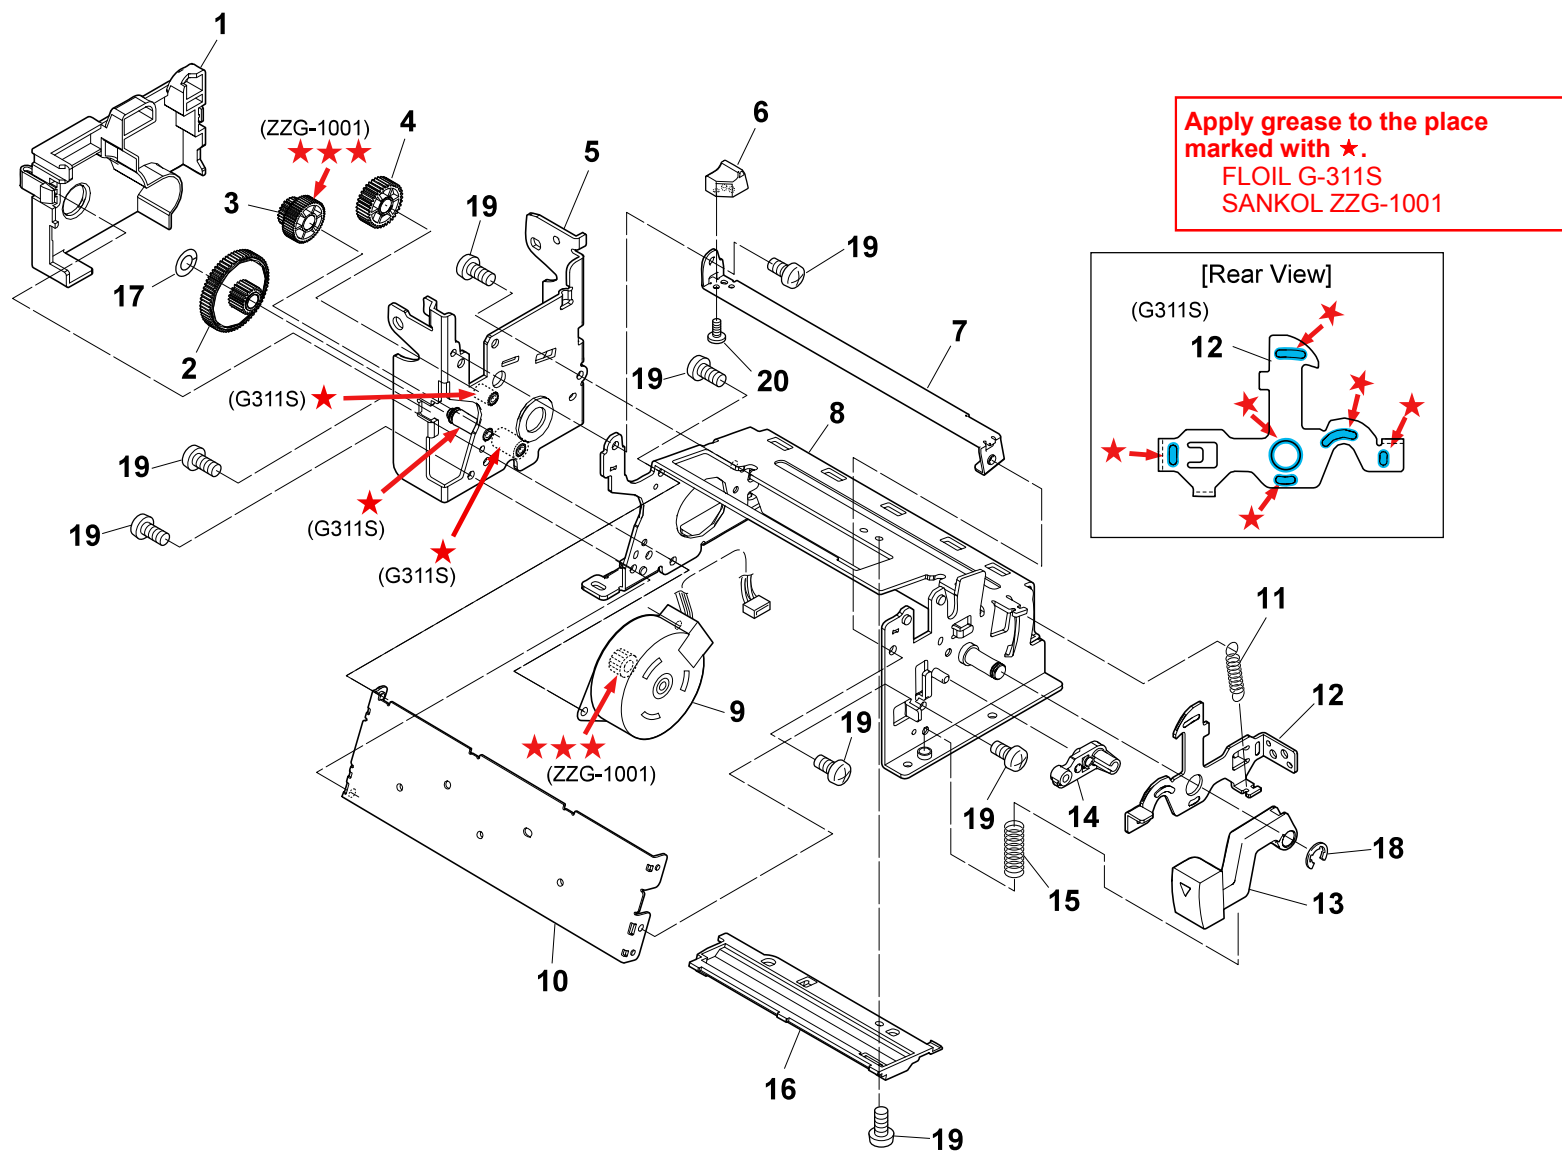

PARTS LIST for CL-S400DT

TITLE: SA2 Main Frame

Sheet No. 1/1

Drawing No. 7

Rev. No. 0

Location	Part Name	Part No.	Q'ty/ Unit	Remarks	@
7-1	Cover Cable	PBC80002-0	1		
-2	Gear Reduction 2	PBF00002-0	1		
-3	Gear Reduction 1	PBF00001-0	1		
-4	Gear Idle	PBF00003-0	1		
-5	SA Hinge Frame	PPC60003-0	1		
-6	Guide Paper F	PBM30003-0	1		
-7	Plate Peel Guide	PAC70001-0	1		
-8	SA Main Frame	PPC60001-0	1		
-9	Unit, Motor	TZ25801-1	1		
-10	Frame Front	PAC60003-0	1		
-11	Spring Cover Lock Lever	PJG60004-0	1		
-12	Lever R Cover Lock	PAC90001-0	1		
-13	Knob Cover Open	PBA10001-0	1		
-14	Lever Support Cover Open	PBC90001-0	1		
-15	Spring Cover Open Knob	PJG60006-0	1		
-16	Cover Adjust Sensor L	PBC80003-0	1		
-17	Washer, Platen	TZ44116-0	1		
-18	E-Ring, 4.0	E60340-000F	1		
-19	Screw, BH (N), M3.0X6 (NI)	E00530-060WF	8		
-20	Screw, NO.0, PHT (PT, BK), M2X5	E12820-050F	1		


CL-S400DT

Drawing No. 8

Parts List & Location for SA Cover

Revision Up List		
Sheet No.	Rev. No.	Date
1/1	0	July. 12, 2011

DRAWING NO. 8 SA Cover (Rev. 0)

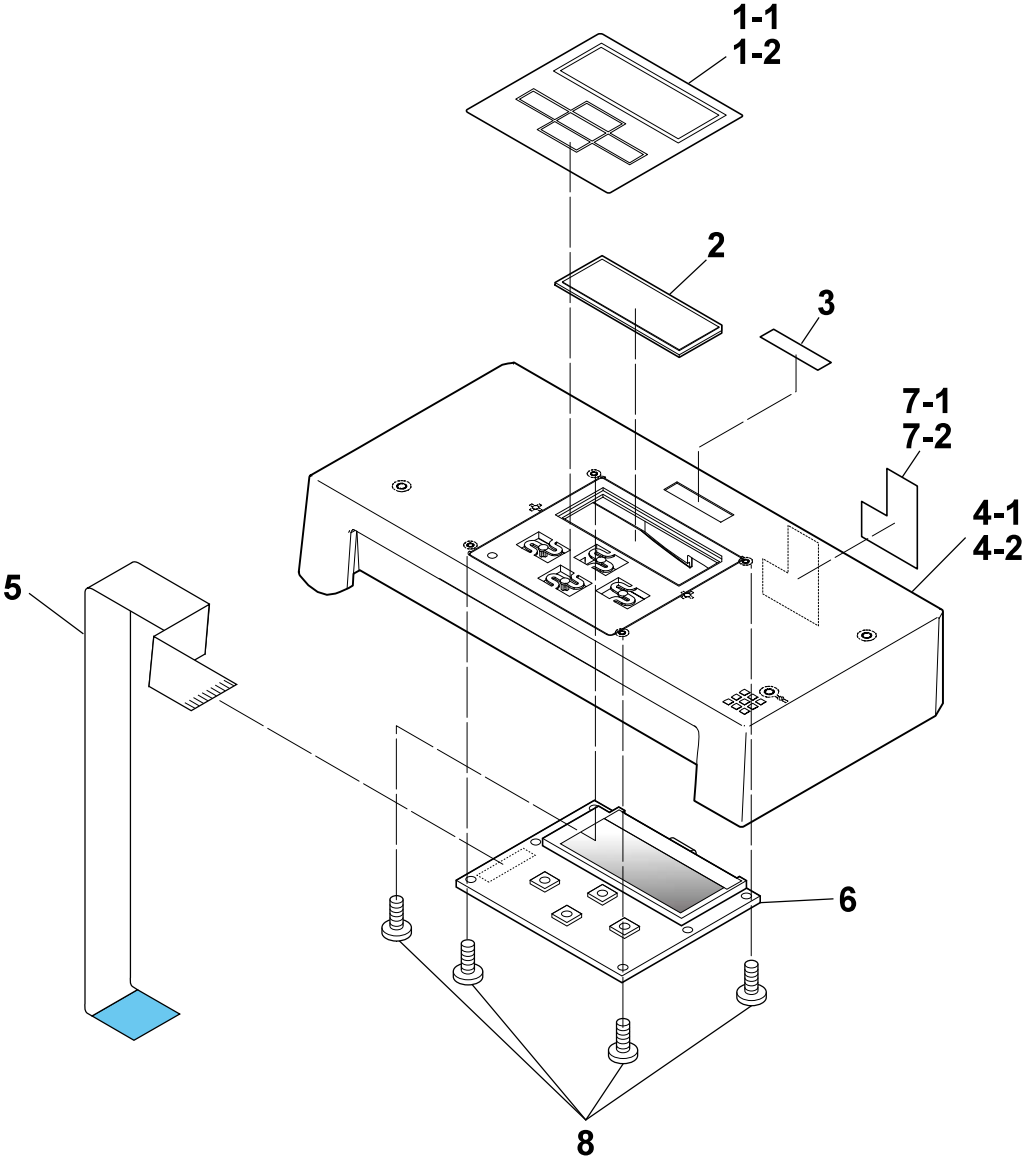

PARTS LIST for CL-S400DT

TITLE: SA Coverr

Sheet No. 1/1

Drawing No. 8

Rev. No. 0

Location	Part Name	Part No.	Q'ty/ Unit	Remarks	@
8-1-1	Sheet Ope-Pane	PRN30001-0	1	For CSA/CSE	
-1-2	Sheet Ope-Pane (CHN)	PRN30004-0	1	For China	
-2	Cover LCD	PBA10002-0	1		
-3	Logo, CITIZEN	TZ54103-0	1		
-4-1	Cover	PBA00002-0	1	(White)	
-4-2	Cover BK	PBA00006-0	1	(Black)	
-5	SA FFC LCD	PPS40001-0	1		
-6	SA LCD PCB	PPS00002-0	1		
-7-1	Label Adjust Cam (WH)	PRX30005-0	1	(White)	
-7-2	Label Adjust Cam (BK)	PRX30004-0	1	(Black)	
-8	Screw, BHT (PT), M2.0X5	E12820-050F	4		


CL-S400DT

Drawing No. 9

Parts List & Location for Accessories

Revision Up List		
Sheet No.	Rev. No.	Date
1/1	0	July. 12, 2011

DRAWING NO. 9 Accessories (Rev. 0)

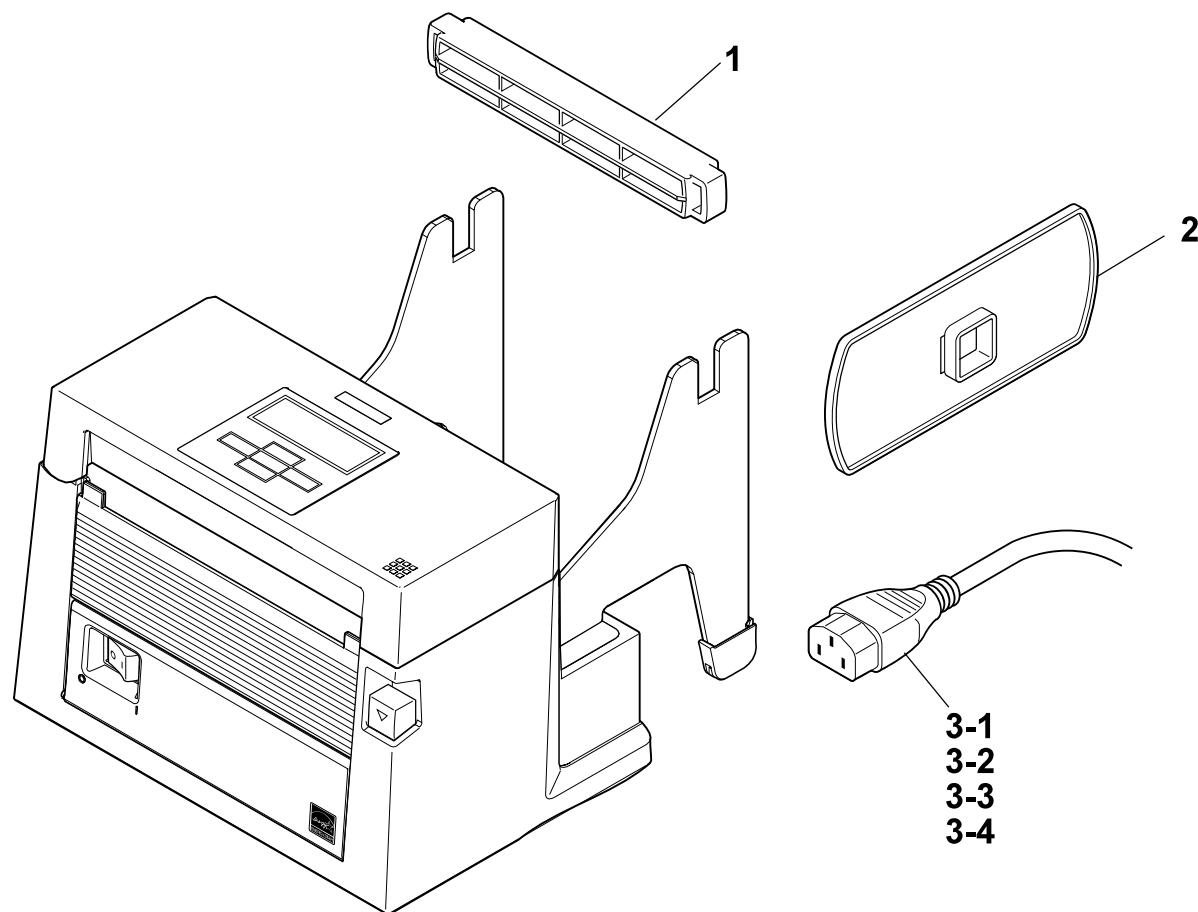

PARTS LIST for CL-S400DT

TITLE: Accessories

Sheet No. 1/1

Drawing No. -

Rev. No. 0

Location	Part Name	Part No.	Q'ty/ Unit	Remarks	@
9-1	Shaft, Paper	JM79202-0	1		
-2	Flange, Paper Wide	JM79201-0	1		
-3-1	CORD SET (UL/CSA)	C6009-000#	1	For CSA	
-3-2	CORD SET (OE Straight)	C6009-200#	1	For CSE	
-3-3	CORD SET (UK)	C6009-300#	1	For CSE	
-3-4	CORD SET (CHINA)	C6009-800#	1	For China	
—	Manual User's & Drivers (CD-R)	PXY90001-0	1	For CSA/CSE	
—	Manual User's & Drivers (CD-R)	PXY90004-0	1	For China	
—	Guide Quick-Start	PXZ00002-0	1	For CSA/CSE	
—	Guide Quick-Start	PXZ00005-0	1	For China	
—	Label, Accessory 150LA-1	JN79902-0	1	Label Paper	