



# Chromebox Mini

*An Enterprise Ready Solution  
Running on Chrome.*

**Small, but powerful: the smallest enterprise-ready Chromebox today, designed for the signage, POS, corporate and kiosk markets. Empower customers with ease of experience and greater control of in-store engagement.**


The AOPEN Chromebox Mini is a highly reliable and powerful enterprise grade solution that operates 24/7 under tough conditions (up to 40°C). It sets itself apart from any Chromebox, being the most flexible of its kind. The small size combined with strong computing power creates the perfect solution for any commercial or corporate environment. The Chromebox Mini ensures a speedy, simple, secure and scalable solution.

Deployment and management of the devices has never been easier using Chrome Device Management. This easy and powerful tool allows users to remotely manage entire fleets of AOPEN Commercial Chrome devices.

*The advantages of the Chromebox Mini:*

- Tough and tamperproof design for 24/7 operability in commercial and public environments (<40°C/104°F)
- Smallest chrome form factor available in the market today, for easy integrations
- A cost-effective solution for lower TCO
- The solid-state and fanless design ensure a first-rate performance in ruggedized environment
- AC Power Auto Recovery (APAR)
- Included dual band antenna offers a wide reach
- Kiosk and POS device extensions via commercial converts
- Optional Chrome Device Management on request to save valuable time, costs on installation, programming and maintenance



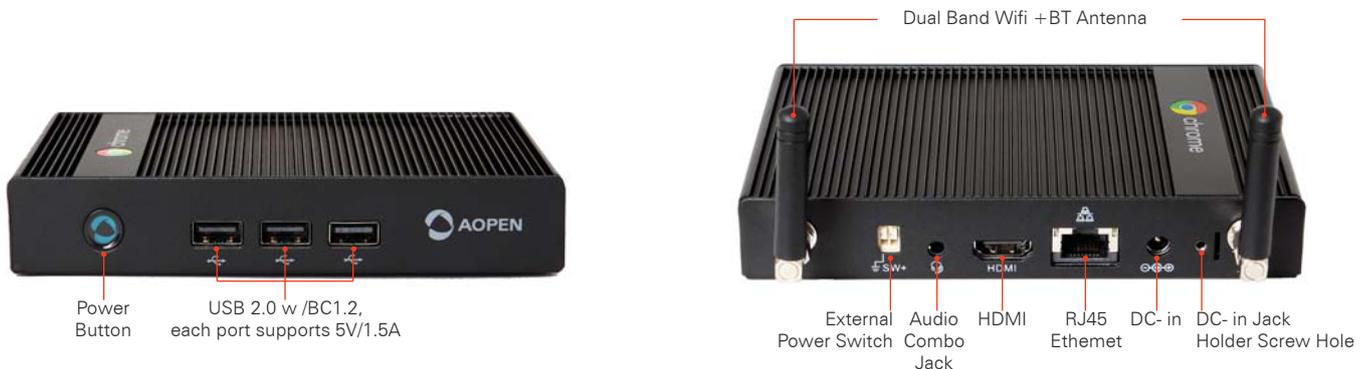

# Chromebox Mini

Specifications			
Features	The most flexible Enterprise Ready Grade Solution in the market today. Running on the Chrome OS. APAR (AC Power Auto Recovery)	Front Panel I/O	USB 2.0 port support BC1.2 x 3
Commercial Features	Operating Shock 8G, Operating Temperature up to 40°C/104°F	Power Button with LED	x 1
Operating System	Chrome OS	Power switch	x 1
CPU	Rockchip RK3288C Quad-Core Cortex-A17 turbo up to 1.8GHz	HDMI	x 1
Graphics	ARM Mali-T764 MP4 GPU clocked at 600 MHz	Ethernet RJ45	x 1
Memory	Dual Channel 4GB LPDDR3 Memory down design	Audio Combo Jack	x 1 (Line out/Line in)
Storage	EMMC 5.0 16 GB	WiFi	BT4.0 : 802.11 b/g/n
LAN	Gigabit 10/100/1000 Mbps	Antenna hole	x 2
Form Factor	Dimensions (WxDxH)	Wide Votage Range DC input	DC 12~60V power inlet Jack x 1
	Net Weight	Operating Temperature	0°C ~ 40°C 32°F ~ 104°F
	Color	Storage Temperature	-20°C ~ 60°C -7°F ~ 140°F
Display	GPU with ARM Mali-T764 GPU, with TE, ASTC, AFBC technology (Images & Basic HTML only). Limited Video Playback Up to 1080p display resolution Image enhancement processor	Relative Humidity	90%@50°C
Audio	Maxim MX98090	Vibration	Random 2Grms
Networking	Giga LAN Realtek RTL8211E-VB with LED indicate Wi-Fi+ Bluetooth; Wireless 802.11 b/g/n/ac + BT4.0	Accessories	User Manual Power Cord/ Power Cord Clip 40W AC to DC 19V Adapter 2.4/5G dual band Antenna (x 2)
		Optional Accessories	POS peripheral connectors: Mounting Rails
		Warranty	The Chromebox Mini comes with a 1 year warranty. Extended warranty optional for 3 years.
		For more information on Chrome Mini products, visit us at <a href="http://www.aopen.com/chrome">www.aopen.com/chrome</a>	