

CITIZEN® Barcode Label Printers


CLP-1001, CLP-2001, CLP-6001, CLP-6002



CLP-1001



CLP-2001

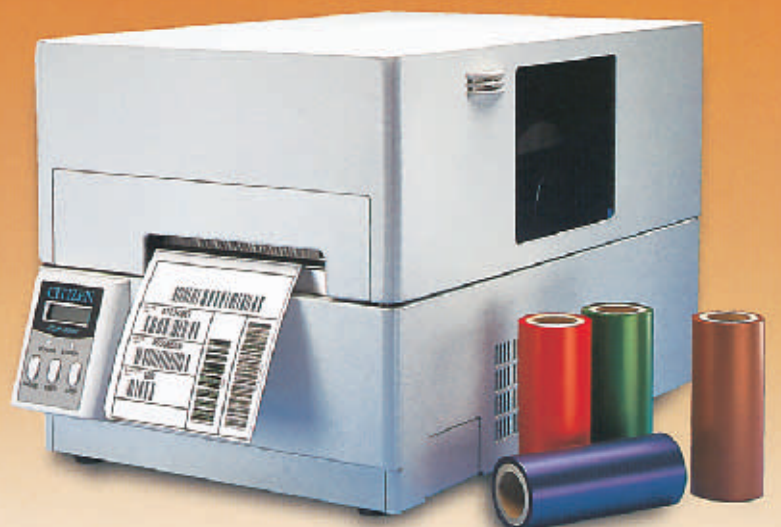

**CLP-6001
CLP-6002**



The CLP-1001 and CLP-2001 are designed for light to medium manufacturing and warehousing applications and they are the perfect solution for on-demand or small batch labeling jobs.

The CLP-6001 and CLP-6002 have a full metal case and performs as fast as 178.7 mm per second to meet industrial applications.

They all feature unique clamshell print mechanism design that allows for ease of operation when changing thermal transfer ribbons and media papers.

Specifications

Model	CLP-1001	CLP-2001	CLP-6001	CLP-6002
Print technology	Direct Thermal	Thermal/Thermal transfer	Thermal/Thermal transfer	
Print speed	101.6 mm per second		up to 178.7 mm per second	
Print resolution	203 dpi		203 dpi	
Media width	max. 118.0 mm		max. 118.0 mm	
Print width	max. 104.0 mm		max. 104.0 mm	
Max. print length	406.0 mm		812.0 mm	
Mini. print length	12.7 mm		12.7 mm	
Paper thickness	0.0635 mm ~ 0.254 mm		0.0635 mm ~ 0.254 mm	
Media detection sensor	Fixed sensor		Adjustable sensor	Fixed sensor
Ribbon type	wax, wax/resin or resin		wax, wax/resin or resin	
Barcode types	Code 3 of 9, UPC-A/E, interleaved 2 of 5, Code 128 EAN-8/13, HIBBC, Dodabar, Code 93, UCC128,		Code 3 of 9, UPC-A/E, interleaved 2 of 5, Code 128 EAN-8/13, HIBBC, Dodabar, Code 93, UCC128, logmars (two dimensional), Maxicode, PDF 417 etc	
Standard fonts	9 alpha-numeric fonts (including OCR-A, OCR-B), 2 SMOOTH fonts		9 alpha-numeric fonts (including OCR-A, OCR-B), 2 SMOOTH fonts	
Memory	2 Mb RAM on board		8Mb RAM on board	
Standard interfaces	RS-232C serial and Centronics parallel		RS-232C serial and Centronics parallel	
Indicators	LCD : 8 characters x 2 rows, LEDs : POWER and READY		LCD : 8 characters x 2 rows, LEDs : POWER and READY	
Power supply	110 or 220 VAC		110 or 220 VAC	
Operating environment	5°C ~ 35°C, Humidity 30 ~ 85% (non-condensing)		5°C ~ 35°C, Humidity 30 ~ 85% (non-condensing)	
Outer structure	Hard plastic case		Heavy-duty metal case	
Dimensions (mm)	245 mm (W) x 230 mm (H) x 207 mm (D)		260 mm (W) x 260 mm (H) x 430 mm (D)	
Weight	4.5 kgs		11.0 kg aprox. (excluding media and ribbon)	
Options	Auto cutter, Peeler, 8 " paper holder 1 Mb PCMCIA flash memory card		Auto cutter, Peeler, 1 Mb PCMCIA flash memory card	

All specifications are subject to change without notice

Japan CBM Corporation

Information Systems Division
5-68-10 Nakano, Nakano-ku, Tokyo, 164-0001 Japan
Tel: (81)-3-5345-7540
Fax: (81)-3-5345-7541
<http://www.jcbm.co.jp/>
e-mail: info-sys@jcbm.co.jp

Printed in Japan