


CITIZEN® Barcode Label Printer

CLP-8301

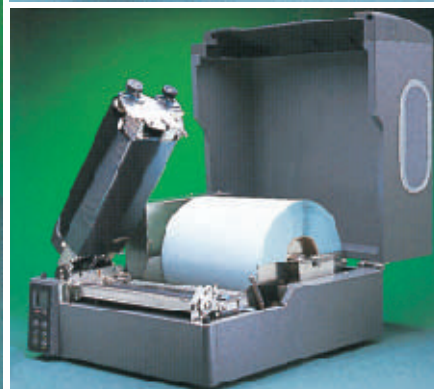

Wide media up to 228.6 mm can be used in this printer, and yet only a small installation space is needed, thanks to an innovative interior and exterior design. The wide-opening print head allows for easy access to the media and ribbon so loading is quick and very easy.

Specifications

Print technology	Thermal/Thermal transfer
Print speed	up to 102 mm per second
Print resolution	300 dpi
Media width	max. 228.6 mm
Print width	max. 219.5 mm
Max. print length	508.0 mm
Mini. print length	12.7mm
Paper type	max. roll media outer diameter : 203 mm, max. media width : 228.6 mm
Paper thickness	0.14 mm ~ 0.25 mm
Media detection sensor	Adjustable transparent and reflective sensors
Ribbon type	wax, wax/resin or resin
Barcode types	Code 39/93/128 (A/B/C), EAN 8/13, UPC-A/E, UPC-2 & 5 Digit, Codabar (NW-7), Interleaved 2 of 5, UCC/EAN 128, PDF-417, UPS MaxiCode, DataMatrix, Telepen
Standard fonts	9 alpha-numeric fonts (including OCR-A, OCR-B), 2 SMOOTH fonts
Memory	8Mb RAM and 2Mb Flash Memory on board
Standard interfaces	RS-232C serial and Centronics parallel
Indicators	LCD : 8 characters x 2 rows, LEDs : POWER and READY
Graphic data	7-bit ASCII, 8-bit HEX, PCX and BMP
Power supply	110 & 220 VAC universal power supply
Operating environment	5°C ~ 40°C, Humidity 25 ~ 85% (non-condensing)
Outer structure	Heavy-duty metal case
Dimensions (mm)	395 mm (W) x 260 mm (H) x 415 mm (D)
Weight	18 kg approx. (excluding media and ribbon)
Options	Auto cutter, Internal rewinder and peeler, 4 Mb PCMCIA flash memory I/F : IEEE1284 parallel, USB, Ethernet

All specifications are subject to change without notice

Japan CBM Corporation

Information Systems Division
5-68-10 Nakano, Nakano-ku, Tokyo, 164-0001 Japan
Tel: (81)-3-5345-7540
Fax: (81)-3-5345-7541
<http://www.jcbm.co.jp/>
e-mail: info-sys@jcbm.co.jp

Printed in Japan