

The 42" entry level display **DSD42-HA2**




The DSD42-HA2 is designed for continuous use; each component is carefully chosen and rigorously tested to offer the utmost in both durability and reliability. The narrow bezel makes it easy to integrate this display in different retail designs.



- + Zoom and shrink scaling
- + Speaker line out : 8Wx2
- + OSD support
- + Keypad /IR Remote Control
- + Thermal alarm
- + Auto Detection/calibration, Scaling

DSD42-HA2

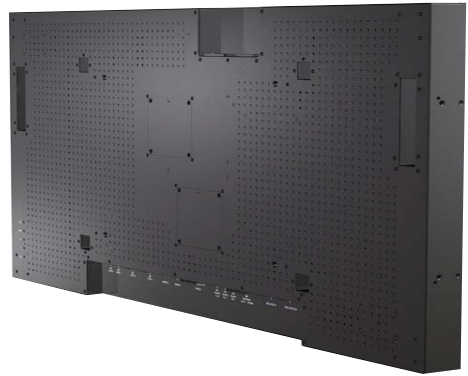

Model name		DSD42-HA2
Features		Narrow Bezel; Fanless; Thermal Alarm & Protection; RS232 remote control API utility support; External IR socket R-J12
Screen size		42"
Dimension	Set W x H x D (mm)	962x 555x 52 mm
	Package W x H x D (mm)	1083x 675x 230 mm
Bezel width		11.8 mm
Display Orientation		Landscape/portrait
Green Compliance		RoHS : Yes
Internal Speaker		Option
IR remote control		Yes
Keypad		Yes
Regulation and Standard Compliance		FCC, UL, CE, CB, BSMI
Humidity		10-80% R.H. max
Lifetime		50,000 Hrs
Power	Consumption (Max.)	110 W
	Consumption at Stand-by(Max.)	1.5 W
	Input	100~240VAC; 90W Max.
	Output	100~240VAC, 400W (Max)

I/O Port	AC inlet	x 1
	AC outlet	x 1
	HDMI	x 2
	VGA	x 2
	External Speaker	R/L 8Wx2
	RS232 in	x 1
	RS232 out	x 1
Temperature	Audio in	x 2
	Audio out	x 1
Temperature	Operating temperature	0°C to 40°C
	Storage temperature	-20°C to 60°C
LCD Panel		
Resolution		1920 x1080
Pixel Pitch		0.4845x0.4845
Brightness		700nits
Viewing Angle		178/178
Contrast Ratio		4000:1
Response Time		8 ms
Color/gray scale		1073M/10bits
Aspect ratio		16:9
Frequency		60Hz
Surface Treatment		AG,3H

*Accessories available on demand



Authorised Australian & New Zealand Distributor:
 Goodson Imports Pty Ltd
 9 Liberty Road
 Huntingwood NSW 2148
 Representation in all main States and New Zealand
 Ph: 02-8875 4544 Fax 02-8875 4588
www.goodson.com.au

The specifications depicted may be subject to change without prior notice.
 All trademarks are copyright of their respective owners. © AOPEN Inc.