


DSD55-HE2

The DSD55-HE2-T is a bright, eye catching touch screen.

This display is especially designed to change passive customers into an engaged audience that are actively involved in the interactive content on the screen.

With the possibility to view and touch the screen in landscape as well as portrait mode this touch display is highly flexible in any scenario.

- Narrow Bezel
- Metal Framework
- Fanless
- Thermal Alarm & Protection
- RS232 remote control API utility support

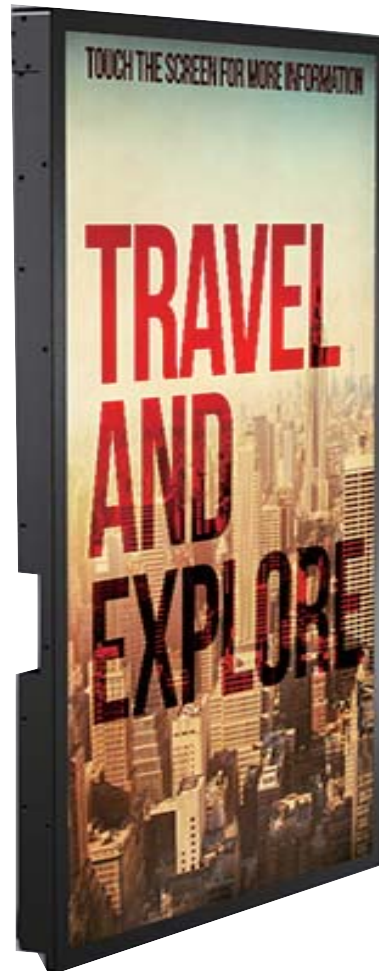

The all-around 55" display

Display Orientation	Portrait / Landscape
IR remote control	RS232 Remote Control
Operating Temperature	0~40°C
Operating Humidity	10~80% RH max
Storage Temperature	-20° to 60°
Storage Humidity	10~80%RH max

Connectivity

Touch Screen 2 point, IR Touch
USB interface

Panel

Type E-LED Panel Size 55"
Resolution: 1920x1080
Dimension: 1286 x 755 x 67.2 mm
Slim Bezel: 34.8 mm
Pixel Pitch: 0.21x0.63
Brightness: 700 nits
Viewing Angle: 178/178
Contrast Ratio: 4000:1
Response Time (Average) 6.5 ms

Power

AC Input : 100~240VAC;
AC Output: 100~240VAC
Power Consumption (Max.) 120W

Special features

Mounting Type: VESA FDMI: 500x400 / 300x400
Fanless, Thermal Alarm & Protection
I/O Port: AC inlet x1 / AC outlet x1, HDMI x2,
VGA x2, RS231 in x1 / RS232 out x1, Audio in x2
/ Audio out x1, Speaker line out R/L

Tempered Glass

AG+AF Tempered, 4mm

