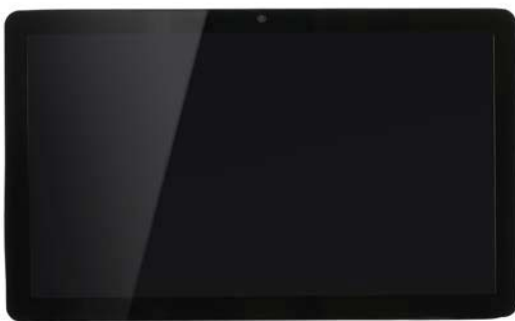# eTILE 15M

The eTILE 15M is an ultra-thin, ultra-powerful and multi-purpose 15.6" multi-touch PC tile, based on Intel® Core™ Processor technology and built to perform in the most demanding commercial environments. The eTILE 15M is highly robust with built-in cable management so that no ports are visible to the customer, making the device totally secure and tamper proof.

+ Ideal for POS due to its small size
+ No necessity for an enclosure or kiosk
+ Low operating and installation costs
+ Robust PCT panel: dust and water proof (IP65)

35mm

| eTILE 15M | | | |
|---|---|---|---|
| Dimensions | 380.5 x 230 x 35 mm (W x H x D) | Touch Panel | PCT Multi Touch Surface (10 point touch)<br>Pencil Hardness = 7H per ASTM D3363<br>Pen Hitting: more than 20,000,000 times (loading 180g) |
| Weight | 3.5kg | Speakers | Built-in 2W Stereo Speaker |
| | | Webcam | Built-in 1.0M |
| Mass Storage | 2.5" SATA III HDD x1<br>(optional 2.5" SATA SSD x1) | Security | Optional cover provided for hidden keypad (in DS application)<br>Secure Cable and port cover (magnetized option for POS application) |
| CPU | Intel® 2nd and 3rd generation Intel® Core™ i3, i5, i7 mobile processor TDP≤35W | System I/O | DC 19V Jack x1<br>RS232 Port (Monitor) x1<br>HDMI Out Port x1<br>RJ45 LAN Jack x1<br>USB2.0 x2<br>USB 3.0 x2<br>Line-out x1, Mic-in x1 |
| Chipset | Intel® QM77 | | |
| Memory | Supports: 2 x DDRIII SO-DIMM (Max 8G) | | |
| LAN | Single Intel Gigabit Ethernet<br>10/100/1000<br>Built-in WiFi antenna (optional Wi-Fi card b/g/n) | Front Panel | IP65 grade Dust- & Waterproof |
| | | Watchdog Timer | 1 sec ~ 255 sec |
| Audio | Realtek ALC886 | Accessories | Wall Mount Kit x1<br>120W Power Adapter x1<br>Power Cord x1<br>Utilities & Drivers CD x1 |
| Mini-Card Slot | Full size x1 (support mSATA), Half size x1 | | |
| LCD | Default Resolution : 15.6" (1920x1080)<br>Maximum Brightness : 300 Nits | | |
| Aspect Ratio/Resolution | 16:9/Full HD | | |

Supports:

*Android only available on OpenSign platform