

FlexPOS 315



Wireless Touch POS Terminal Support Dual Display


Heisei FlexPOS 312 / 315 series compact platform is a fashionable low power , Fanless and 5-Wire resistive Touch Panel system. With the RS232,Cash Drawer, Wi-Fi and External IDE Connector and new MSR design for humanly and effective style. These excellent specifics are powerful enough to support the latest retail solution and most POS peripheral products.It is designed for the restaurant,club and other retail environments.With FlexPOS 315 series, you can reduce service time and increase your efficiency and profits.

Applications

FlexPOS 312/315 is ideal for Hospitality, Foodservice, Banking, Retail and medical use. It provides efficiency, reliable, fast and flexible solutions

Key Features

- RoHS Available
- Lower Power System
- Expandable Power I/O Connectors
- Durable and Low-Profile Design
- Support Dual Display Solution

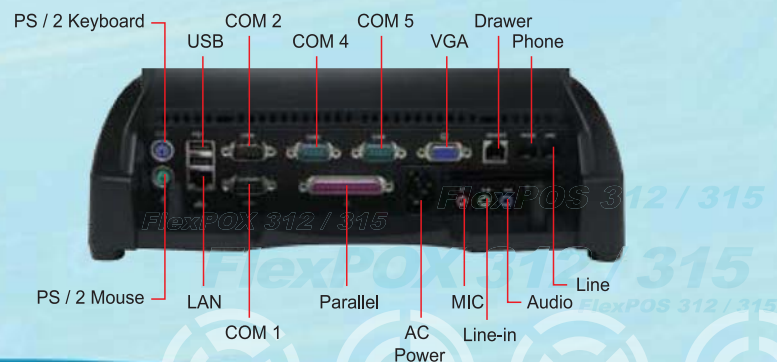

FLEXPOS

Insistence makes distinguished

- Quality your life
- Quality with our heart

FlexPOS 315



Wireless Touch POS Terminal Support Dual Display

System

CPU	Support Socket 462 Processors AMD Geode™ NX1750 @ 14W (1.4GHz) FSB133
Memory	1 x 184 pin DDR RAM socket up to 1GB, supports DDR 400/333/266
Chipset	VIA KN400 A + VT 8237R plus
Graphics	● Built-In Core Logic, AGP 4x, Share with system memory(Up to 64MB)
Network	10/100 Base-T fast Ethernet 802.11g Wireless LAN (Optional for FlexPOS 315 only) 56K Modem (Optional)
Audio	Realtek ALC Audio (AC 97 integrated) Built-in stereo speakers
Power Supply	ATX 180W, input range 100~240VAC @ 50~60Hz
OS	Windows 2000/XP/XPE, WEPOS
Key Lock	Front I/O key lock x 1
LED	Power, LAN, HDD

Display

LCD	● FlexPOS 312: 12.1" TFT ● FlexPOS 315: 15" TFT
Max. Resolution	● FlexPOS 312: 1024 x 768 ● FlexPOS 315: 1024 x 768
Brightness	● FlexPOS 312: 195 cd/m ² ● FlexPOS 315: 250 cd/m ²
Touch Screen	5-wire Analog resistive (ELO, E-Turbo)

Storage

HDD	1 x 3.5" IDE Hard Disk drive on pedestal (Optional)
Floppy	1 x Slim type Floppy Disk drive (Optional) / 1 x Slim type Card Reader (Optional)
CF	1 x Compact Flash type I/II socket (Optional)

I/O Ports

USB	8 x USB 2.0(2 x Rear IO, 1 x Left Panel, 5 x On Board Pin Header)
Serial Ports	● 4 x DB-9 (COM1, 2, 4, 5) ● COM3 is reserved for touch panel ● COM6 is reserved for modem module. ● +5V/12V Selectable on pin 9
Parallel	1 x DB-25 parallel port (SPP/EPP/ECP)
LAN	1 x RJ-45 interface
PS/2	2 x PS/2 ports (For keyboard and mouse)
Audio	1 x Mic in / 1 x Line-out / 1 x Line-in
VGA	1 x DB-15 VGA interface for dual display
Modem	2 x RJ11 phone Jack for modem (Phone & Line)
Cash Drawer	1 x RJ11 DC12V for cash drawer
IDE (External)	1 x 50 Pin external IDE port with 5/12V DC out

Physical Dimensions

Display Tilting angle	10°C~85°C
Weight	● FlexPOS 312: 7.1 Kg ● FlexPOS 315: 8.1 Kg
Dimension	● FlexPOS 312: 362(W) x 310(H) x 323 (D) mm ● FlexPOS 315: 367(W) x 340(H) x 323 (D) mm

Environment

EMC & Safety	CE, FCC
Temperature	● Operating: 0 ~ 40°C ● Storage: -20 ~ 60°C
Humidity	10% ~ 90%

Optional Items

Modem	56K Modem
Compact Flash	Built-In Compact Flash Readers
Floppy	Slim type Floppy Disk drive
W-LAN	802.11g Wireless LAN module (For FlexPOS 315 only!!)
MSR	Track 1/2/3 Magnetic Stripe Reader
Customer Display	● VFD Customer Display ● LCD Customer Display
Dual-Display	● 12.1" TFT LCD Module ● 15" TFT LCD Module
OS	Windows 2000/XP/XPE, WEPOS

* The specification is subject to change without any prior notice.

Australian Distributor:



142 Wicks Road, North Ryde, Sydney NSW 2113
Ph.: 02-8875 4544 Fax: 02-8875 4588 Web: www.goodson.com.au