


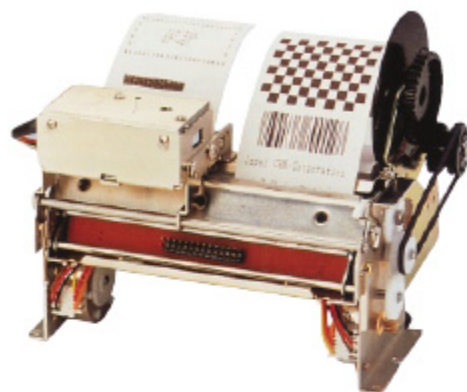

## Accessories

### Auto Cutter

AC-4P / 4F

|                        |                |
|------------------------|----------------|
| Cutting method         | Guillotine     |
| Paper width            | 49.5 ± 0.5mm   |
| thickness              | 0.063mm        |
| Max. cutting frequency | 6 cuts/min     |
| Voltage                | 24V ± 10%      |
| Current (peak)         | 1.3A           |
| Operating temperature  | 5 ~ 40°C       |
| Size                   | 60 ¥ 55 ¥ 23mm |
| Weight                 | 260g           |
| Reliability            | 300,000 cuts   |
| Number of tab left     |                |
| Full cut blade type    | None or 1 tab  |
| Partial cut blade type | Several tabs   |

### Paper winder



AW-4H / 4V

# LT-483



- 2 station printing
- 50+50mm paper width
- 24V operation
- 100mm/sec high speed printing
- High reliability due to heavy duty design

## Specifications

|                                 |                       |                                                                                             |
|---------------------------------|-----------------------|---------------------------------------------------------------------------------------------|
| Printing method                 |                       | Line thermal dot printing                                                                   |
| Total dots                      |                       | 832 dots/lines                                                                              |
| Dot density                     |                       | 8 dots/mm                                                                                   |
| Printing width                  |                       | 44mm × 2                                                                                    |
| Printing speed                  |                       | Max. 100mm/sec (800 dot-lines/sec)                                                          |
| Paper feeding pitch             |                       | 0.125mm                                                                                     |
| Sensors                         | Head temperature      | Thermistor                                                                                  |
|                                 | Paper presence        | Photo-interrupter                                                                           |
|                                 | Head-up               | Mechanical switch                                                                           |
| Voltage range                   | Vp                    | 24V DC ±5%                                                                                  |
|                                 | Vdd                   | 5V DC ±5%                                                                                   |
| Current                         | Head                  | 1.2A                                                                                        |
| Consumption                     | Motor                 | 0.96A                                                                                       |
| Recommended paper               | Width                 | 49.5mm × 2                                                                                  |
|                                 | Paper (Manufacturer)  | TF50KS-E2D (Nippon Paper)                                                                   |
| Reliability                     | Head pulse-resistance | 100,000,000 pulses or more                                                                  |
|                                 | Head wear-resistance  | 100km or more                                                                               |
| Environment                     | Operation             | Temperature: 5 ~ 40°C<br>Humidity: 35 ~ 80% RH                                              |
|                                 | Storage               | Temperature: -20 ~ 60°C<br>Humidity: 10 ~ 90% RH                                            |
| External dimensions (W × D × H) |                       | LT483: 155.2 × 60 × 71.5mm<br>LT483CF: 155.2 × 67 × 98.9mm<br>LT483CP: 155.2 × 67 × 100.2mm |
| Weight                          |                       | LT483: Approx. 560g<br>LT483CF: Approx. 750g<br>LT483CP: Approx. 760g                       |