

SRP-330II

3 inch Thermal POS Printer



Retail



Hospitality



Ticketing





Banking



Kiosk

Durable and Cost-Efficient

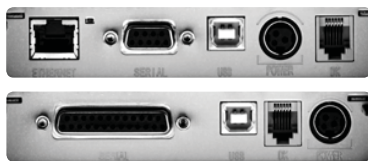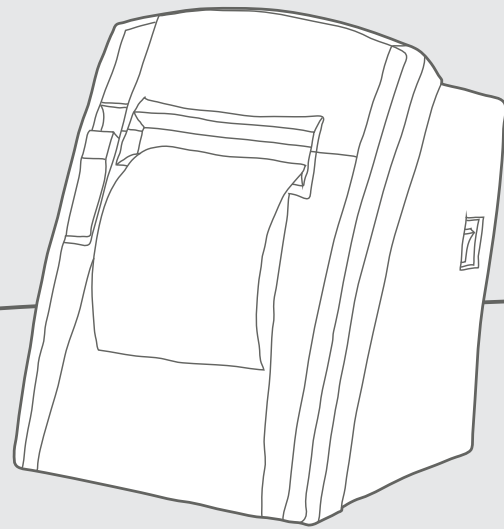

Cost-Efficiency

- All in one Plus™ Interface
 - Triple Interface
USB V2.0 FS + Ethernet + Serial
 - Dual Interface
USB V2.0 FS + Serial
USB V2.0 FS + Parallel
USB V2.0 FS + SD
- Paper saving mode, reducing the length of a receipt up to 25%

220
mm/sec

TPH
150Km



Reliable Printing Performance

- Printing speed up to 220 mm/sec
- High reliability mechanism :
150 km TPH & 1.5 Million cuts Auto Cutter
- 203 dpi supported



Easy Tracking™



User-Friendly Design

- Stand-alone or space-saving wall-mount use
- 2" or 3" paper choice
- 2 inch partition included
- Anti-jam guide
- Easy Tracking™ supports a QR code linking to the technical support micro site on a unique label plate found on the bottom of the printer

BIXOLON®
a Better Solution for your Business™

SRP-330II

3 inch Thermal POS Printer

Specifications

Print Characteristics

Print Method

Direct Thermal

Print Speed

Up to 220 mm/sec

Print Resolution

SRP-330II: 180 dpi

SRP-332II: 203 dpi

Print Width

Up to 72 mm

Sensor

Paper End, Cover Open

Media Characteristics

Media Type

Receipt

Media Width

80 mm, 58 mm (with 2 inch Partition)

Media Roll Diameter

Up to 80 mm

Media Thickness

0.062 ~ 0.075 mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (W x L x D)

145 x 198 x 146 mm

(5.72 x 7.79 x 5.74 inch)

Weight

1.37 kg (3.02 lbs.)

Power

EnergyStar Certified,

External Power Adaptor 100-240V AV, 50/60Hz

Drawer Port

2 ports (via y-type adaptor)

Performance Characteristics

Memory

64 Mbit SDRAM, 32 Mbit FlashROM

NV Image Memory

768 Kbytes (Mono)

Receive Buffer

4 Kbytes

User Define Buffer

12 Kbytes

Interface

① USB V2.0 FS + Ethernet + Serial

② USB V2.0 FS + Serial

③ USB V2.0 FS + Parallel

④ USB V2.0 FS + SD

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)

Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH

Storage: 10 ~ 90% RH

Reliability

Thermal Print Head (TPH)

150 km

Auto Cutter

1.5 Million Cuts

***** Specified Paper**

- TF50KS-E (Paper thickness: 65µm)
: Nippon Paper industries Co., Ltd.

- PD 150R (Paper thickness: 75µm)
: New Oji Paper Mfg. Co., Ltd

- PD 160R (Paper thickness: 75µm)
: New Oji Paper Mfg. Co., Ltd.

- P350 (Paper thickness: 62µm)
: Kansaki Specialty Paper, Inc. (USA)

Software

Emulation

BXL / POS

Driver / Utility

Windows Driver, OPOS Driver, JPOS Driver,
Linux CUPS Driver, Mac Driver,
Virtual COM USB/Ethernet Driver, Utility Program

SDK

iOS SDK, Android SDK

Fonts / Graphics / Symbologies

Character Size

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24
KOR, CHN, JPN: 24 x 24

Characters Per Line

SRP-330II: - Font A: 42 Font B, C: 56
KOR, CHN, JPN: 21

SRP-332II: - Font A: 48 Font B, C: 64
KOR, CHN, JPN: 24

Character Sets

Alphanumeric: 95

Extended Graphics: 128 x 33 page

International: 32

Graphics

Supporting user-defined fonts, graphics,
formats, and logos

Barcode Symbologies

1D: Coda Bar, Code39, Code93, Code128,
EAN-8, EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, PDF417, QR Code

Accessories

Standard

2 inch Partition

Optional

USB A-B Cable, External buzzer, B-Melodist

Authorised Australian & New Zealand Distributor:
Goodson Imports Pty Ltd
9 Liberty Road
Huntingwood NSW 2148
Representation in all main States and New Zealand
Ph: 02-8875 4544 Fax 02-8875 4588
www.goodson.com.au

BR-SRP-330II-EN-MAR17-V1-NF

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON®

BIXOLON Co., Ltd.
+82 (0) 31 218 5500
sales@bixolon.com

BIXOLON America Inc.
+1 858 764 4580
sales@bixolonusa.com

BIXOLON Europe GmbH
+49 211 68 78 54 0
sales@bixolon.de

www.Bixolon.com

