
6. Exploded Views and Parts List

6-1. Exploded View (NR-520R)

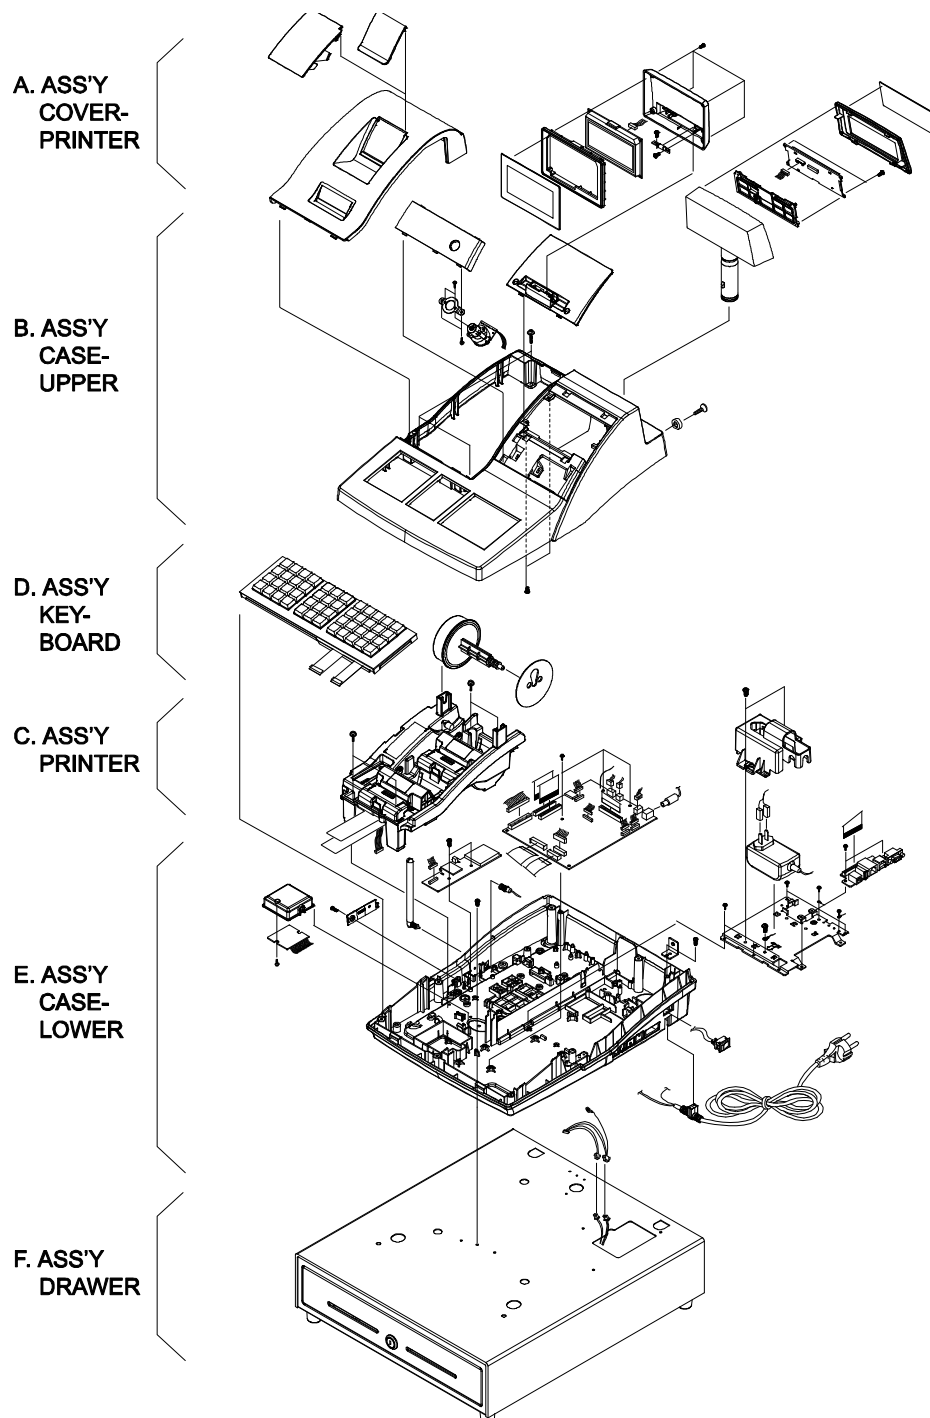


Figure 6-1 Total Disassembly (NR-520R)

6-1. Exploded View (NR-520)

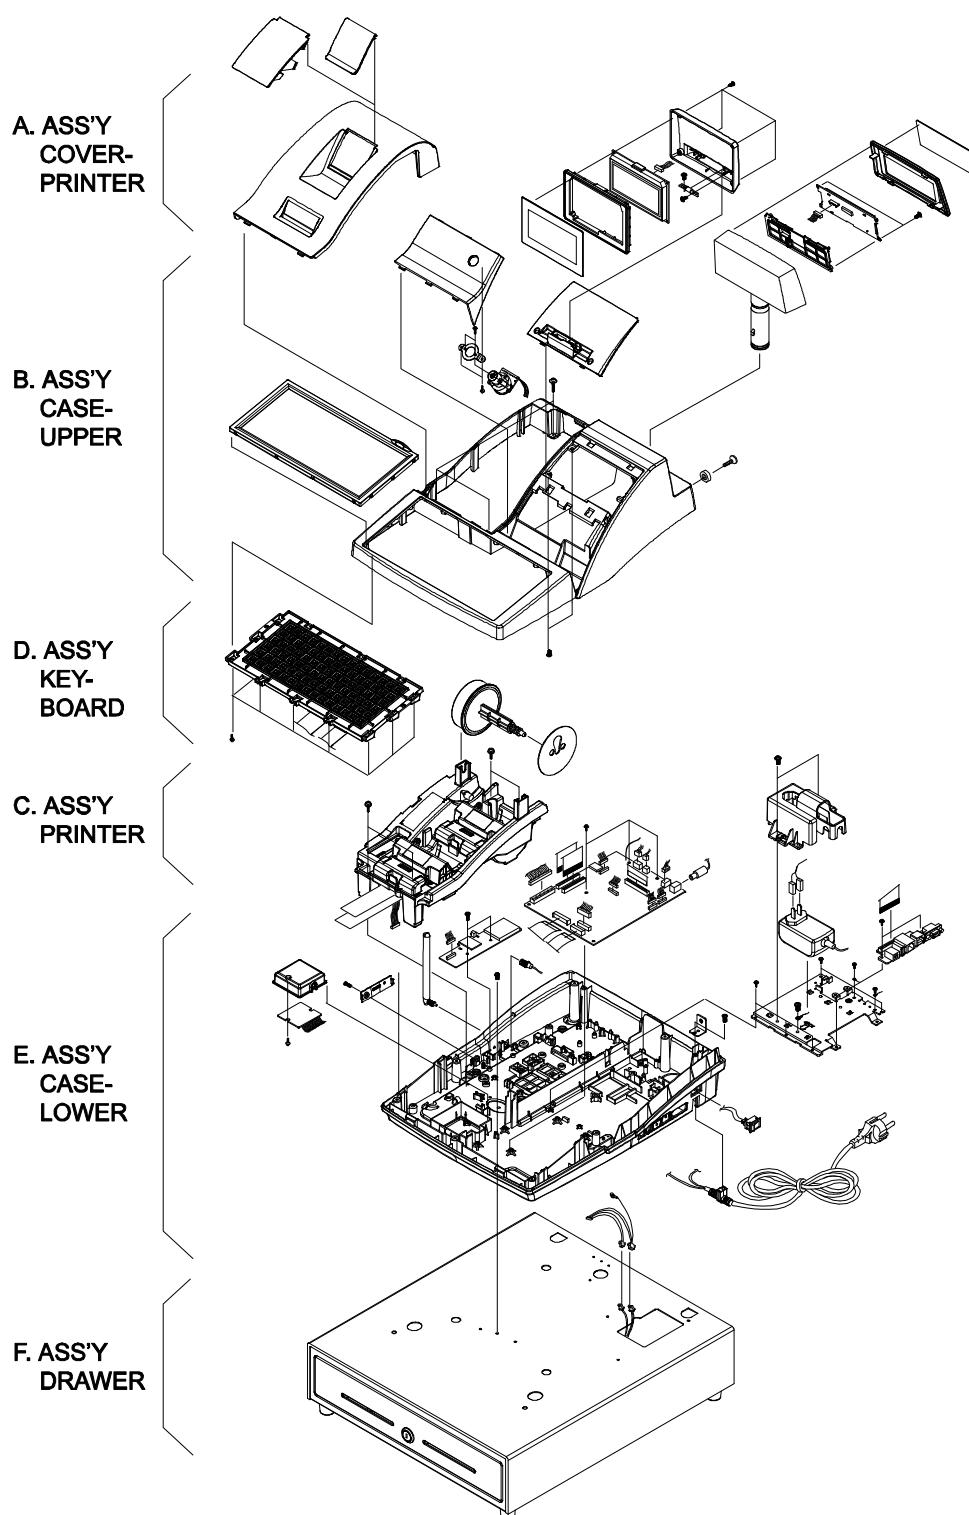


Figure 6-2 Total Disassembly (NR-520)

6-2 A. ASS'Y COVER-PRINTER

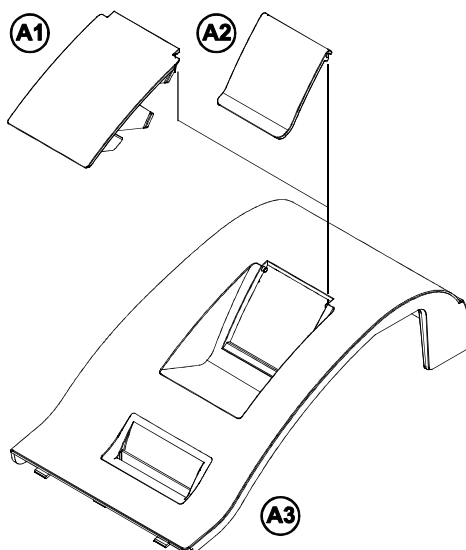


Figure 6-2 ASS'Y COVER-PRINTER

A. ASS'Y COVER-PRINTER

No.	Parts No.	Description / Specification	Q'ty	Design-Location	Serviceable	Remark
A	JK95-70675A	MEA-COVER PRINTER:NR-510	1		Y	IVORY
	JK95-70675B	MEA-COVER PRINTER:NR-520	1		Y	IVORY
	JK95-70675C	MEA-COVER PRINTER:NR-510B	1		Y	BLACK
	JK95-70675D	MEA-COVER PRINTER:NR-520B	1		Y	BLACK
A1	JK72-20980A	PMO-COVER DUMMY	1	NR-510	Y	IVORY
	JK72-20980B	PMO-COVER DUMMY	1	NR-510	Y	BLACK
A2	JK72-20026A	PMO WINDOW JOURNAL	1	NR-520	Y	
A3	JK72-20977A	PMO-COVER PRINTER	1		Y	IVORY
	JK72-20977B	PMO-COVER PRINTER	1		Y	BLACK
A4	JK70-20304A	IPR-CUTTER PAPER	1		N	

B. ASS'Y CASE-UPPER(NR-500R)

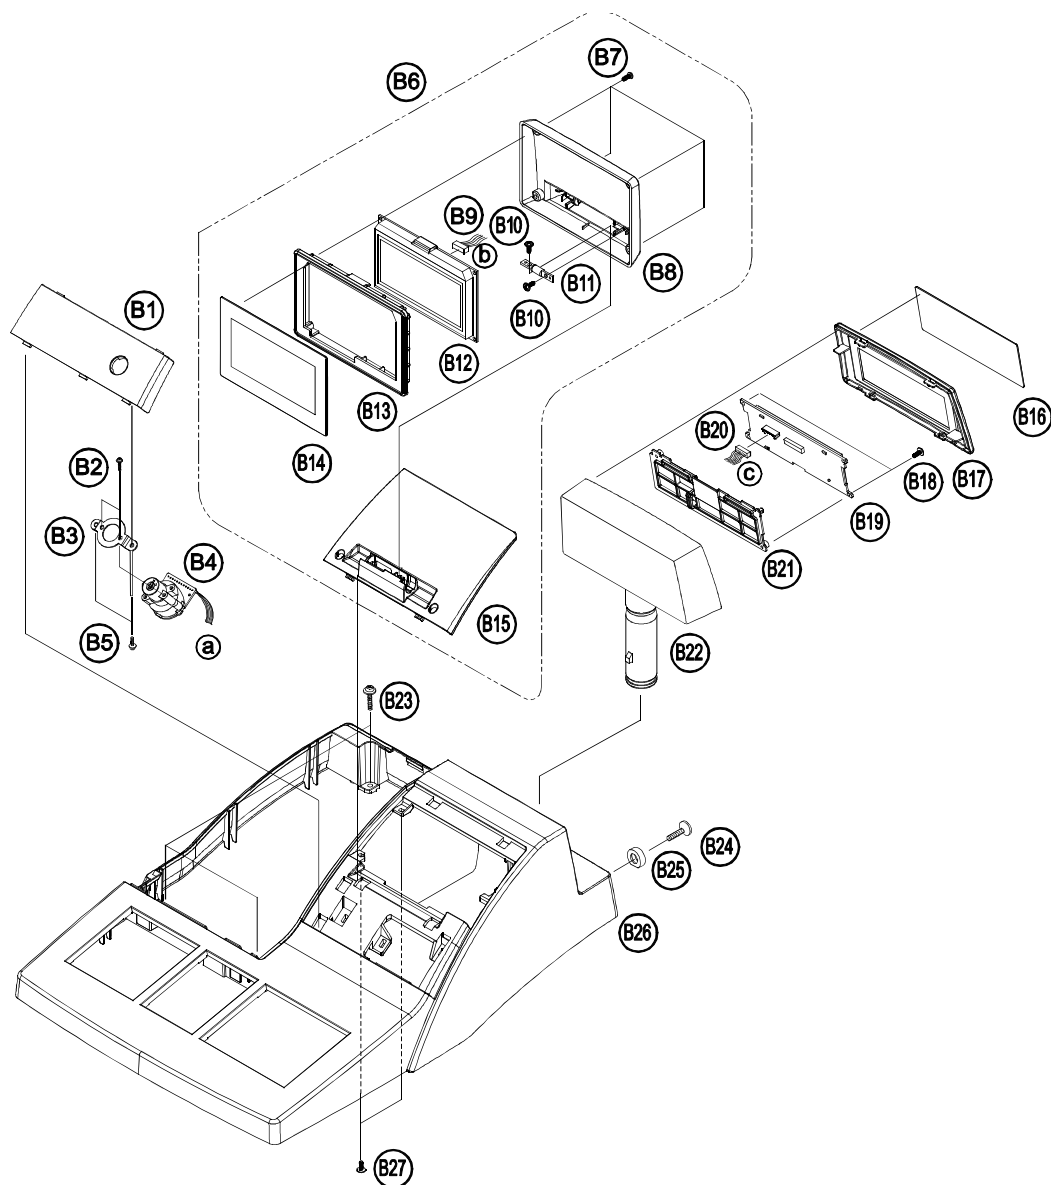


Figure 6-3 ASS'Y CASE-UPPER(NR-500R)

6-2. B. ASS'Y UPPER(NR-500R)

No.	Parts No.	Description / Specification	Q'ty	Design-Location	Serviceable	Remark
B1	JK72-20968S	PMO-COVER MODE S/W:NR-510R	1		Y	IVORY
	JK72-20968T	PMO-COVER MODE S/W:NR-520R	1		Y	IVORY
	JK72-20968W	PMO-COVER MODE S/W:NR-510RB	1		Y	BLACK
	JK72-20968Y	PMO-COVER MODE S/W:NR-520RB	1		Y	BLACK
B2	S600200011A	SCREW-TAPPING:PH,M3,L8	2		Y	
B3	JK70-20309A	IPR-BRKT MODE_S/W	1		Y	
B4	JK95-70098A	MODE KEY ASSY	1		Y	
B5	S600200011A	SCREW-TAPPING:PH,M3,L8	2		Y	
B6	JK95-70596C	ELA-LCD FRONT	1		Y	IVORY
	JK95-70596D	ELA-LCD FRONT	1		Y	BLACK
B7	S600200011A	SCREW-TAPPING:PH,M3,L8	4		Y	WHITE
	S600300017A	SCREW-TAPTITE:BH,M3,L8	4		Y	BLACK
B8	JK72-20337C	PMO-LCD REAR	1		Y	IVORY
	JK72-20337B	PMO-LCD REAR	1		Y	BLACK
B9	JK39-40756A	HARNESS-SD:10P,400mm	1		Y	
B10	S600300016A	SCREW-DELTA PT;M3X8(BH)	2		Y	
B11	JK75-40006A	MEC-HINGE ASS'Y	1		Y	
B12	JK07-70003A	LCD:NR-400,192*64,NEGATIVE	1		Y	
B13	JK72-20336C	PMO-LCD FRONT	1		Y	IVORY
	JK72-20336B	PMO-LCD FRONT	1		Y	BLACK
B14	JK72-20825B	PMO-WINDOW VIEW	1		Y	
B15	JK72-20891A	PMO-HOLDER LCD	1		Y	IVORY
	JK72-20891B	PMO-HOLDER LCD	1		Y	BLACK
B16	JK72-20349A	PMO-WINDOW VIEW_R	1		Y	
B17	JK72-20630A	MO-WINDOW TURRET	1		Y	
B18	S600200006A	SCREW-TAPPING:PWH,M3,L8	2		Y	
B19	JK07-70002A	DISPLAY-LCD:16Char*2line	1		Y	
B20	JK39-80007B	HARNESS-DISPLAY:8P,450mm	1		Y	
B21	JK72-20629A	PMO-HOLDER LCD REAR	1		Y	
B22	JK72-20703D	PMO-TURRET BODY	1		Y	IVORY
	JK72-20703C	PMO-TURRET BODY	1		Y	BLACK
B23	S600200004A	SCREW-TAPPING:PH,M4,L15	3		Y	WHITE
	S600200029A	SCREW-TAPPING:PH,M4,L14	3		Y	BLACK
B24	S600100010A	SCREW-MACHINE:FH,M4,L10	1		Y	WHITE
	S600100040A	SCREW-MACHINE:FH,M4,L10	1		Y	BLACK
B25	JK70-70073A	ICT-SHAFT MOLDING	1		Y	
B26	JK72-20963C	PMO-CASE UPPER:NR-500	1		Y	IVORY
	JK72-20963D	PMO-CASE UPPER:NR-500F	1		Y	IVORY
	JK72-20963H	PMO-CASE UPPER:NR-500B	1		Y	BLACK
	JK72-20963J	PMO-CASE UPPER:NR-500BF	1		Y	BLACK
B27	S600200006A	SCREW-TAPPING:PWH,M3,L8	2		Y	

6-2 B. ASS'Y CASE-UPPER(NR-500)

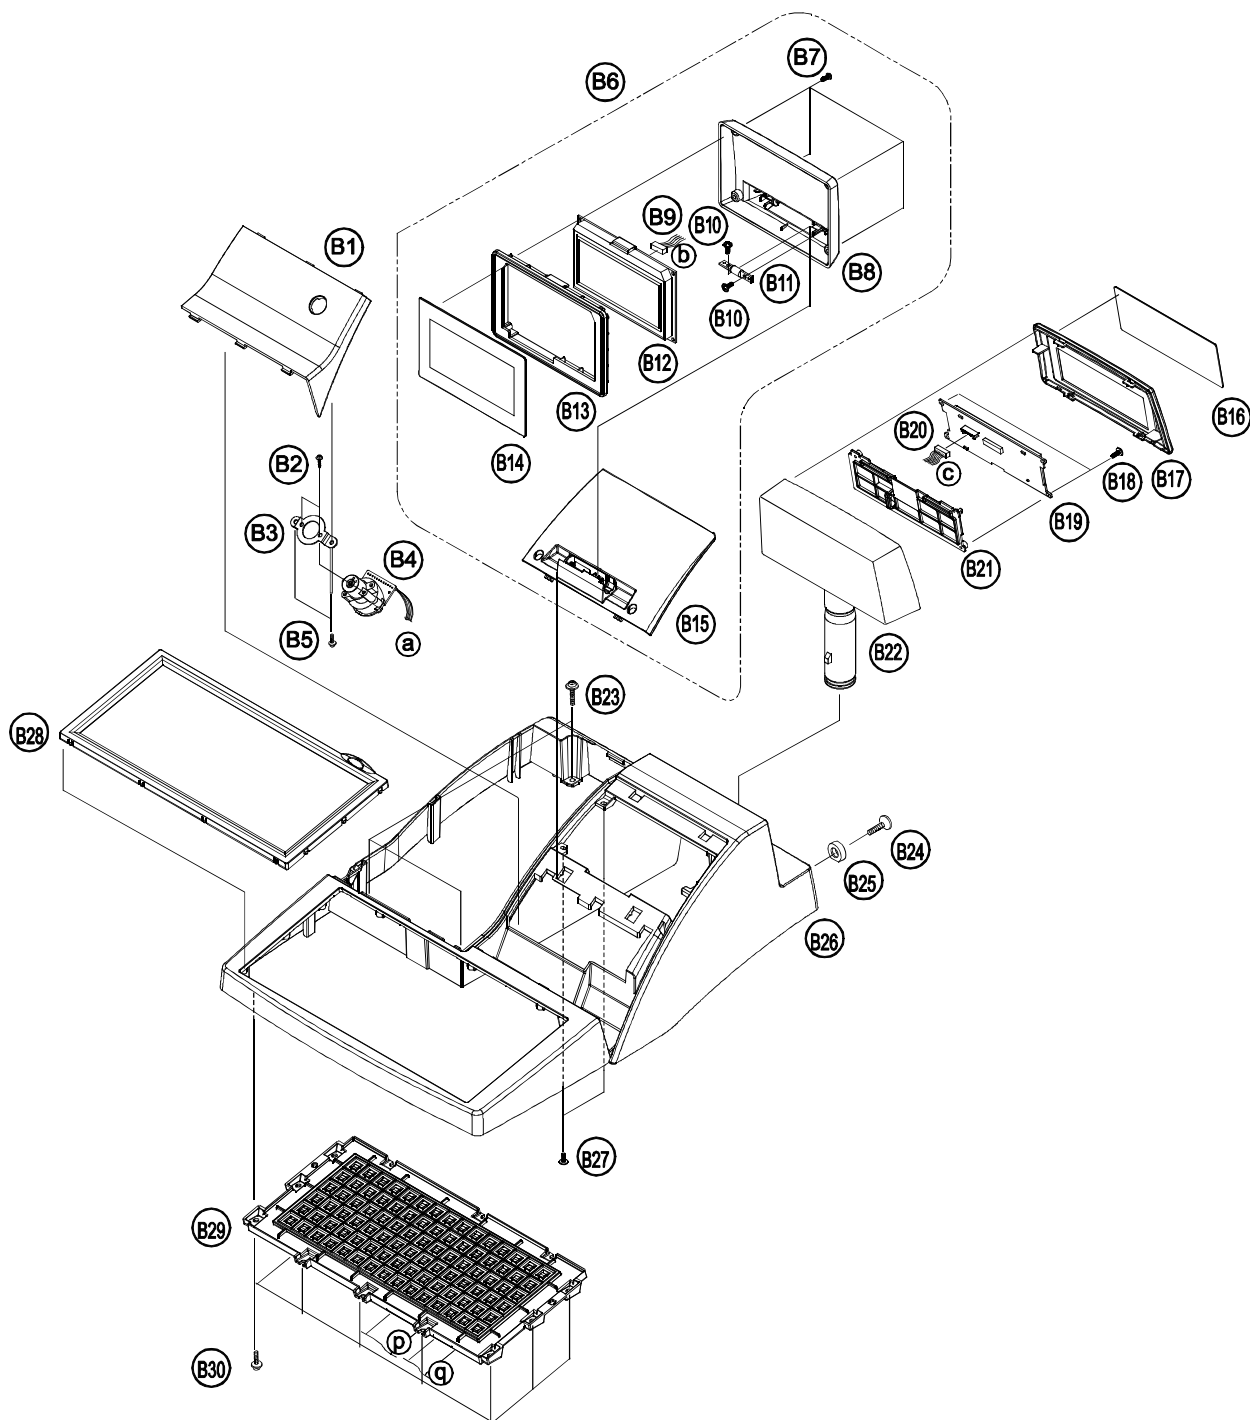


Figure 6-4 ASS'Y CASE-UPPER(NR-500)

6-2. B. ASS'Y UPPER(NR-500)

No.	Parts No.	Description / Specification	Q'ty	Design-Location	Serviceable	Remark
B1	JK72-20214K	PMO-COVER MODE S/W:NR-510	1		Y	IVORY
	JK72-20214L	PMO-COVER MODE S/W:NR-520	1		Y	IVORY
	JK72-20214M	PMO-COVER MODE S/W:NR-510B	1		Y	BLACK
	JK72-20214N	PMO-COVER MODE S/W:NR-520B	1		Y	BLACK
B2	S600200011A	SCREW-TAPPING:PH,M3,L8	2		Y	
B3	JK70-20309A	IPR-BRKT MODE_S/W	1		Y	
B4	JK95-70098A	MODE KEY ASSY	1		Y	
B5	S600200011A	SCREW-TAPPING:PH,M3,L8	2		Y	
B6	JK95-70596C	ELA-LCD FRONT	1		Y	IVORY
	JK95-70596D	ELA-LCD FRONT	1		Y	BLACK
B7	S600200011A	SCREW-TAPPING:PH,M3,L8	4		Y	WHITE
	S600300017A	SCREW-TAPTITE:BH,M3,L8	4		Y	BLACK
B8	JK72-20337C	PMO-LCD REAR	1		Y	IVORY
	JK72-20337B	PMO-LCD REAR	1		Y	BLACK
B9	JK39-40756A	HARNESS-SD:10P,400mm	1		Y	
B10	S600300016A	SCREW-DELTA PT;M3X8(BH)	2		Y	
B11	JK75-40006A	MEC-HINGE ASS'Y	1		Y	
B12	JK07-70003A	LCD:NR-400,192*64,NEGATIVE	1		Y	
B13	JK72-20336C	PMO-LCD FRONT	1		Y	IVORY
	JK72-20336B	PMO-LCD FRONT	1		Y	BLACK
B14	JK72-20825B	PMO-WINDOW VIEW	1		Y	
B15	JK72-20891A	PMO-HOLDER LCD	1		Y	IVORY
	JK72-20891B	PMO-HOLDER LCD	1		Y	BLACK
B16	JK72-20349A	PMO-WINDOW VIEW_R	1		Y	
B17	JK72-20630A	MO-WINDOW TURRET	1		Y	
B18	S600200006A	SCREW-TAPPING:PWH,M3,L8	2		Y	
B19	JK07-70002A	DISPLAY-LCD:16Char*2line	1		Y	
B20	JK39-80007B	HARNESS-DISPLAY:8P,450mm	1		Y	
B21	JK72-20629A	PMO-HOLDER LCD REAR	1		Y	
B22	JK72-20703D	PMO-TURRET BODY	1		Y	IVORY
	JK72-20703C	PMO-TURRET BODY	1		Y	BLACK
B23	S600200004A	SCREW-TAPPING:PH,M4,L15	3		Y	WHITE
	S600200029A	SCREW-TAPPING:PH,M4,L14	3		Y	BLACK
B24	S600100010A	SCREW-MACHINE:FH,M4,L10	1		Y	WHITE
	S600100040A	SCREW-MACHINE:FH,M4,L10	1		Y	BLACK
B25	JK70-70073A	ICT-SHAFT MOLDING	1		Y	
B26	JK72-20213A	PMO-CASE UPPER:NR-500	1		Y	IVORY
	JK72-20213B	PMO-CASE UPPER:NR-500F	1		Y	IVORY
	JK72-20213D	PMO-CASE UPPER:NR-500B	1		Y	BLACK
	JK72-20213E	PMO-CASE UPPER:NR-500BF	1		Y	BLACK
B27	S600200006A	SCREW-TAPPING:PWH,M3,L8	2		Y	
B28	JK75-20033A	ASSY-KBD HOUSING	1		Y	IVORY
	JK75-20033B	ASSY-KBD HOUSING	1		Y	BLACK
B29	JK59-30027A	UNIT-KEYBOARD:90KEY	1		Y	
B30	S600200006A	SCREW-TAPPING:PWH,M3,L8	12		Y	

6-2 C. ASS'Y PRINTER

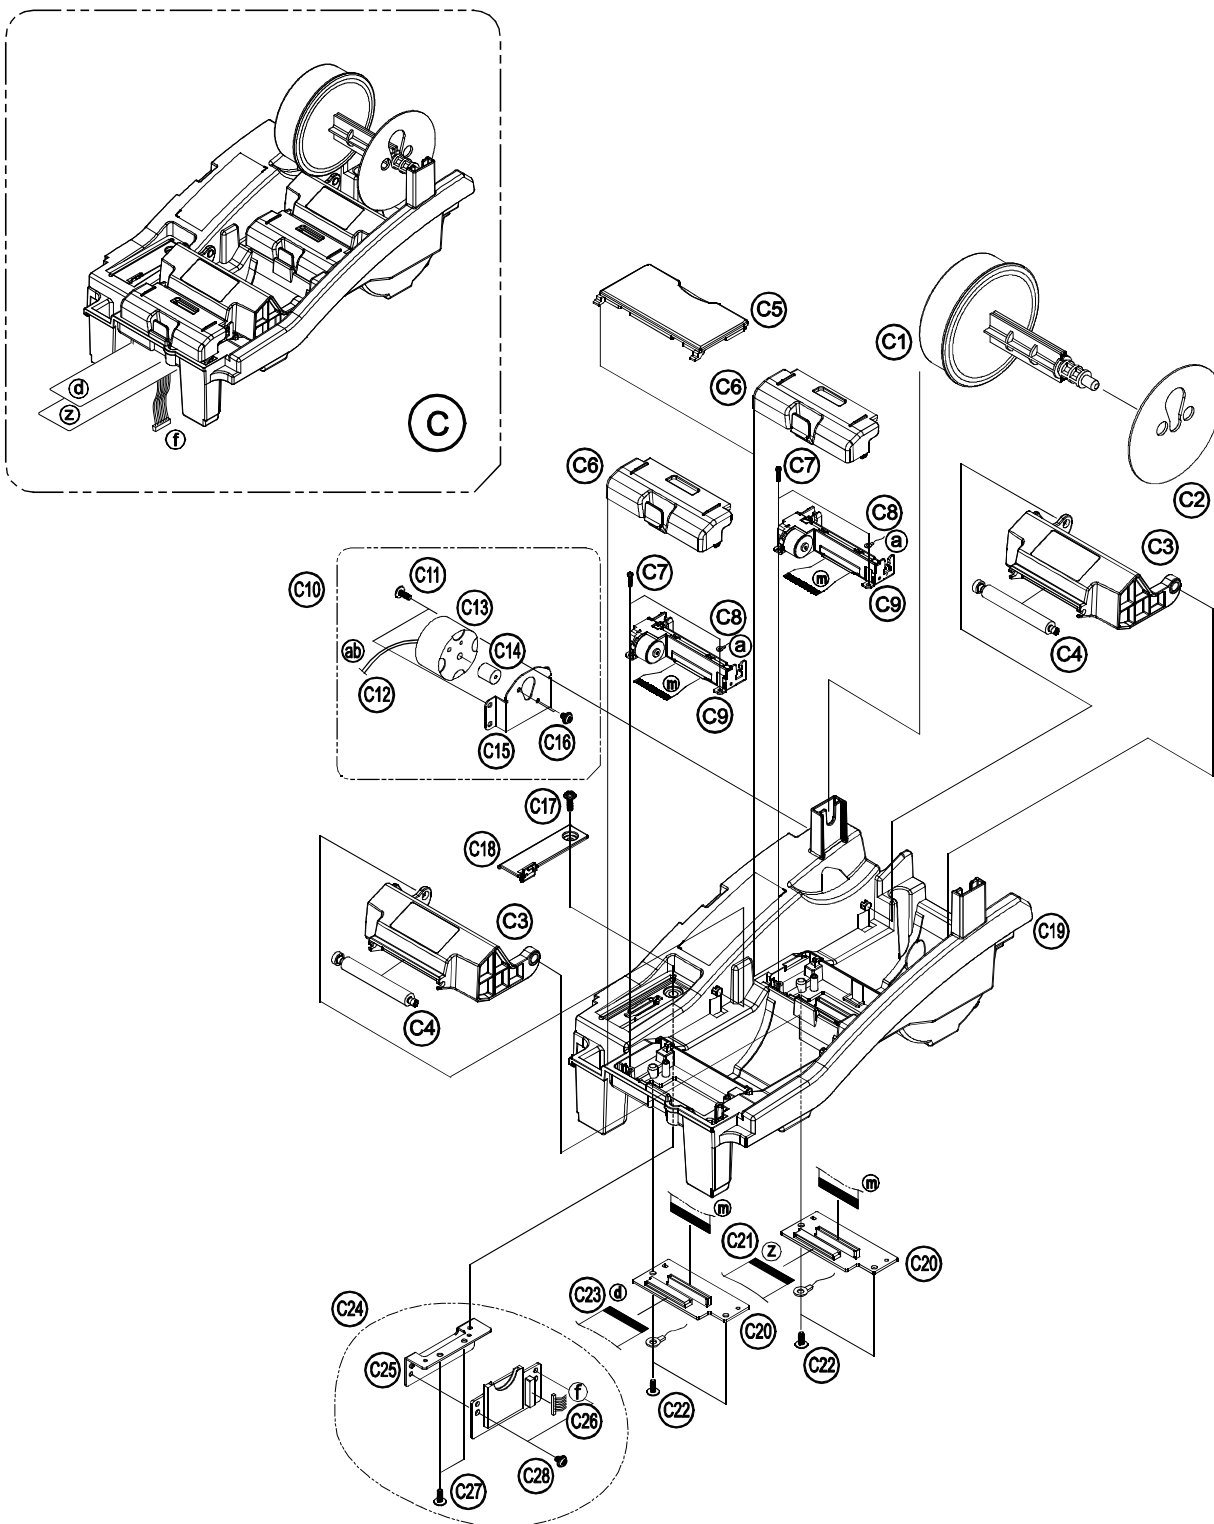


Figure 6-5 ASS'Y PRINTER

6 Exploded Views and Parts List

6-2. C. ASS'Y PRINTER

No.	Code No.	Description / Specification	Q'TY	Design-Location	Serviceable	Remarks
C	JK95-70674A	ELA_UNIT-PRINTER:NR-510	1		Y	
	JK95-70674B	ELA_UNIT-PRINTER:NR-520	1		Y	
C1	JK72-20979A	PMO-SPOOL WINDING	1		Y	
C2	JK72-20093A	PMO-GUIDE WINDING	1		Y	
C3	JK72-20979A	MO-HOUSING CLAM(2INCH)	2		Y	
C4	JK81-20004A	PLATEN-ROLLER:2INCH	2		Y	
C5	JK72-20234B	PMO-COVER 1STATION	1		Y	NR-510
C6	JK72-20272A	PMO-CAP PRINTER	2		Y	
C7	S600200032A	SCREW-TAPPING:PH,M2,L8	4		Y	
C8	JK39-50002A	GND-WIRE:150mm	2		Y	
C9	JK59-20003D	UNIT-PRINTER	2		Y	
C10	JK95-70690A	ASSY SPOOL MOTOR	1		Y	NR-520
C11	S600200006A	SCREW-TAPPING:PWH,M3,L8	2		Y	NR-520
C12	JK39-40686C	HARNESS-SPOOL:NR-500,3P,400mm,AT TAPE	1		Y	
C13	S310100012A	MOTOR-DC	1		Y	NR-520
C14	JK73-30200A	RCT-MOTOR	1		Y	
C15	JK70-20024A	IPR-BRKT SPOOL MOTOR	1		Y	NR-520
C16	S600100023A	SCREW-MACHINE:BH.,M2.6,L3	2		Y	
C17	S600100034A	SCREW-MACHINE:PWH,M3,L14	1		Y	
C18	JK72-20316A	PMO-COVER_SD	1		Y	
C19	JK72-20978A	PMO-HOLDER PRINTER	1		Y	
C20	JK92-10059J	PBA PRT JOINT:NR-500,SVC	2		Y	
C21	JK39-40565A	CABLE-FFC:ER-260,30P,1.0mm,300mm	1		Y	JOURNAL
C22	S600200006A	SCREW-TAPPING:PWH,M3,L8	4		Y	
C23	JK39-50005A	CABLE-FFC:ER-230,30P,1.0mm,160mm	1		Y	RECEIPT
C24	JK92-10039A	PBA SUB:SD CARD	1		Y	
C25	JK70-20122A	IPR-BRKT SD	1		Y	
C26	JK39-40756D	HARNESS-SD:220mm	1		Y	
C27	S600200006A	SCREW-TAPPING:PWH,M3,L8	2		Y	
C28	S600100016A	SCREW-MACHINE:PWH,M3,L4	2		Y	

6-2 D. ASS'Y KBD(48KEY RAISED)

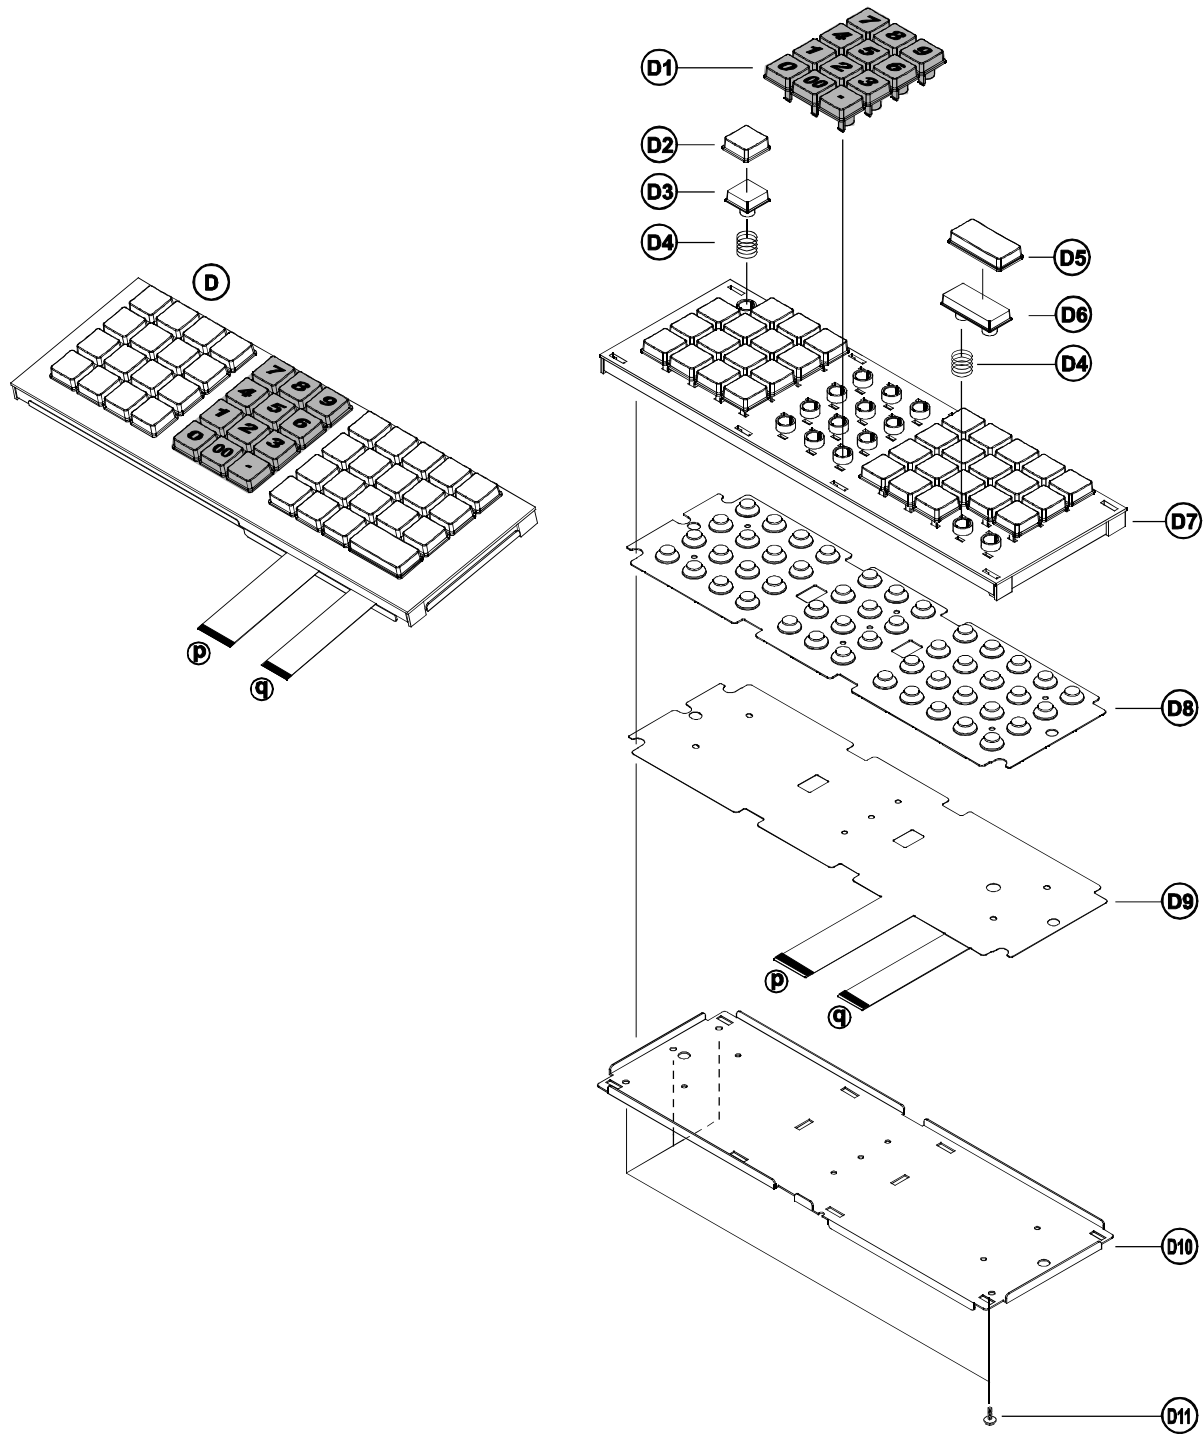


Figure 6-6 ASS'Y-KEYBOARD (48 Key)

6 Exploded Views and Parts List

6-2. D. ASS'Y KBD(48KEY RAISED)

No.	Parts No.	Description / Specification	Q'ty	Design-Location	Serviceable	Remark
D	JK59-30077A	UNIT-KEYBOARD:NR-510R,RAISED,48KEY	1		Y	IVORY
	JK59-30077B	UNIT-KEYBOARD:NR-510RB,RAISED,48KEY	1		Y	BLACK
	JK59-30077C	UNIT-KEYBOARD:NR-520R,RAISED,48KEY	1		Y	IVORY
	JK59-30077D	UNIT-KEYBOARD:NR-520RB,RAISED,48KEY	1		Y	BLACK
D1	JK72-20483A	KEY NUMBER SET	1		Y	
D2	JK72-20476A	PMO-KEY CAP_1X1	32		Y	
D3	JK72-20479A	PMO-KEY TOP_1X1	32		Y	
D4	JK81-20061A	RETURN-SPRING	36		Y	
D5	JK72-20477A	PMO-KEY CAP_1X2	2		Y	
D6	JK72-20480A	PMO-KEY TOP_1X2	1		Y	
D7	JK81-20052A	PMO-KBD FRAME_48,RAISED	1		Y	
D8	JK81-20052D	CONTACT-RUBBER_48	1		Y	
D9	JK81-20052C	ASSY-FPC,48KEY,RAISED	1		Y	
D10	JK81-20052B	IPR-BOTTOM PLATE_48	1		Y	
D11	S600200006A	SCREW-TAPPING:PWH,M3,L8	4		Y	

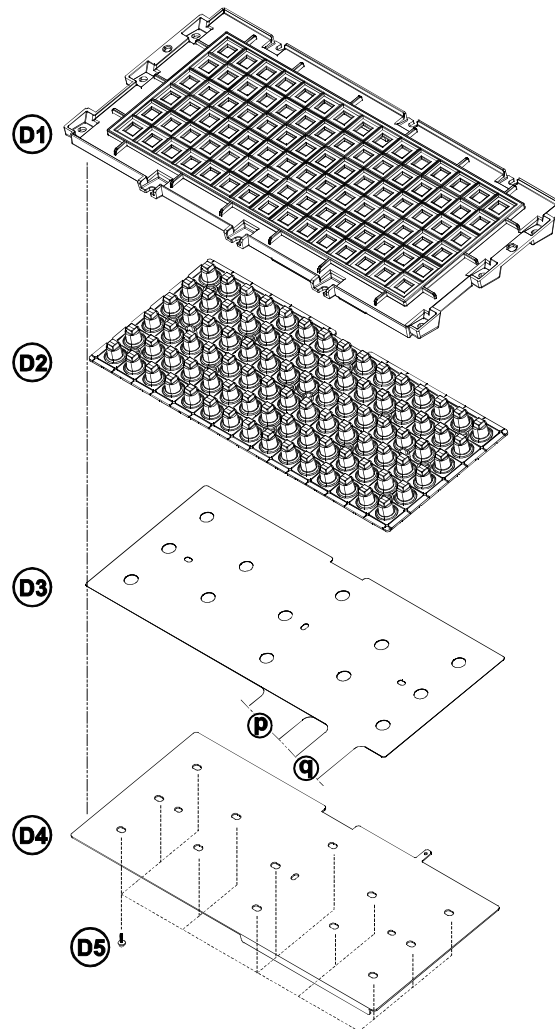
6-2 D. ASS'Y KBD(90KEY FLAT)

Figure 6-7 ASS'Y-KEYBOARD (90 Key)

6-2. D. ASS'Y KBD(90KEY FLAT)

No.	Parts No.	Description / Specification	Q'ty	Design-Location	Serviceable	Remark
D	JK59-30027A	UNIT-KEYBOARD:ER-390,90 KEY,FLAT	1		Y	IVORY
	JK59-30027B	UNIT-KEYBOARD:ER-390B,90 KEY,FLAT	1		Y	BLACK
D1	JK81-20049A	FRAME:90 KEY	1		N	
D2	JK81-20049B	KEY-RUBBER:90 KEY	1		N	
D3	JK81-20049C	FPC-ASSY:90 KEY	1		Y	
D4	JK81-20049D	BASE-PLATE:90 KEY	1		N	
D5	JK81-20049E	SCREW-TAPPING:M2.6X8	13		N	

6-2 E. ASS'Y CASE-LOWER

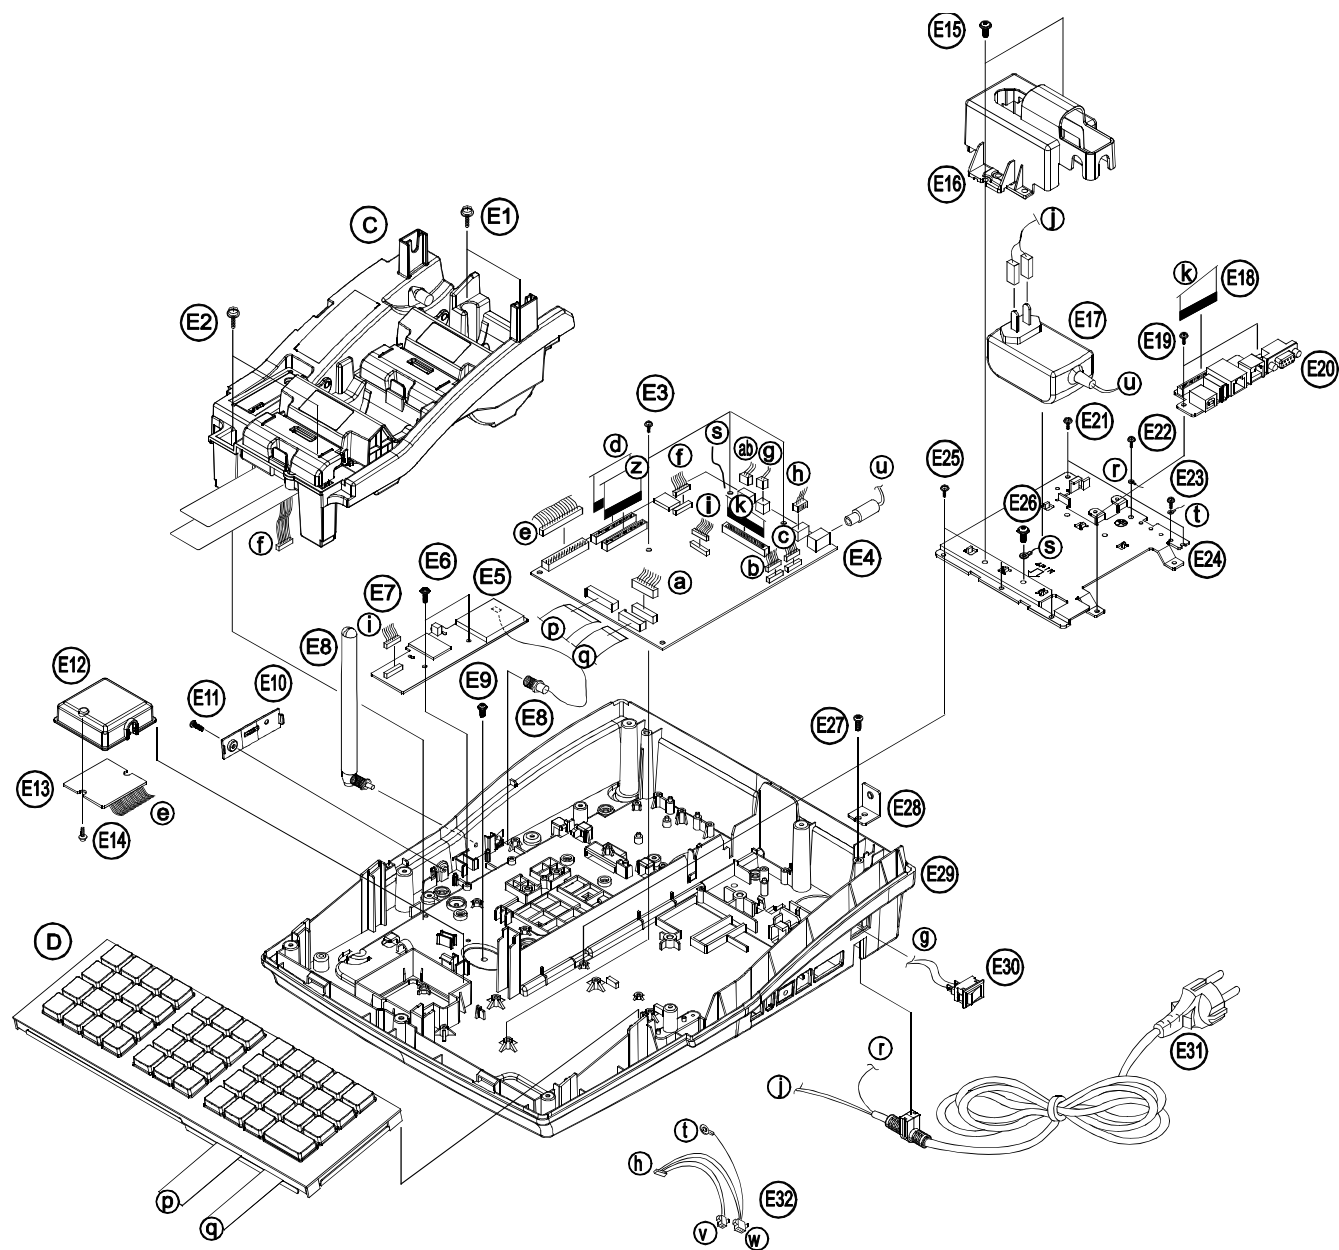


Figure 6-8 ASS'Y CASE-LOWER

6 Exploded Views and Parts List

6-2. E. ASS'Y CASE-LOWER

No.	Parts No.	Description / Specification	Q'ty	Design-Location	Serviceable	Remark
E1	S600200005A	SCREW-TAPPING: PWH,M3,L10	2		Y	
E2	S600200005A	SCREW-TAPPING: PWH,M3,L10	2		Y	
E3	S600200005A	SCREW-TAPPING: PWH,M3,L10	3		Y	
E4	JK92-10119A	PBA MAIN:NR-520,90KEY,8Mb,M/SD	1		Y	2-Station
	JK92-10146A	PBA MAIN:NR-510,90KEY,8Mb,M/SD	1		Y	1-Station
E5	JK92-10064A	PBA GPRS:ER-420EJ	1		Y	
E6	S600200005A	SCREW-TAPPING: PWH,M3,L10	2		Y	
E7	JK39-80007A	HARNESS-GPRS: 8P,200mm	1		Y	
E8	S421000001A	Dipole Antenna : GPRS, Quad Band, 900Mhz	1	ANTENA CABLE NUT WASHER	Y	
E9	S600300011A	SCREW-TAPTITE:PWH,M4,L10,	1		Y	
E10	JK72-20627A	PMO-COVER GPRS	1		Y	IVORY
	JK72-20627B	PMO-COVER GPRS	1		Y	BLACK
E11	S600200011A	SCREW-TAPPING:PH,M3,L8	1		Y	WHITE
	S600300016A	SCREW-DELTA PT;M3X8(BH)	1		Y	BLACK
E12	JK72-20118A	PMO-COVER FISCAL	1		Y	GREECE
E13	JK92-01284K	PBA SUB-FISCAL:ER-230,34P,2MBIT,3.3V	1	2Mbit	Y	
	JK92-10037A	PBA SUB-FISCAL:ER-230,34P,4MBIT,3.3V	1	4Mbit	Y	
E14	S600200028A	SCREW-TAPPING: PWH,M3,L6	1		Y	
E15	S600600005A	SCREW-ASSY TAPT: BH,M4,L8	2		Y	
E16	JK72-20628A	PMO-HOLDER ADAPTER	1		Y	
E17	JK95-70582A	ASSY-ADAPTOR: 9V/2.5A,USA	1		Y	
E18	JK39-50005A	CABLE-FFC: 30P,1.0mm,150mm	1		Y	
E19	S600100017A	SCREW-MACHINE:PWH, M3,L6,	2		Y	
E20	JK92-10059K	PBA INTERFACE:NR-500,W/O ETHERNET,SVC	1		Y	
E21	S600200005A	SCREW-TAPPING: PWH,M3,L10	2		Y	
E22	S600600002A	SCREW-ASS'Y MACH:WT,BH,+,M4,L6	1		Y	
E23	S600600006A	SCREW-ASSY TAPTITE:SWRCH18A,M3,L8	1		Y	
E24	JK70-20018B	IPR-BRKT TRANS	1		Y	
E25	S600200006A	SCREW-TAPPING:PWH,M3,L8	3		Y	
E26	S600600005A	SCREW-ASSY TAPT: BH,M4,L8	1		Y	
E27	S600200003A	SCREW-TAPPING:PH,M4,L10	1		Y	
E28	JK70-20307A	IPR-BRKT CASING	1		Y	
E29	JK72-20964P	PMO-CASE LOWER	1		Y	IVORY
	JK72-20964Q	PMO-CASE LOWER	1		Y	BLACK
E30	JK39-40688C	HARNESS-POWER S/W	1		Y	
E31	JK39-30002A	POWER-CORD:NR-500,EUROPE,220V,IVORY	1	EUROPE USA AUSTRALIA UK	Y	IVORY
	JK39-30002B	POWER-CORD:NR-500,USA,110V,IVORY				
	JK39-30002C	POWER-CORD:NR-500,AUSTRALIA,240V,IVORY				
	JK39-30002D	POWER-CORD:NR-500,UK,240V,IVORY				
	JK39-30001A	POWER-CORD:NR-500,EUROPE,220V,BLACK	1	EUROPE USA AUSTRALIA UK	Y	BLACK
	JK39-30001B	POWER-CORD:NR-500,USA,110V,BLACK				
	JK39-30001C	POWER-CORD:NR-500,AUSTRALIA,240V,BLACK				
	JK39-30001D	POWER-CORD:NR-500,UK,240V,BLACK				
E32	JK39-40603A	HARNESS DRA/COM;4PIN,180mm	1		Y	

6-2 F. ASS'Y-DRAWER(G-DRAWER:4B8C,5B6C)

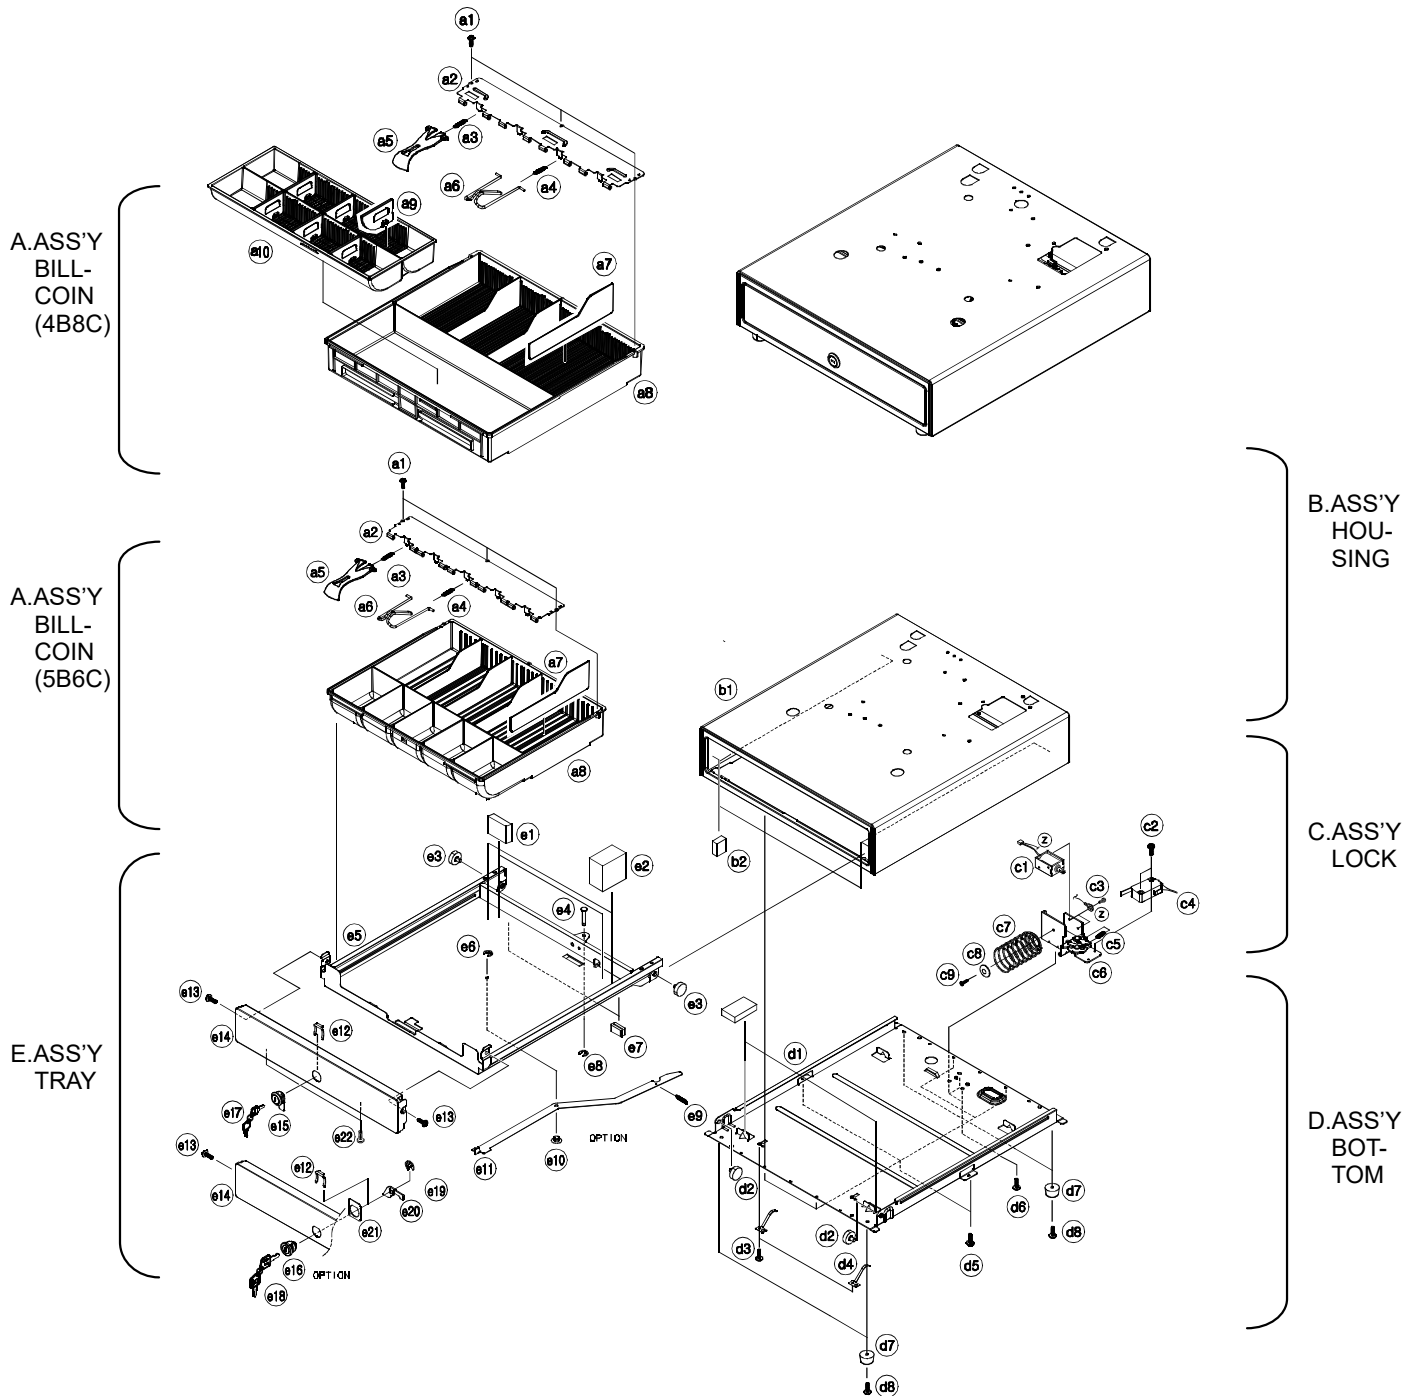


Figure 6-9 ASS'Y-DRAWER (G-DRAWER:4B8C,5B6C)

6-2 F. ASS'Y-DRAWER(G-DRAWER:4B8C,5B6C)

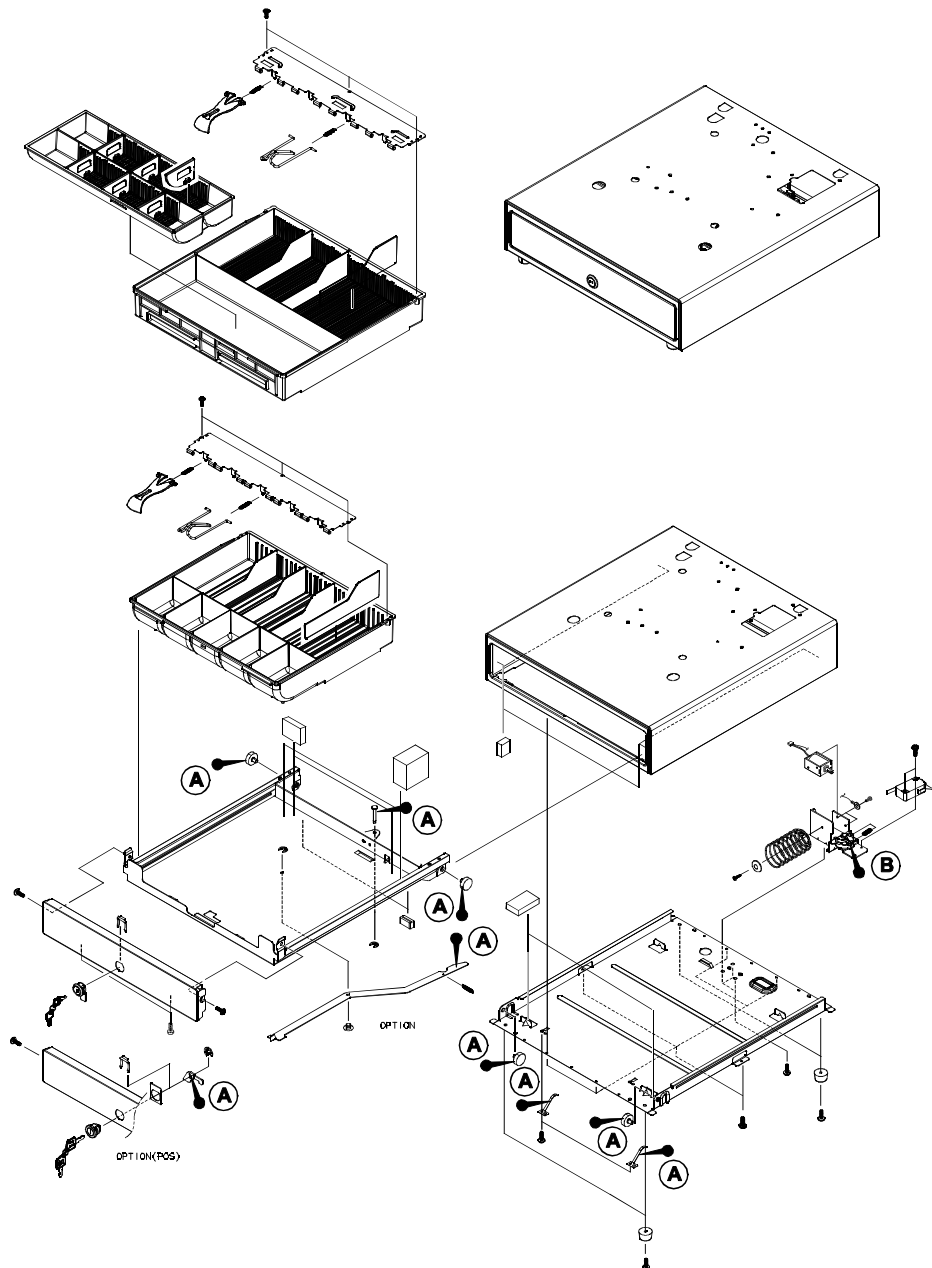


Figure 6-10 Lubrication Points of the G-Drawer(4B8C,5B6C)

No.	Code No.	Description / Specification	Q'ty	Serviceable	Remark
A	0201-002010	GREASE-N2	-	Y	Minimum Serviceable Packing Weight : 40g
B	0201-002009	GREASE-N1	-	Y	Minimum Serviceable Packing Weight : 40g

6 Exploded Views and Parts List

6-2 F. ASS'Y-DRAWER(G-DRAWER:4B8C,5B6C)

a. ASS'Y BILL-COIN (4B8C)

No.	Code No.	Description / Specification	Q'ty	Design-Location	Serviceable	Remark
a	JK97-20094B	MEA-UNIT BILL COIN(4B8C,PLASTIC)	1		Y	
a1	6002-000175	SCREW-TAPPING : M3,L8	3		Y	
a2	JK70-20114A	IPR-HOLDER PLATE(4B8C)	1		Y	
a3	JK70-30014A	SPRING-LEVER PRESS(MD)	4		Y	
a4	JK70-30015A	SPRING-LEVER PRESS(PD)	4		Y	OPTION
a5	JK72-20259A	PMO-LEVER PRESS(PLASTIC)	4		Y	
a6	JK70-20067A	IPR-LEVER PRESS(STEEL)	4		Y	OPTION
a7	JK72-40269A	PMO-BILL PARTITION	3		Y	
a8	JK72-20088A	PMO-BILL COIN TILL : 4B8C	1		Y	
a9	JK72-20090A	PMO-COIN PARTITION	6		Y	
a10	JK72-20089A	PMO-COIN TILL	1		Y	

a. ASS'Y BILL-COIN (5B6C)

No.	Code No.	Description / Specification	Q'ty	Design-Location	Serviceable	Remark
a	JK97-20094A	MEA-UNIT BILL COIN(5B5C)	1		Y	
a1	6002-000175	SCREW-TAPTITE : M3,L8	3		Y	
a2	JK70-20113A	IPR-HOLDER PLATE(5B5C)	1		Y	
a3	JK70-30014A	SPRING-LEVER PRESS(MD)	5		Y	
a4	JK70-30015A	SPRING-LEVER PRESS(PD)	5		Y	OPTION
a5	JK72-20259A	PMO-LEVER PRESS(PLASTIC)	5		Y	
a6	JK70-20067A	IPR-LEVER PRESS(STEEL)	5		Y	OPTION
a7	JK72-40269A	PMO-BILL PARTITION	4		Y	
a8	JK72-40268A	PMO-BILL COIN TILL : 5B5C	1		Y	

b. ASS'Y HOUSING

No.	Code No.	Description / Specification	Q'ty	Design-Location	Serviceable	Remark
b	JK97-20095A	MEA-UNIT HOUSING(STD,WHT)	1		N	
	JK97-20095B	MEA-UNIT HOUSING(NON,WHT)	1		N	
	JK97-20095E	MEA-UNIT HOUSING(STD,BLK)	1		N	
	JK97-20095F	MEA-UNIT HOUSING(NON,BLK)	1		N	

c. ASS'Y LOCK

No.	Code No.	Description / Specification	Q'ty	Design-Location	Serviceable	Remark
c	JK97-20093C	MEA-UNIT LOCK(12V,COM)	1		Y	
	JK97-20093D	MEA-UNIT LOCK(24V,COM)	1		Y	
c1	JK33-10500A	SOLENOID-DC: 24V	1		Y	
	JK33-10500D	SOLENOID-DC: 12V	1		Y	
c2	6001-000525	SCREW-TAPTITE: M3,L14	2		Y	
c3	JK70-50079A	SCREW-TAPTITE: M3,L5	2		Y	
c4	JK39-40301R	CBF HARNESS : MICRO S/W	1		Y	
c5	6107-001041	SPRING-LOCK LEVER	1		Y	
c6	JK97-01080B	MEC-SUB LOCK	1		N	
c7	JK70-30019A	SPRING-PUSH	1		Y	
c8	JK70-50090A	PLAIN-WASHER	1		Y	
c9	JK70-50092A	SCREW-TAPTITE: M5,L10	1		Y	

6-2 F. ASS'Y-DRAWER(G-DRAWER:4B8C,5B6C)

d. ASS'Y BOTTOM

No.	Code No.	Description / Specification	Q'ty	Design-Location	Serviceable	Remark
d	JK97-20096C	MEA-UNIT BOTTOM(5B5C,UNV)	1		N	
d1	JK70-20115B	IPR-BOTTOM PLATE	1		N	
d2	JK75-20068A	MEC-ROLLER(Φ 22)	2		Y	
d3	6003-000266	SCREW-TAPTITE: M3,L6	2		Y	
d4	JK70-10401A	IPR-PLATE GROUND	2		Y	
d5	6003-000266	SCREW-TAPTITE: M3,L6	6		Y	
d6	JK70-50092A	SCREW-TAPTITE: M5,L10	3		Y	
d7	JK61-40200A	FOOT-RUBBER:WHITE	4		Y	
	JK61-40200B	FOOT-RUBBER: BALCK	4		Y	
d8	6002-000234	SCREW-TAPTITE: M4,L16	4		Y	

e. ASS'Y TRAY

No.	Code No.	Description / Specification	Q'ty	Design-Location	Serviceable	Remark
e	JK97-20097E	MEA-UNIT TRAY TILL(BLK,UNV)	1		N	
	JK97-20097F	MEA-UNIT TRAY TILL(BLK,PUSH,UNV)	1		N	
e1	JK70-60041A	RMO-RUBBER STOPPER	2		Y	
e2	JK70-60042A	RMO-PAD UNIVERSAL	2		Y	
e3	JK75-20068A	MEC-ROLLER	2		Y	
e4	JK70-40302A	ICT-SHAFT PIN	1		Y	
e5	JK97-20100A	MEA-TRAY TILL	1		N	
e6	6044-000124	RING-E: ID3	1		Y	
e7	JK70-60041A	RMO-RUBBER STOPPER	2		Y	
e8	6044-000124	RING-E: ID3	1		Y	
e9	JK70-30020A	SPRING-LEVER PUSH	1		Y	
e10	JK70-40905A	ICT-SHAFT LEVER PUSH	1		Y	
e11	JK70-20116A	IPR-LEVER PUSH	1		Y	
e12	JK70-10323A	IPR-PLATE CLIP	1		Y	
e13	6003-000266	SCREW-TAPTITE: M3,L6	2		Y	
e14	JK70-20108A	IPR-FRONT PANEL(5B5C,WHT)	1		Y	
	JK70-20108B	IPR-FRONT PANEL(5B5C,BLK)	1		Y	
	JK70-20108C	IPR-FRONT PANEL(4B8C,WHT)	1		Y	
	JK70-20108D	IPR-FRONT PANEL(4B8C,BLK)	1		Y	
e15	JK75-20067A	MEC-KEY LOCK	1		Y	
e16	JK75-20041A	MEC-KEY LOCK: #2424	1		Y	OPTION
e17	JK70-20025B	IPR-KEY DRAWER	1SET		Y	
e18	JK70-20075A	IPR-KEY DRAWER: #2424	1SET		Y	OPTION
e19	6044-000231	RING-E: ID5	1		Y	
e20	JK70-20074A	IPR-LEVER LOCK	1		Y	
e21	JK70-20120A	IPR-DUMMY KEY	1		Y	
e22	JK70-50094A	SCREW-TAPTITE: M3,L8	2		Y	