



Send NV images to CBM1000ii


1. Download CITIZEN NV Bit Map Logo Utility from www.goodson.com.au/support
2. Install the utility.
3. Make sure the logo image is saved as “Monochrome Bitmap” format, and maximum horizontal image size is 576 pixels.
4. Start → Programs → CBMTools → GRLoader (screen should similar like this)

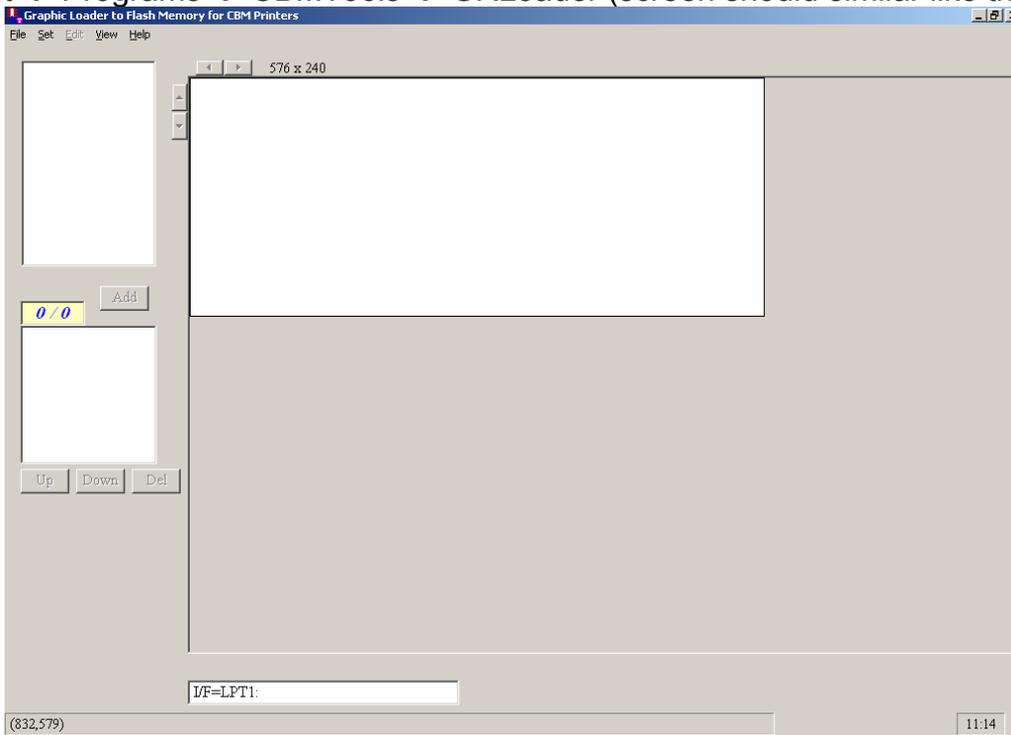


5. From Menu-Bar, Set → Interface to set PC's interface to match printer's interface.

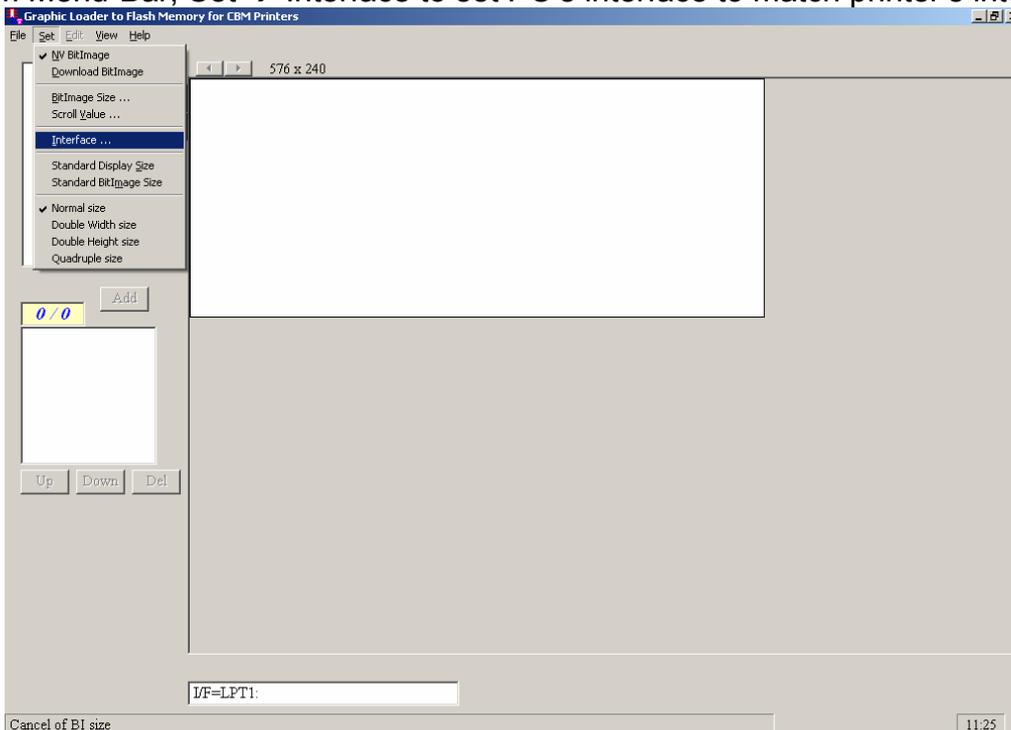


6. After changing, Click “Set”

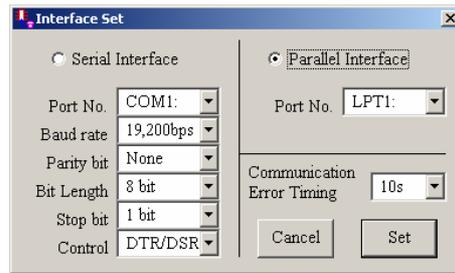


7. Then File → Open...

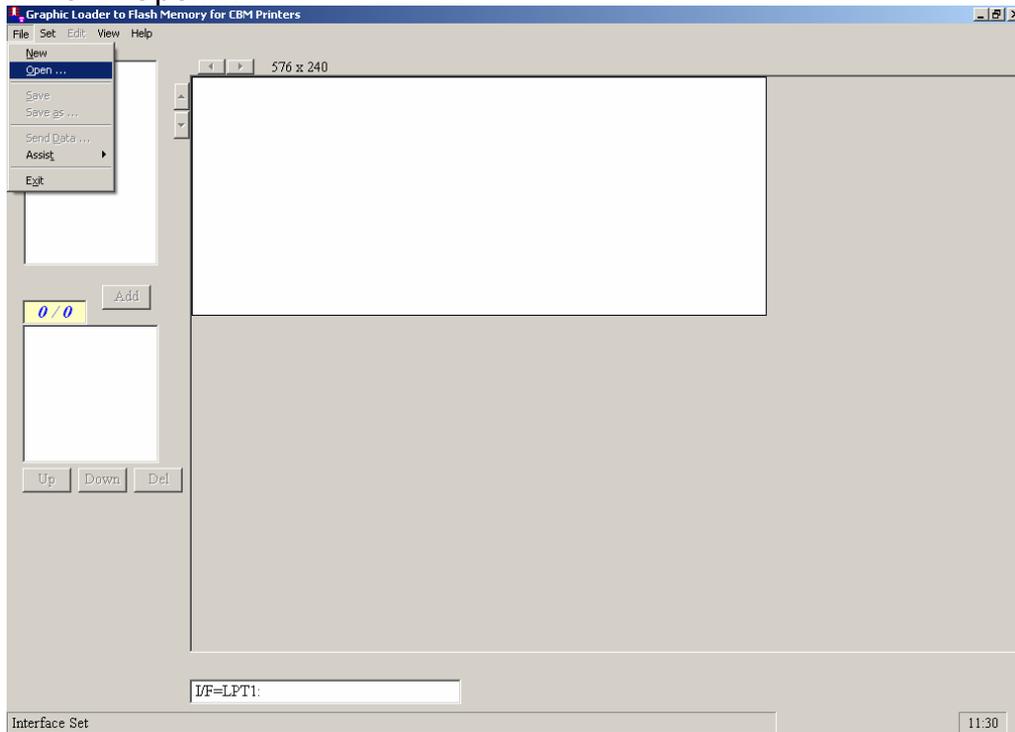


8. Select Logo image file.

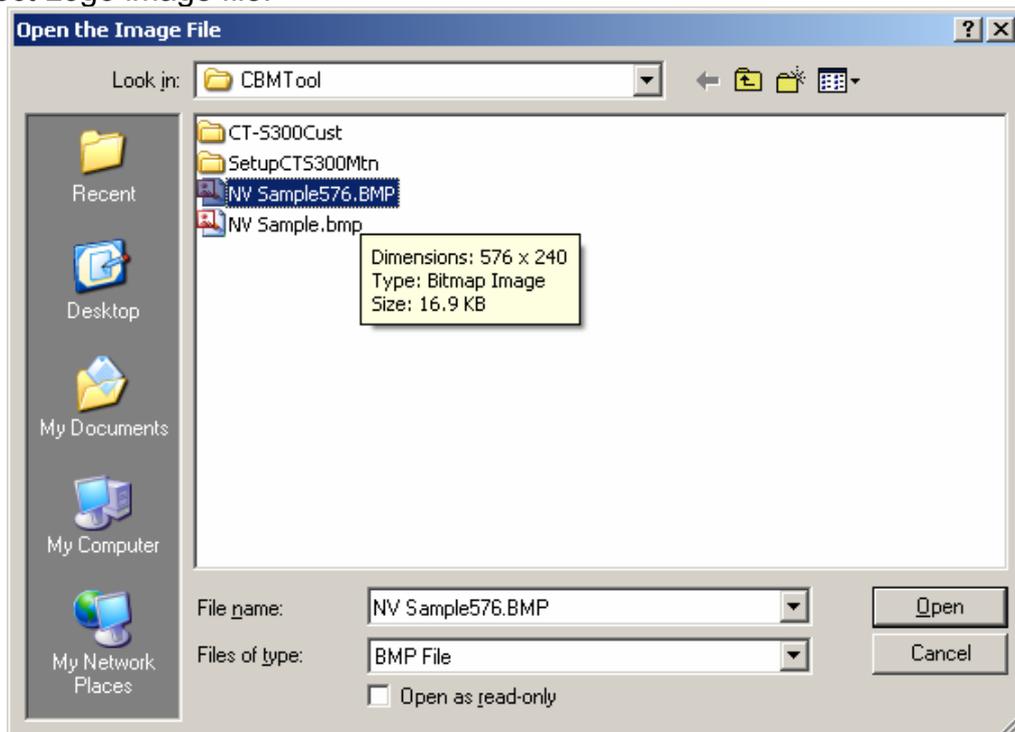


9. Then click "Open"

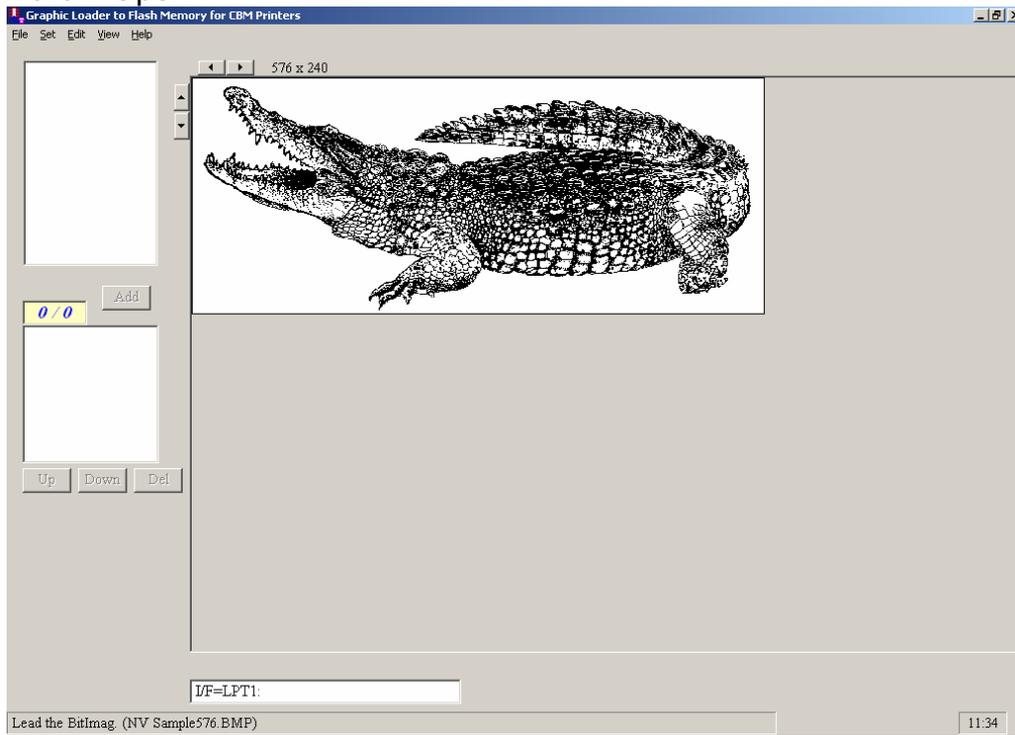


10. File → Save as...

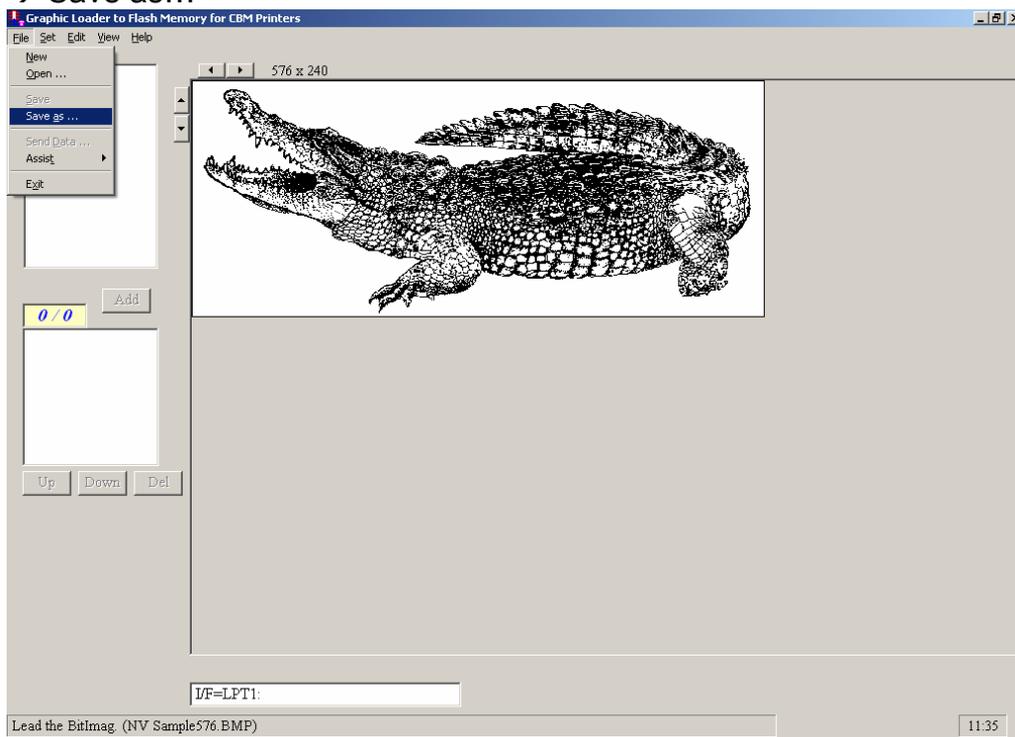


11. Enter NV image name you want to save to.

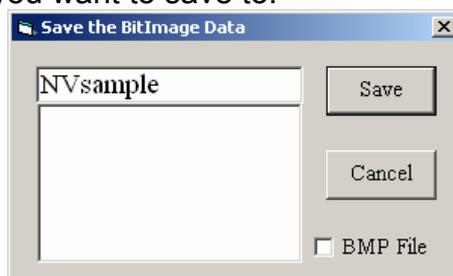

12. Then click “Save”

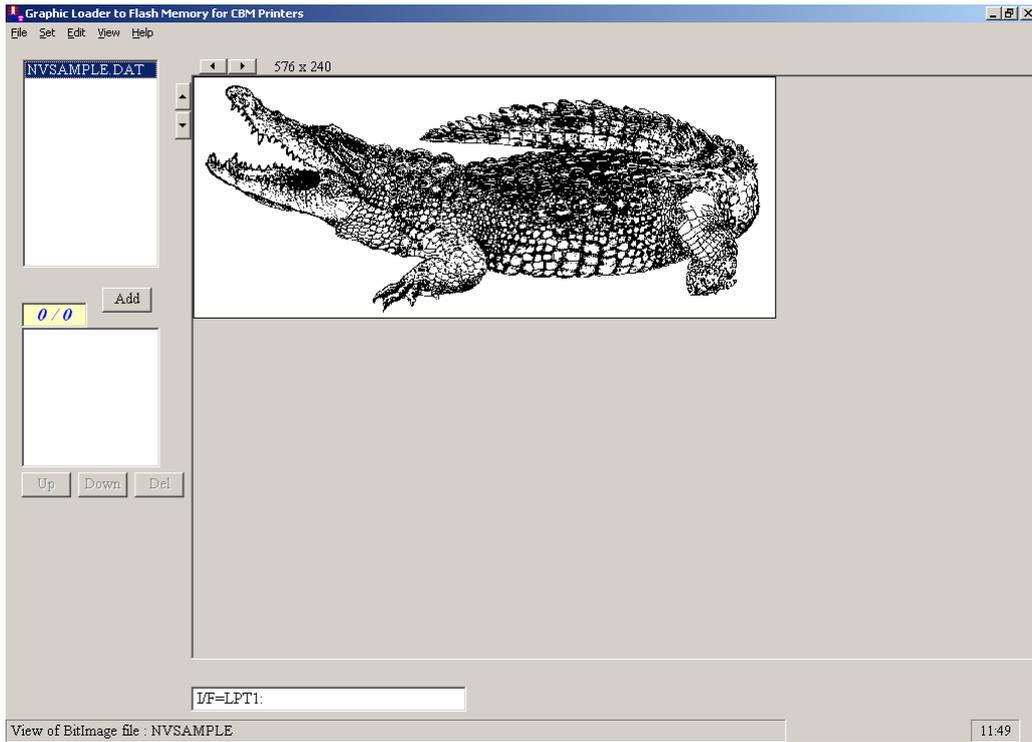


13. Hight the Logo you select, click “Add”

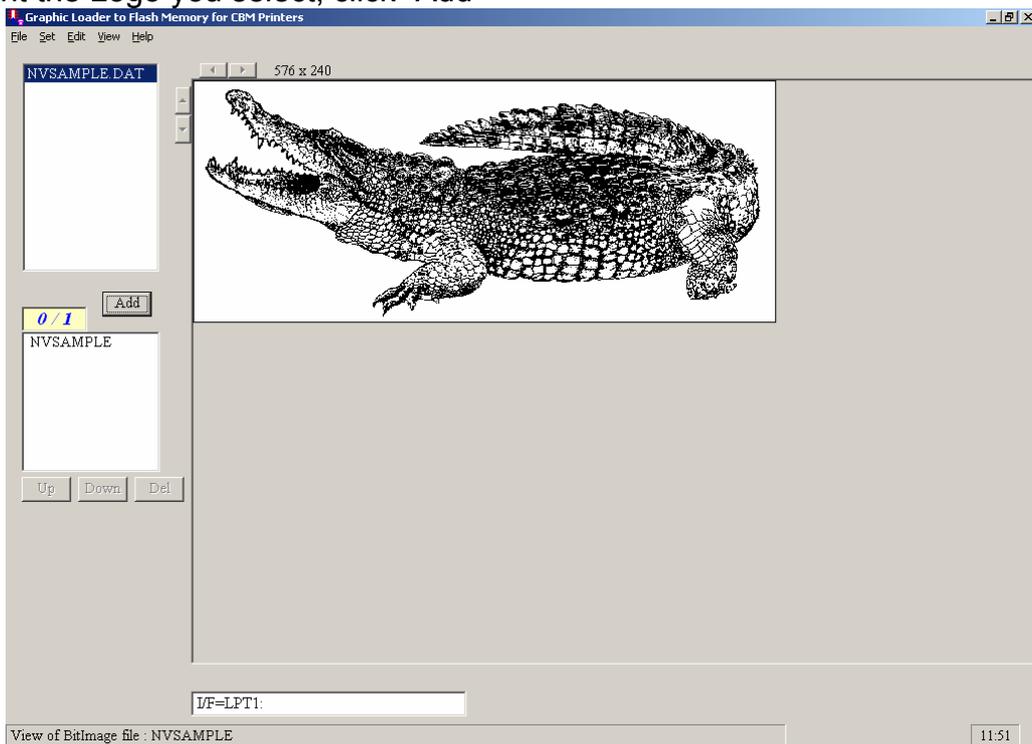


14. You can add more Logo images up to 256 images to the NV image memory, but it limited by images size.

15. After add all images you want to the list, File → Send Data ...

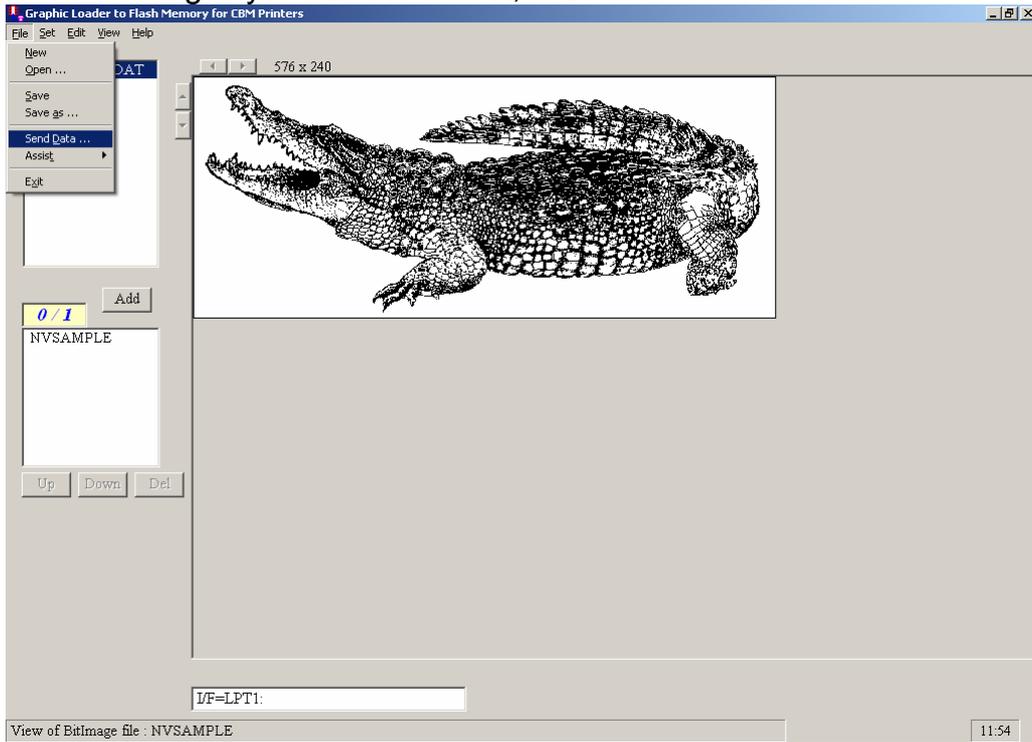

16. Check the Printer, then click “OK”

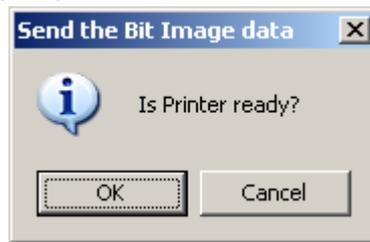

17. After Images loading finished, Printer should print out all images.

