

5. SERVICE PARTS LIST


5-1 Parts List for Mechanism

EXPLODED VIEW

Ref. No.	Parts No.	Description	Q'ty	Remarks
1	E 62010760	Top Case	1	
2	E 6200-620	Front Panel-T	1	
3	E 6200-630	Front Panel-B	1	
4	E 62020240	Shield Cover	1	
5	E 6611-590	Paper Holder BK	1	
6	E 6233-020	Knob	1	
7	E 6611-600	PE Support	1	
8	E 6233-050	Panel Shaft Roller	2	
9,10	E 6233-030	Panel Shaft	2	
11	E 4035-780	Insulation Sheet	1	
12	E 5200-270	OP Sheet	1	
15	E 4035-770	FG Cable	1	
16	E 40000140	OP PCB Assy	1	
	E 4900-360	Harness 920-7	1	
	E 5102-450	Tact SW. SKHHNH	2	
	E 480-330	LED SEL2110S	2	
17	E 40000150	PE PCB Assy	1	
	E 4900-400	Harness 920-5	1	
	E 391-180	Photo Interrupter GP2S07	1	
18	E 40000160	N-PE PCB Assy	1	
	E 4900-370	Harness 920-6	1	
	E 391-110	Photo Interrupter GP2S24	1	
19	E 4035-790	FG Plate	1	
20	MD910	Printer MD910-SS		
	MD911	Printer MD911-SS		
	E 4900-330	FPC SMCD-4x210	1	
	E 4900-340	FPC SMCD-6x240	1	
	E 4900-350	FPC SMCD-7x225	1	
21	E 70010870	Main PCB Assy CBM920-RF		
	E 70010880	Main PCB Assy CBM920-PF		
	E 6233-060	Mounting BRT	1	
	76G38641	Screw M3x12 for mounting BRT	2	
30	76G60124	Screw M2x6	1	
31	76G23670	Screw M2x6	2	
32	76G22839	Screw M2.6x8	6	

5-2 Disassembly Drawing

EXPLODED VIEW CBM920-PF/-RF

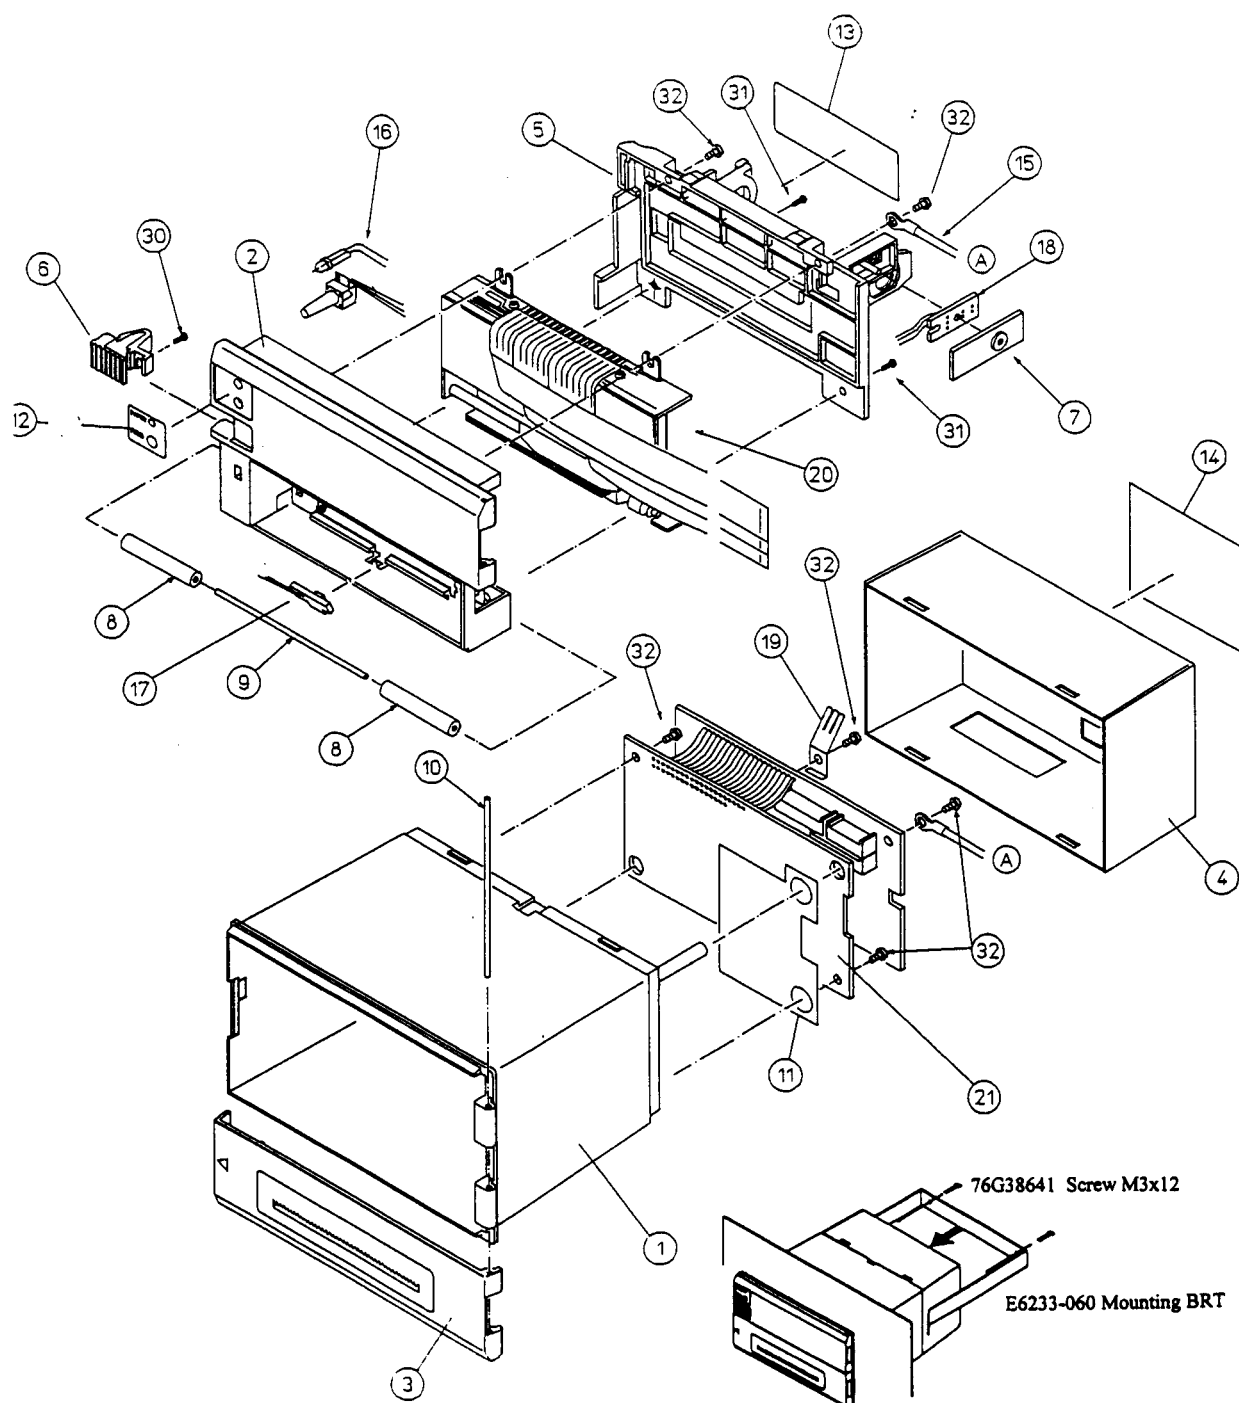

5-3 Parts List for Control Board

1/2

Ref. No.	Parts No.	Description	CBM-920-PF	CBM920-RF
IC 1	E 107-250	CPU uPD78C10AGF-3BE	1	1
IC 2	E 107-260	EP-ROM M27C256B-15F1	1	1
IC 3	E 107-320	S-RAM LC3564SM-70/75/10	1	1
IC 4,7	E 210-090	C-MOS TC74HC573AF	2	
IC 4	E 210-090	C-MOS TC74HC573AF		1
IC 5	E 202-910	Reset IC PST520F	1	1
IC 6	E 210-110	TTL NS74LS06F	1	1
IC 7	E 2010040	I/F IC MAX232CPE		1
IC 8	E 210-080	C-MOS TC74HC00AF	1	
IC 9	E 210-100	C-MOS TC74HC74AF	1	
TR 1	E 393-010	Transistor RN1002	1	1
TR 2-5	E 348-040	Transistor 2SC1740SR	4	4
TR 6	E 379-060	Transistor 2SD1802ST	1	1
TR 7	E 327-070	Transistor 2SB1202ST	1	1
TR 8	E 379-070	Transistor 2SD1817	1	1
TR 9	E 358-060	Transistor DTA143ES	1	1
TA 1,2	E 390-280	Tr. Array TD62308AF	1	1
DA 1	E 400-590	Diode Array MC-921	1	1
OSC 1	E 501-380	X'tal CST11.0MTW	1	1
DS 1	E 5103-510	Dip Switch KSD-08	1	1
DS 2	E 5103-530	Dip Switch KSD-05		1
BL 1	E 4009-510	Fe. Beads BL02RN1-R62	1	1
R 2,17,31	E 3900-500	Chip Re. CR10-102J	3	3
R 3,4,14-16,29	E 3900-510	Chip Re. CR10-103J	6	
R 3,4,14-16	E 3900-510	Chip Re. CR10-103J		5
R 5,9	E 3900-520	Chip Re. CR10-181J	2	2
R 6,10,21,23 25,27	E 3900-560	Chip Re. CR10-683J	6	6
R 7,11	E 3900-490	Chip Re. CR10-101J	2	2
R 8,12,13,22 24,26,28	E 3900-550	Chip Re. CR10-333J	7	7
R 18	E 3900-540	Chip Re. CR10-332J	1	1
R 19,20,30	E 3900-530	Chip Re. CR10-221J	3	
R 19,20,30	E 3900-530	Chip Re. CR10-221J		2

2/2

Ref. No.	Parts No.	Description	CBM920-PF	CBM920-RF
CA 1	E 2000-090	Ca. Array CGSD8x101M	1	1
C 1,6,7	E 2600-050	Chip C. Cap. GRM40F103Z50	3	3
C 2-5,8,18,19	E 2600-090	Chip C. Cap. GRM40B471K50	7	
C 2-5,8-18	E 2600-090	Chip C. Cap. GRM40B471K50		6
C 9,14,16,24	E 2600-120	Chip C. Cap. GRM40F104Z25	4	4
C 10	E 2010-860	El. Cap. 25JS-10uF	1	
C 10,19,22,23	E 2010-860	El. Cap. 25JS-10uF		4
C 13	E 2010-890	El. Cap. 50JS-1uF	1	1
C 15	E 2010-870	El. Cap. 10MR-100	1	1
C 17	E 2010-880	El. Cap. 10MR-1000 10x15	1	1
C 20,21	E 2010-900	El. Cap. 25JS-4.7uF		2
C 25	E 2122-060	C. Cap. DD104-63B222K50	1	1
PC 1-9	E 2600-120	Chip C. cap. GRM40F104Z25	9	
PC 1-7	E 2600-120	Chip C. cap. GRM40F104Z25		7
RA 1	E 3500-220	Re. Array M7-1-473J	1	
RA 1,4	E 3500-220	Re. Array M7-1-473J		2
RA 2	E 3500-050	Re. Array M5-1-103J	1	
RA 2,5	E 3500-050	Re. Array M5-1-103J		2
RA 3	E 3500-210	Re. Array M6-3-471J	1	1
RA 4	E 3500-090	Re. Array M7-1-103J	1	
RA 5	E 3500-040	Re. Array M9-1-103J	1	
RA 6,7	E 3500-110	Re. Array M8-3-472J	2	
CN 1	E 48000735	Connector HIF3F20PA-2.54DS	1	1
CN 2	E 48000740	Connector 5229-04CPB	1	1
CN 3	E 48000745	Connector 5229-06CPB	1	1
CN 4	E 48000750	Connector 5229-07CPB	1	1
CN 5	E 48000755	Connector 53014-0310	1	1
CN 6	E 48000760	Connector 53014-0410	1	1
CN 7	E 48000765	Connector 53014-0510	1	1
JL 1	E 51060010	Wire Array KJL-1	2	2
JL 2	E 51060020	Wire Array KJL-1	2	2
J 1,3	E 3900-480	Chip Re. CR10-000J	2	
J 1,2	E 3900-480	Chip Re. CR10-000J		2