

Service Manual

COMPACT LINE THERMAL PRINTER CT-S651 Series

Revision 1.00 2010.3.29

CITIZEN SYSTEMS JAPAN CO., LTD.

REVISIONS

Rev No.	Date	Page	Comment
1.00	2010/3/29		Newly issued

CITIZEN is a registered trademark of CITIZEN HOLDINGS CO., LTD., Japan.

CITIZEN es una marca registrada de Citizen Holdings Co., Japón.

CONTENTS

INTRODUCTION	4
1. DISASSEMBLY AND REASSEMBLY	4
1-1. Tools Used	4
1-2. Disassembly Procedure	5
1-2-1. Disassembling the Printer	5
1-2-2. Disassembling "UNIT, MECHANISM"	14
1-3. Assembly Procedure	23
1-4. Oiling	24
2. TROUBLESHOOTING	27
2-1. Error Indication	27
2-2. Explanations of Error Conditions	29
2-2-1. Paper Near End	29
2-2-2. Paper End	29
2-2-3. Front Cover Open	29
2-2-4. Paper Cover Open	29
2-2-5. Cutter Error	29
2-2-6. Print Head Hot	29
2-2-7. Memory Error	29
2-2-8. System Error	29
2-2-9. Low Voltage Error	30
2-2-10. High Voltage Error	30
2-2-11. Drawer Voltage Error	30
2-2-12. Macro Execution Wait	30
2-3. Troubleshooting Procedure	31
2-4. Troubleshooting Guide	31
3. SERVICE PARTS LIST	35
3-1. Mechanical Parts List	35
3-1-1. Mechanical Exploded Diagrams	41
3-2. Parts Layout	48
3-2-1. SA, MAIN PCB	48
3-2-2. SA, OPEPANE PCB-651	50

3-2-3.	SA, SERIAL I/F PCB.....	50
3-2-4.	SA, PARALLEL I/F PCB.....	51
3-2-5.	SA, USB I/F PCB.....	51
3-2-6.	SA, USB HUB I/F PCB	52
3-2-7.	SA, POWERED USB I/F PCB	52
3-2-8.	SA, ETHERNET E Type I/F PCB	53
4.	CIRCUIT DIAGRAMS.....	54
4-1.	MAIN PCB	54
4-1-1.	Main Control Board (CPU1).....	54
4-1-2.	Main Control Board (CPU2/DAC)	55
4-1-3.	Main Control Board (ROM).....	56
4-1-4.	Main Control Board (RAM)	57
4-1-5.	Main Control Board (GATE_ARRAY).....	58
4-1-6.	Main Control Board (HEAD, OP-PANEL).....	59
4-1-7.	Main Control Board (PF MOTOR).....	60
4-1-8.	Main Control Board (SENSOR)	61
4-1-9.	Main Control Board (POWER/DRAWER/BUZZER).....	62
4-1-10.	Main Control Board (IF PCB CON / OPTION IF)	63
4-1-11.	Main Control Board (CUTTER).....	64
4-2.	PE, PNE Sensor	65
4-3.	Operation Panel	65
4-4.	Serial I/F PCB	66
4-5.	Parallel I/F PCB	67
4-6.	USB I/F PCB.....	68
4-7.	USB HUB I/F PCB	69
4-8.	POWERED USB I/F PCB	70
4-9.	ETHERNET E Type I/F PCB	71
4-9-1.	CPU1	71
4-9-2.	CPU2.....	72
4-9-3.	SD RAM.....	72
4-9-4.	PHY	73
4-9-5.	I/F	74

INTRODUCTION

This manual describes the disassembly, reassembly, and maintenance procedures of CT-S651 Series.

1. DISASSEMBLY AND REASSEMBLY

Note the following items when performing maintenance of the printer.

- Do not disassemble, reassemble, or adjust the printer unnecessarily when the printer operation is satisfactory.
- Do not loosen the screws that fasten the components unless it is absolutely necessary.
- After finishing inspection, perform a check to ensure that there is no irregularity before turning on the printer.
- Use caution not to leave any part or screw used for maintenance inside the printer.
- When handling the print head and electronic components, care must be taken to avoid static electricity.
- When disassembling or reassembling the printer, check the wires and cords for damage. Do not draw any wire or cord by force.
- Lubricate the components as necessary when reassembling them.

1-1. Tools Used

- Phillips screwdriver #0, #1, and #2
- Tweezers
- Long-nose pliers
- Brush

1-2. Disassembly Procedure

1-2-1. Disassembling the Printer

1. Disassembling "UNIT, I/F PCB"

Remove two "SCREW, BHT (ST), M3.0 × 6" that fasten "FRAME, BOTTOM" and "UNIT, I/F PCB".




2. Disassembling "SA, COVER-02"

Push "KNOB, COVER OPEN -02" upward and open "SA, COVER-02".





Remove three "SCREW, BHT (PT), M3.0 × 10" and remove "SA, COVER-02" from "COVER, FRAME".

Hold "HOLDER, DAMPER PAPER-02" by hand until two screws come into view, and remove the two screws.

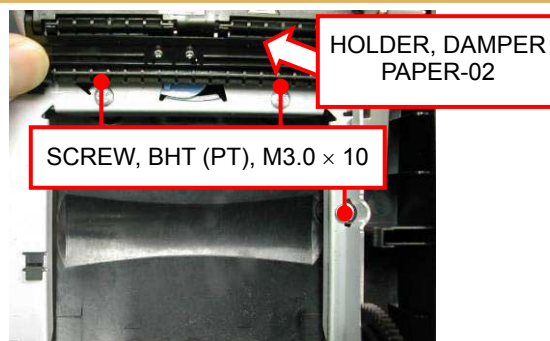

Since "SA, COVER-02" is secured with hooks and the boss, it cannot be removed easily when it is fully opened. To remove "SA, COVER-02", slightly close it by hand, raise its front edge, and slide it backward.

When mounting "SA, COVER-02", align the boss with the hole at "COVER, FRAME" and slide "SA, COVER-02" upward with hooks inserted into "COVER, FRAME".

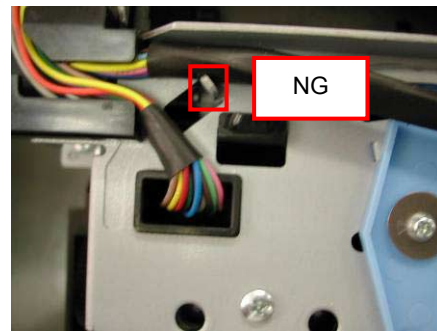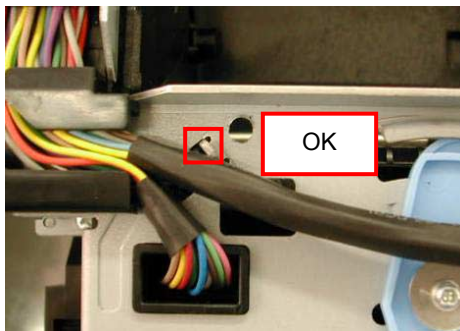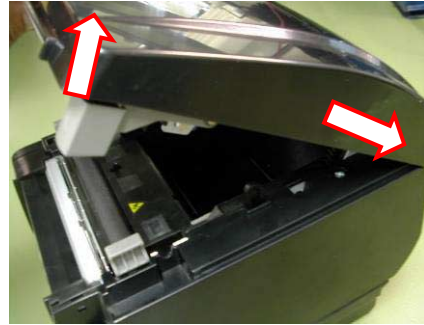
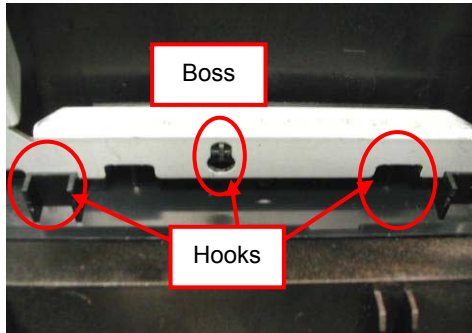


<Precaution at disassembly / reassembly>

The hooks and the boss at "SA, COVER-02" are engaged on "FRAME, COVER". Carefully disassemble or reassemble the components so as not to damage them. Check the routing of "SA, HEAD CABLE-02".

3. Disassembling "SA, HEAD COVER"

Detach the lugs from the notches at the right and left sides of "COVER, FRAME", and move down "SA, HEAD COVER" and pull it out with care so as not to damage the lugs.

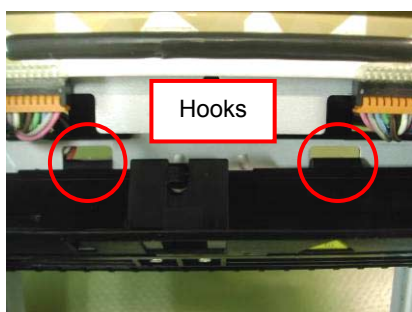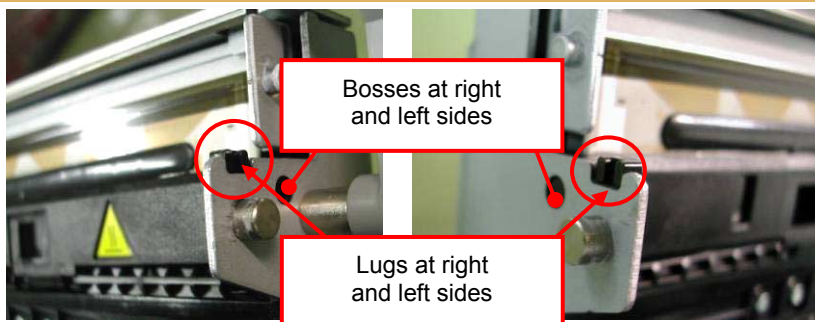





<Precaution at reassembly>

Hang the hooks at "SA, HEAD COVER" on "COVER, FRAME" and raise "SA, HEAD COVER" using these hooks as fulcrums. Let the bosses at the right and left sides of "SA, HEAD COVER" fit into the holes at "COVER, FRAME", and engage the lugs to secure "SA, HEAD COVER".

4. Disassembling "SA, THERMAL HEAD-02"

Move down "HOLDER, HEAT SINK-02" by pressing the edges at the right and left sides. "SA, THERMAL HEAD-02" is detached from lugs at "COVER FRAME".

Pull "SA, THERMAL HEAD-02" out from "SHAFT, HEAD ADJUST-2" along the U-slot, and disconnect "HEAD CABLE" from two positions.

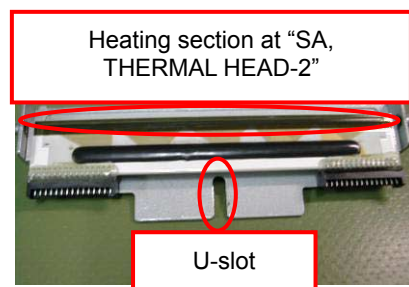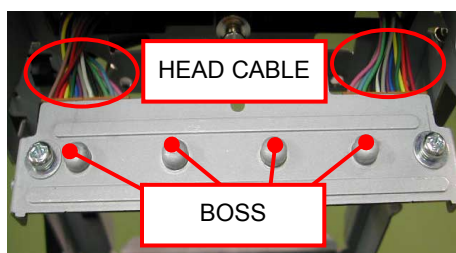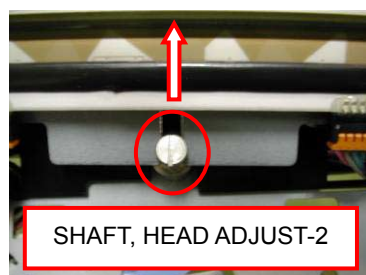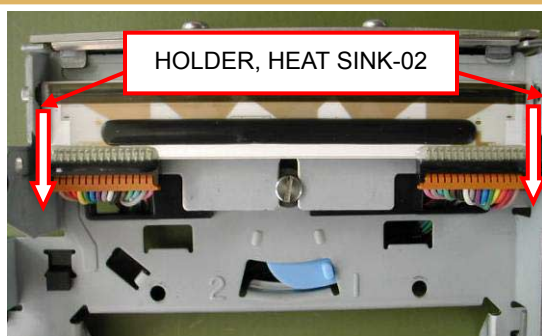




<Precaution at reassembly>

"SA, THERMAL HEAD-02" is electrostatically sensitive. Avoid contacting the heating section.

When reassembling, insert the U-slot into "SHAFT, HEAD ADJUST-2", and let the bosses fit into "SPRING, HEAD-02". Press the both sides at "HOLDER, HEAT SINK-02" and engage the lugs at "COVER, FRAME" on "HOLDER, HEAT SINK-02".



5. Disassembling "SA, PLATEN UNIT-02"

Raise "HANDLE, PLATEN-02" on both sides, and pull "SA, PLATEN UNIT-02" out from "SA, MAIN FRAME".

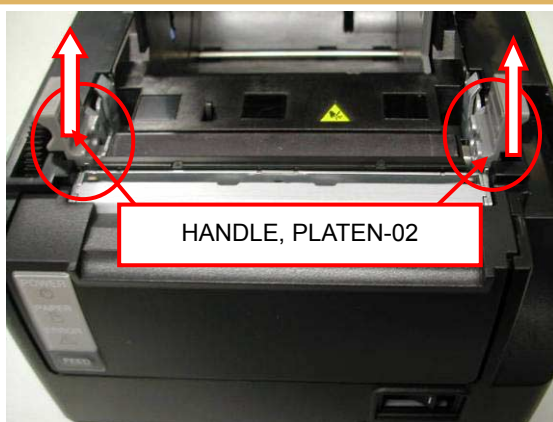

6. Disassembling "SA, CUTTER UNIT-02"


Push "PIN, FRONT COVER" at the right side of "SA, CASE-02" using a sharp-pointed tool. Raise "FRONT COVER-02" and flip it down toward you to open it. When "LEVER, CUTTER RELEASE-02" at the right and left sides are pushed down, "SA, CUTTER UNIT" pops out. Pull it out upwardly and disconnect cables from the connector.

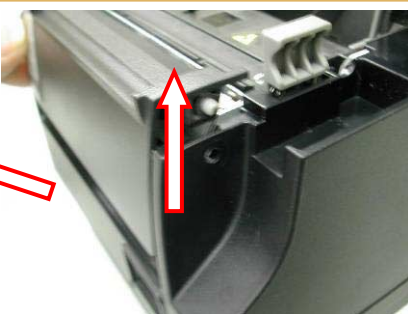

7. Disassembling "SA, FRONT COVER-02"

Remove two "SCREW, BHT (ST), M3.0 × 6" that fasten "SA, FRONT COVER-02" and "SA, MAIN FRAME" and disconnect "SA, OPEPANE CABLE F" from the connector.

Remove "HOLDER, FRONT COVER-02" from "SA, FRONT COVER-02".

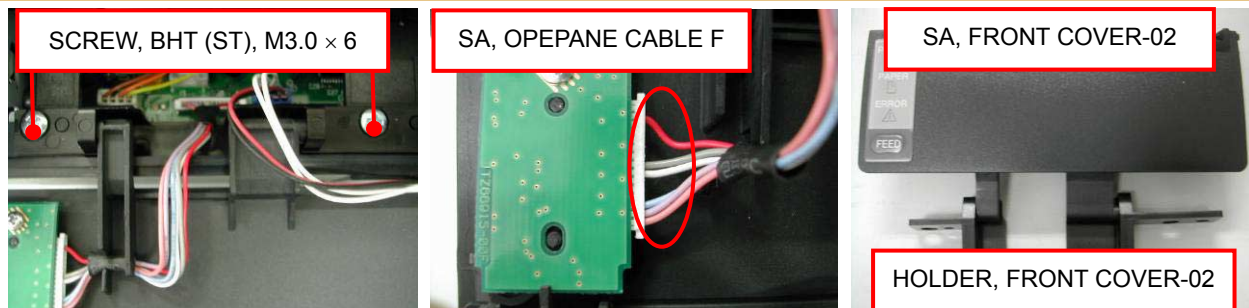


Remove "HOLDER, FRONT COVER-02" while pulling its side edge outwardly.




8. Disassembling "SA, CASE-02"

Remove two "SCREW, BHT (ST), M3.0 × 6" that fasten "SA, CASE-02" and "SA, MAIN FRAME".

Raise the front edge of "SA, CASE-02" while slightly pressing "POWER SW" at the front.

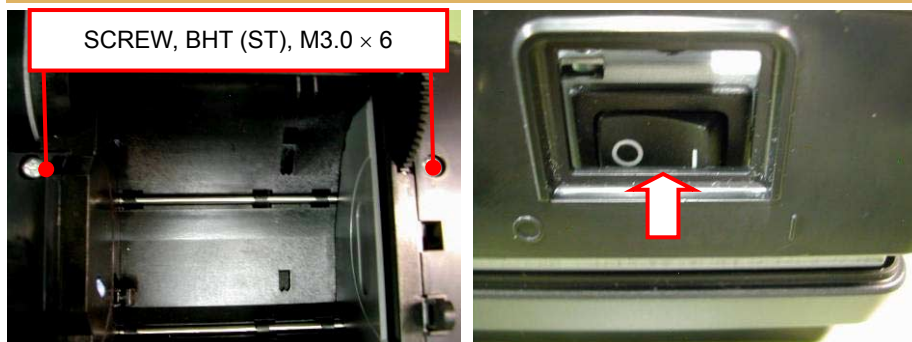

Close "SA, COVER FRAME" slightly, and raise "SA, CASE-02" while pulling the right and left edges of "SA, CASE-02" outwardly. When "SA, CASE-02" is raised slightly, release "SA, COVER FRAME" and raise "SA, CASE-02" further while pulling the right and left edges outwardly and keeping the lugs at the rear clear of "FRAME, BOTTOM".

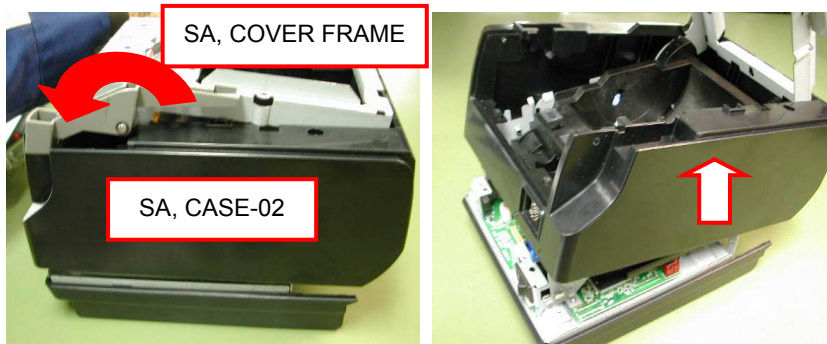



Raise "SA, CASE-02" along "SA, COVER FRAME". When "SA, CASE-02" is raised to the position indicated in the photo below, turn it counterclockwise and pull it upwardly to remove it.



<Precaution at disassembly / reassembly>

Do not assemble or disassemble "SA, CASE-02" by force. When removing "SA, CASE-02", raise it little by little. When reassembling, follow the disassembly procedure in reverse. Face the front panel of "SA, CASE-02" to the right, pass it through "SA, COVER FRAME", and turn it clockwise. When the front faces toward you, pull the right and left panels of "SA, CASE-02" outwardly and keep the lugs at the rear clear of "FRAME, BOTTOM". Push "SA, CASE-02" downward while closing "SA, COVER FRAME".


Remove "SA, OPEPANE CABLE-F" and "SA, CUTTER CABLE".

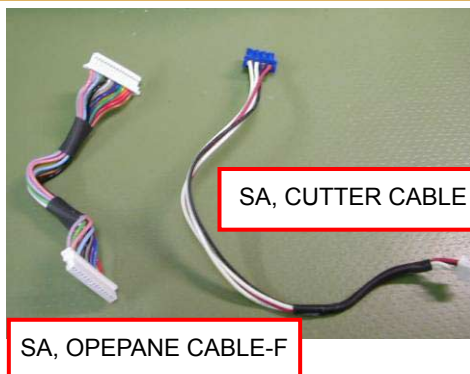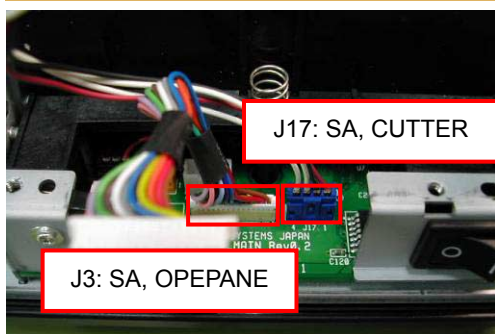

9. Disassembling "COVER, ADAPTER"

Remove four "SCREW, BHT (ST), M3.0 × 6" that fasten "COVER, ADAPTER" and "FRAME, BOTTOM".

Remove the AC adaptor cable from the power connector.
(Note that this connector is of the lock type.)

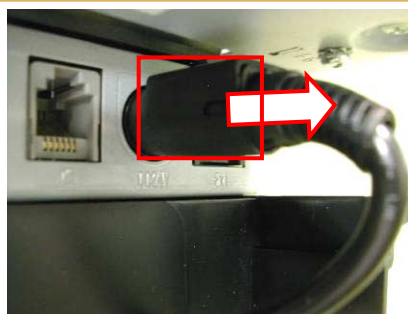





<Precaution at disassembly / reassembly>

The power connector is a lock-type connector. Unlock the connector by pulling the outer slide at the end of the connector to disconnect the cable. When fitting the connector, insert it until it clicks and ensure that it cannot be removed easily.

10. Disassembling "FRAME, BOTTOM"

Remove four "SCREW, BHT (ST), M3.0 × 6" that fasten "FRAME, BOTTOM" and "SA, MAIN FRAME".

Detach the lower lugs and raise "FRAME, BOTTOM". Slide "FRAME, BOTTOM" upward to detach upper lugs from "SA, MAIN FRAME".

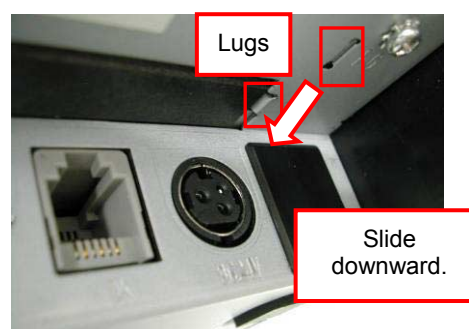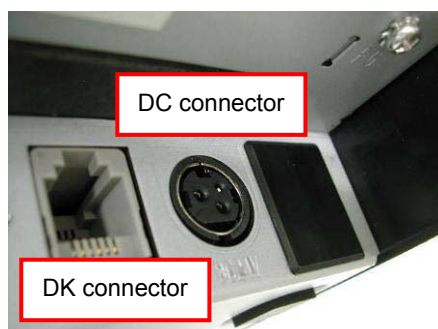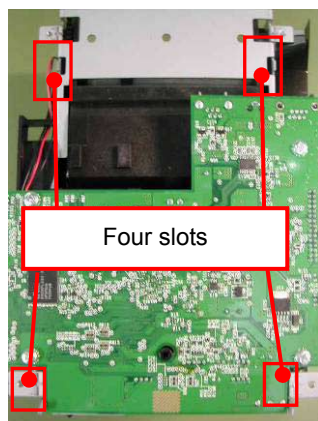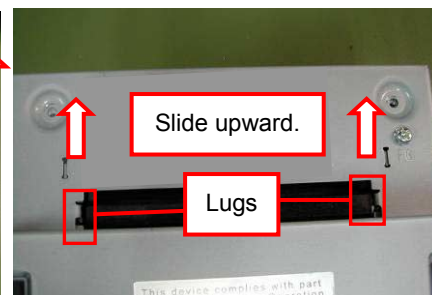

<Precaution at disassembly / reassembly>




When dismantling or mounting "FRAME, BOTTOM", be careful not to damage the DC connector and DK connector. When mounting "FRAME, BOTTOM", align the lugs with four slots, at which "FRAME, BOTTOM" is to be secured, slide it downward to engage the lugs, and fasten it with screws.

Be careful not to allow connectors to interfere with each other in order to prevent deformation.

11. Disassembling "UNIT, MAIN PCB"



Remove four "SCREW, BHT (ST), M3.0 × 6" that fasten "UNIT, MAIN PCB" and "SA, MAIN FRAME".

Remove one "SCREW, BHT (ST), M3.0 × 6" that fastens "COVER, CABLE PROTECT-02" at the right side, and disconnect the connector of "COVER OPEN SENSOR".

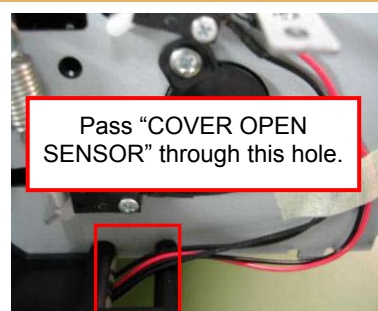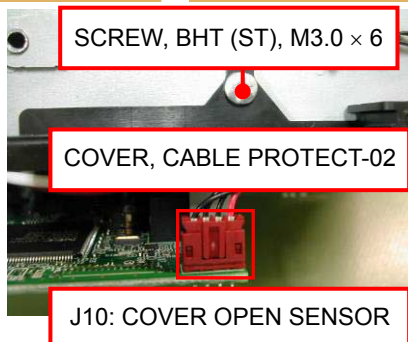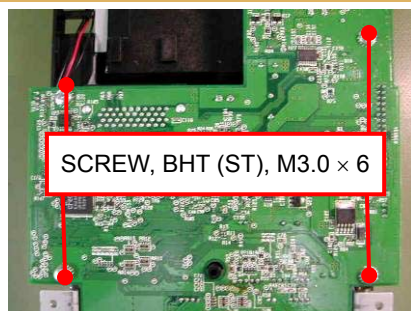


Disconnect the connectors of "SA, HEAD CABLE-02" and "SA, PNE SENSOR" at the left side.

Disconnect the connector of "SA, POWER SW" at the rear.

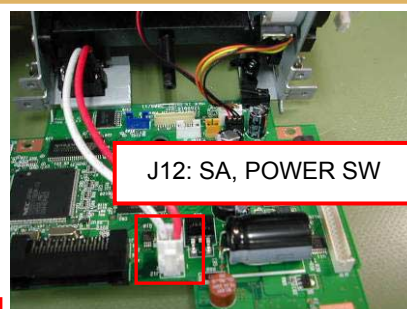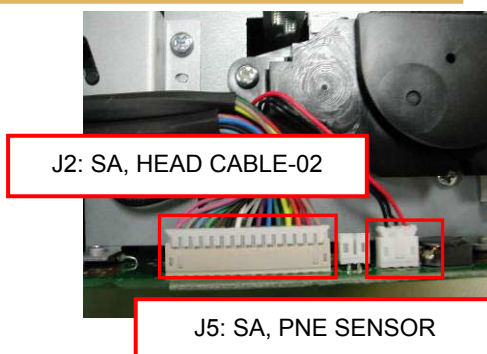

Disconnect the connectors of "SA, PE SENSOR" and "UNIT, MOTOR" at the front, and remove "UNIT, MAIN PCB".

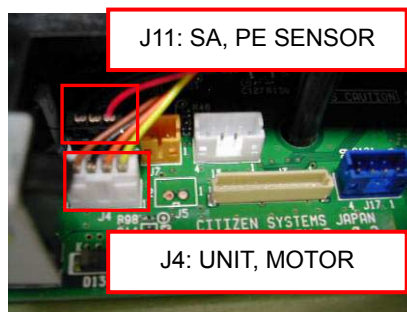


<Precaution at reassembly>

Connectors are provided at the right, left, and front sides. Be careful not to pull these cables by force. When reassembling, be careful not to miss or catch any part, such as "FRAME". Before disassembling record the cable routing. When reassembling, reconnect the cables correctly. Pass "CABLE" of "COVER OPEN SENSOR" through the hole on "COVER, CABLE PROTECT-02" and secure it.

1-2-2. Disassembling “UNIT, MECHANISM”

1. Disassembling “SA, COVER OPEN SENOR - F”

Remove two “SCREW, No. 0 PHT (BT#3), M1.7 × 7” that fasten “SA, MAIN FRAME” and “SA, COVER OPEN SENSOR” (2 pcs), as well as the tape that secures “CABLE”.

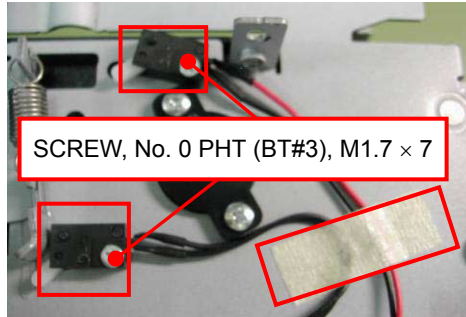


<Precaution at reassembly>

When reassembling, align the “SA, COVER OPEN SENSOR” switch with the hole at “FRAME, MAIN”, and secure it with one screw.

Do not forget to attach a tape to secure the cable.

2. Disassembling “GEAR DAMPER”

Remove two “SCREW, BHT (ST), M2.0 × 4” that fasten “SA, MAIN FRAME” and “GEAR, DAMPER”.

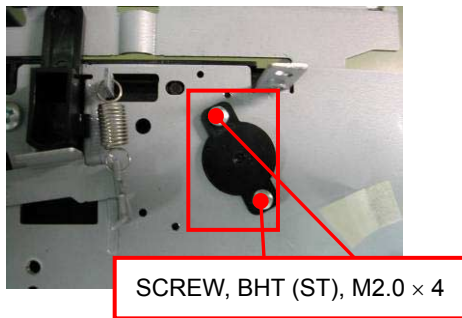



<Precaution at disassembly / reassembly>

The unit can be mounted in either orientation.

This part is not compatible with the one for CT-S801.

3. Disassembling “GEAR REDUCTION”

Remove “SCREW, PHT (#2), M3.0 × 8” and “SCREW, PHT (ST), M3.0 × 6” that fasten “SA, MAIN FRAME” and “COVER, GEAR-02”, and remove “GEAR REDUCTION” from “COVER, GEAR-02”.

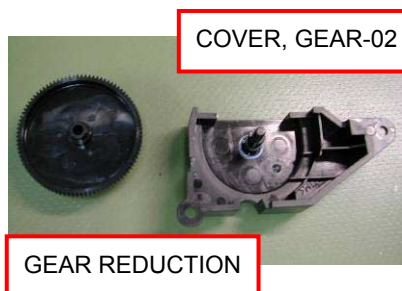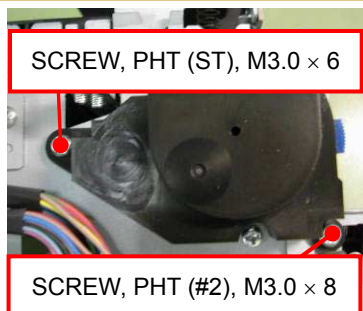


<Precaution at disassembly / reassembly>

If the screws are tightened excessively when reassembling, “COVER, GEAR” will be damaged. Be careful not to tighten them excessively.

4. Disassembling "UNIT, PNE-02"

Remove two "SCREW, PHT (#2), M3.0 × 8" that fasten "SA, MAIN FRAME" and "PLATE, PNE SENSOR-02", and remove "SA, HEAD CABLE-F" from the hook. Remove "PLATE, PNE SENSOR-02", and then remove "UNIT, PNE -02".

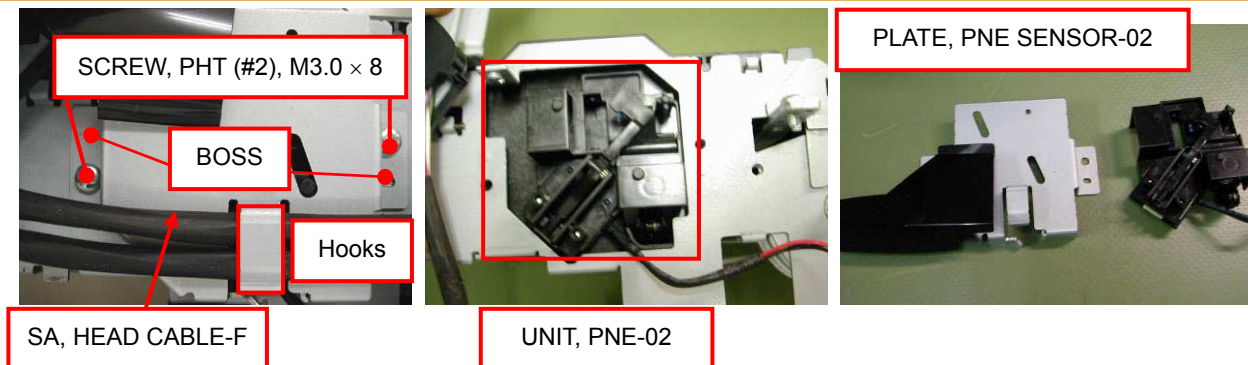

<Precaution at disassembly / reassembly>

Align two holes at "PLATE, PNE SENSOR-02" with the bosses at "SA, MAIN FRAME" and secure them with screws.

5. Disassembling "SA, PAPER HOLDER-02"


Remove four "SCREW, BHT (BT), M3.0 × 6" that fasten "SA, MAIN FRAME" and "SA, PAPER HOLDER-02".



<Precaution at disassembly / reassembly>

Remove one screw from the left rear and three screws from the right.

Raise the rear of "SA, PAPER HOLDER-02" while pulling "GEAR, COVER DAMPER" outwardly, and detach the bosses from the slot at "SA, MAIN FRAME".


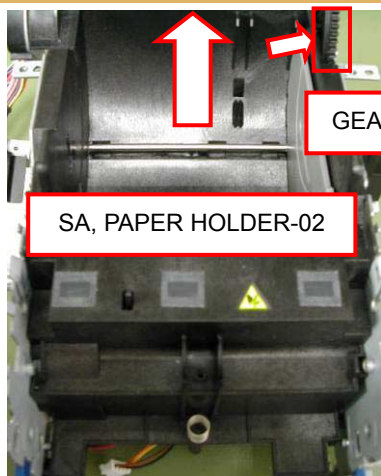


GEAR, COVER DAMPER

SA, PAPER HOLDER-02




When removing "SA, PAPER HOLDER-02", pull it upward while keeping it clear of the bosses at "SA, MAIN FRAME" and the bent section at the front.

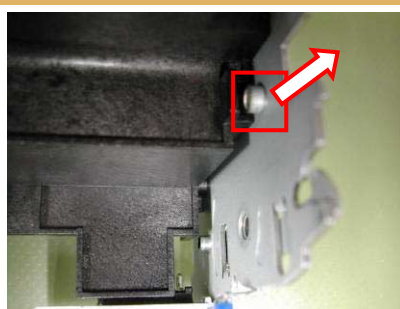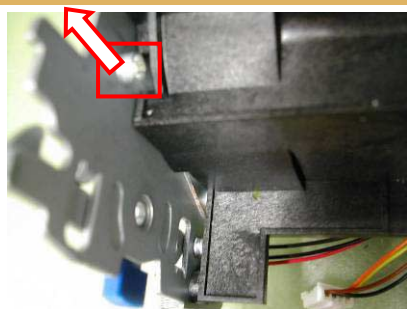

Keep clear of these four sections.


<Precaution at reassembly>

When reassembling, align the bosses at "SA, PAPER HOLDER-02" with the slot at "SA, MAIN FRAME".

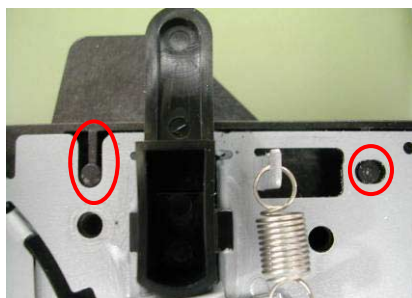

6. Disassembling “SA, PE SENSOR”

Remove two “SCREW, PHT (BT), M2.0 × 6” that fasten “SA, PAPER HOLDER-02” and “SA, PE SENSOR”.

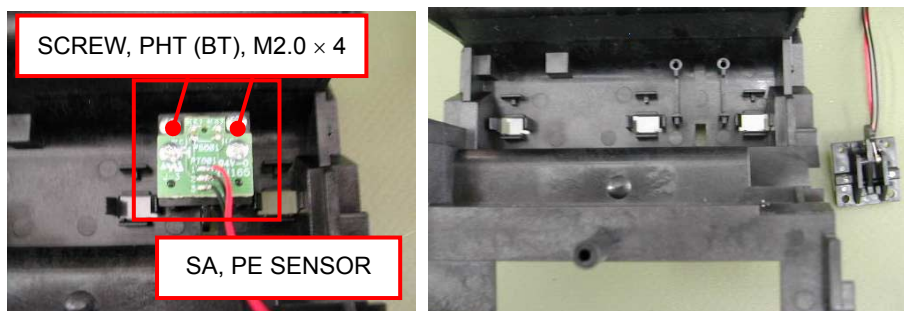

7. Disassembling “SA, FRAME COVER UNIT-02”


Remove “WASHER, PLATEN” that fastens the hinged section at “SA, FRAME MAIN” to “SA, FRAME, COVER” and “GEAR, COVER DAMPER”, and remove “GEAR, COVER DAMPER”.



<Precaution at reassembly>

When reassembling, align “GEAR, COVER DAMPER” with the shaft at “FRAME, MAIN” and the boss at “FRAME, COVER”.

Remove "WASHER, PLATEN" from the "COVER, CABLE-02" side, and remove "SA, FRAME COVER UNIT-02" from the hinged section at "SA, MAIN FRAME". When removing "SA, FRAME COVER UNIT-02", make sure that "SA, FRAME COVER UNIT-02" is opened and that no load is applied to "SPRING, COVEROPEN-02".

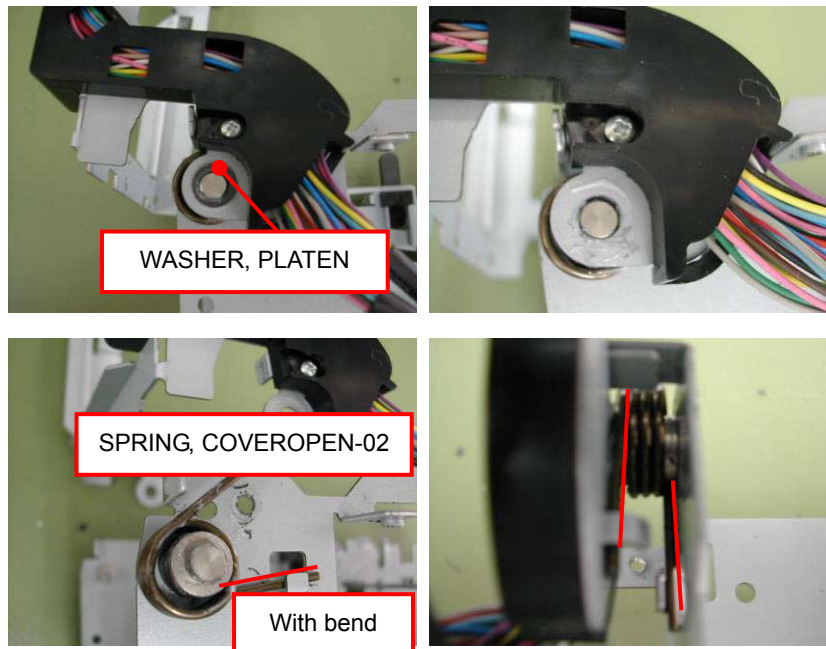


<Precaution at disassembly / reassembly>


When reassembling, check the orientation of "SPRING, COVEROPEN-02". Attach the bent side to the hook at the "SA, MAIN FRAME" side, and attach the other side to the hook at the "SA, FRAME COVER UNIT-02" side.

8. Disassembling "COVER, CABLE-02"

Remove "SCREW, PHT (ST), M2.0 × 4" that fastens "SA, FRAME COVER UNIT-02" and "COVER, CABLE-02", and slide "COVER, CABLE-02" sideways to detach the hooks. Then pull out "COVER, CABLE-02".

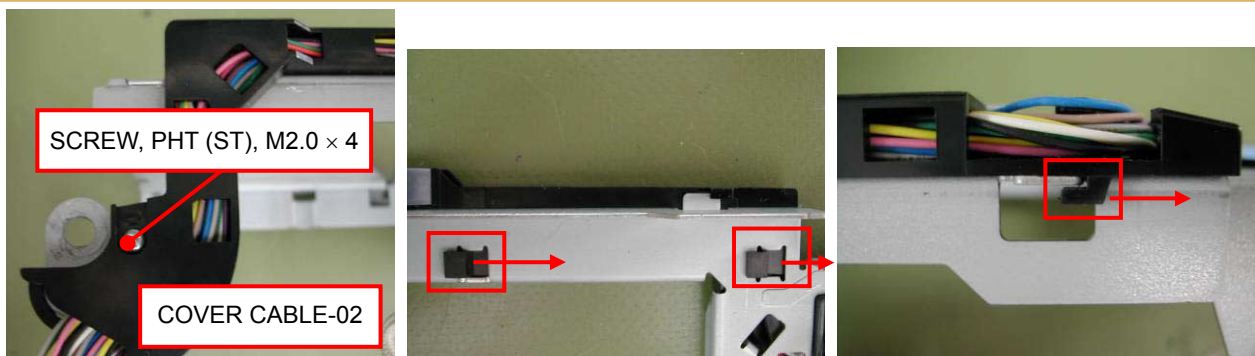

Remove "SA, HEAD CABLE-02" from "COVER, CABLE-02".

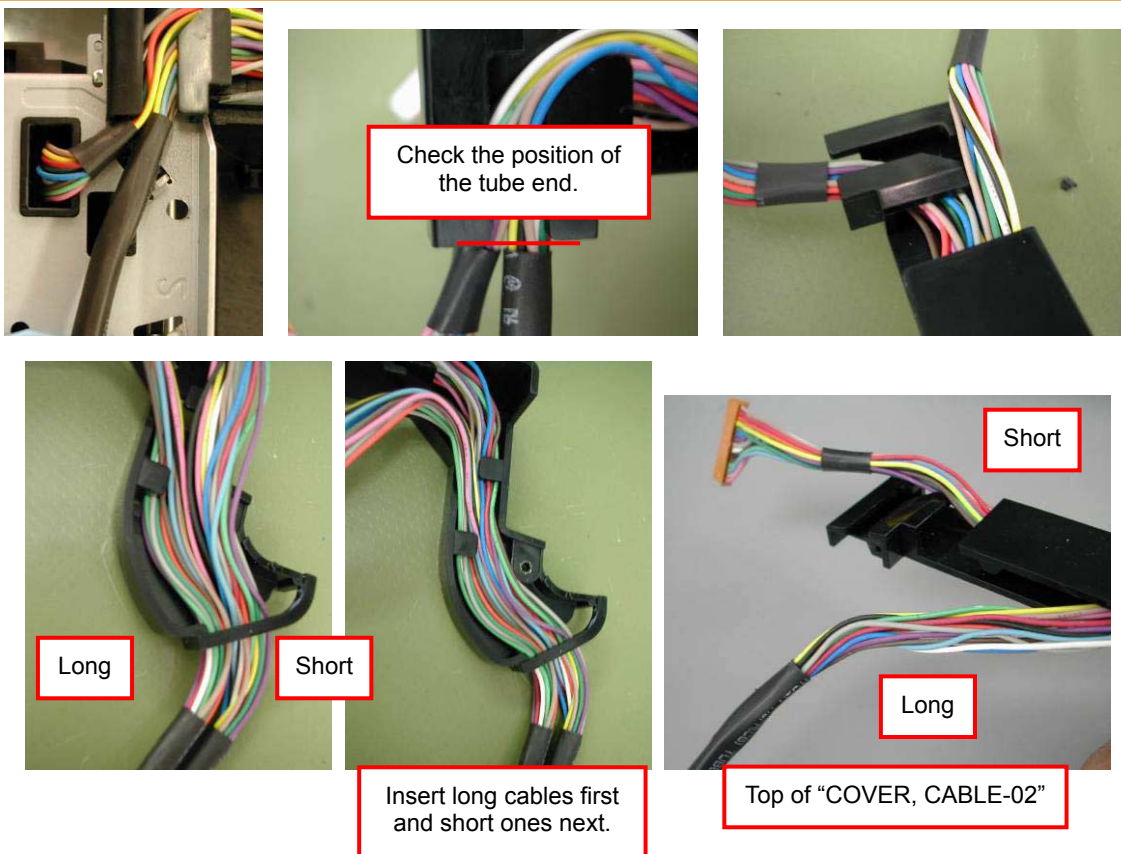

<Precaution at reassembly>

When reassembling, insert long cables into the left side of "SA, HEAD CABLE-02" at first, and then short ones into the right side.

Insert "CABLE" into the inside under the hooks. At the top of "COVER, CABLE-02", route the short cables to the back and long ones to the front. Adjust the length of the tube to align its end with the edge at "COVER, CABLE-02".

9. Disassembling "KNOB, COVER OPEN-02"

Remove "POLYSLIDER, KNOB-02" that fastens "SA, FRAME COVER UNIT-02" and "KNOB, COVER OPEN-02", pull "KNOB, COVER OPEN-02" out from the shaft, and detach "SPRING, COVER OPEN KNOB-02" from "SA, FRAME COVER UNIT-02".




<Precaution at reassembly>

When reassembling, attach the spring to the hooks and insert it into the shaft at "SA, FRAME COVER UNIT-02".

10. Disassembling "PLATE, FIX BLADE"

Remove two "SCREW, PHT (ST, SW + PW), M3.0 × 6" that fasten "FRAME COVER UNIT-02", "PLATE, FIXED BLADE" and "GUIDE, PAPER-02".

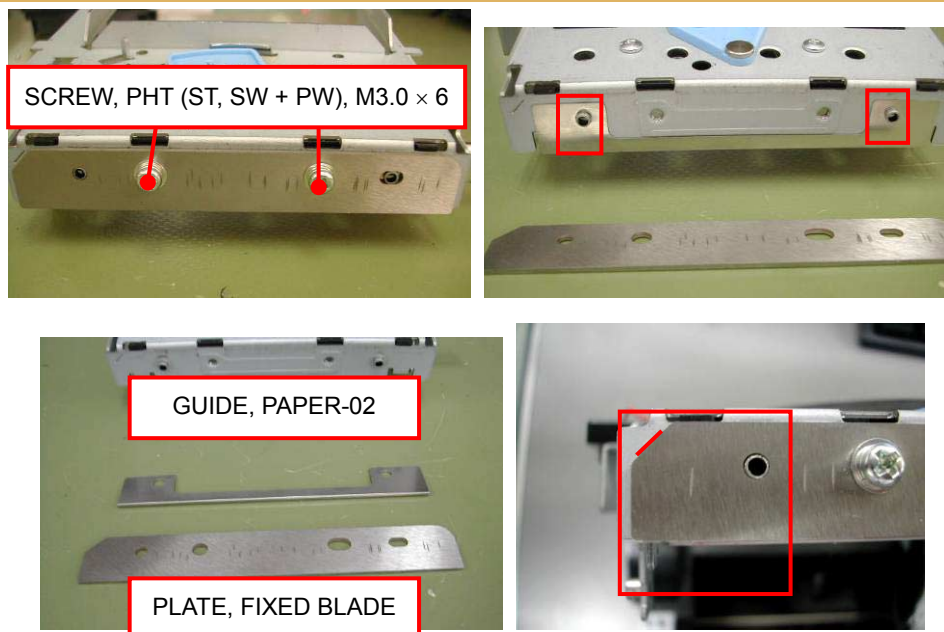

<Precaution at reassembly>

When reassembling, align "GUIDE, PAPER-02" with the boss at "SA, FRAME COVER UNIT-02".

Keep the chamfered side of "PLATE, FIXED BLADE" at the left so that the alignment mark at "SA, FRAME COVER UNIT-0" can be seen.

11. Disassembling "GUIDE, HEAD HOLDER-02"

Remove three "SPRING, HEAD-02" from "SA, FRAME COVER UNIT-02".




<Precaution at disassembly / reassembly>

The photo shows the position for the 3-inch model. "2" marked on "GUIDE, HEAD HOLDER" indicates the position for the 2-inch model, and "3" indicates the one for the 3-inch model.



Insert the spring into the boss at "SA, FRAME COVER UNIT-02" and check that the spring cannot be removed even if it is pulled lightly.

Remove two "SCREW, BHT (BT), M2.6 × 6" that fasten "SA, FRAME COVER UNIT-02" and "GUIDE, HEAD HOLDER-02".

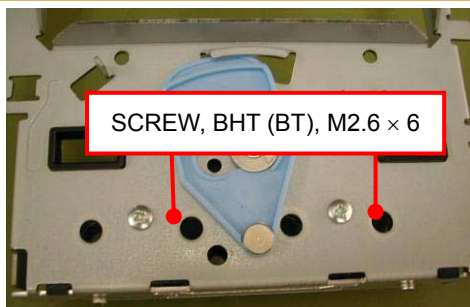



12. Disassembling "UNIT, MOTOR"

Remove "SCREW, PHT (ST), M3.0 × 6" that fastens "SA, MAIN FRAME" and "UNIT, MOTOR".

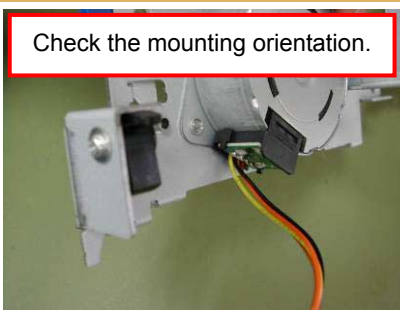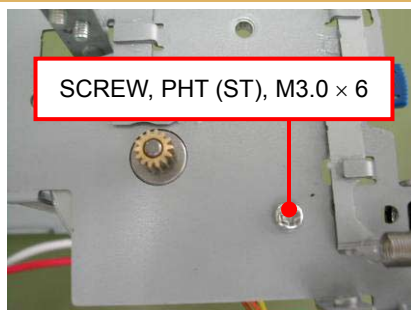

13. Disassembling "SA, POWER SW"

Pull "SA, POWER SW", attached to "SA, MAIN FRAME", toward the front while squeezing the right and left sides of "SA, POWER SW".

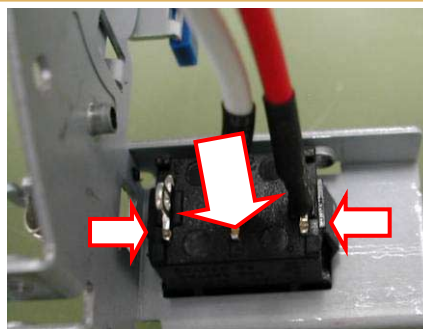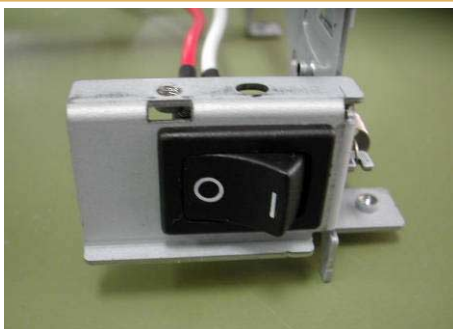

<Precaution at reassembly>

When reassembling, check the orientation of the switch.


"ON" (|) must be located in the right with "OFF" (O) in the left.

14. Disassembling “LEVER R & L, CUTTER RELEASE-02”


Detach “SPRING, LEVER CUTTER-02” from the hooks at “SA, FRAME MAIN” and “LEVER R, CUTTER RELEASE-02”. Turn “LEVER R, CUTTER RELEASE -02” toward you and remove it from the shaft at “SA, FRAME MAIN”. Remove “LEVER L, CUTTER RELEASE-02” in the same way.

**15. Disassembling “PLATE, COVER LOCK LEVER-02”**

Remove “SPRING, COVER OPEN LEVER-02” from the hooks at “LEVER R, COVER LOCK-02” and “SA, MAIN FRAME”. Remove four “SCREW, PHT (ST), M3.0 × 6” that fasten “LEVER, R & L COVER LOCK-02” and “PLATE, COVER LOCK LEVER-02”.

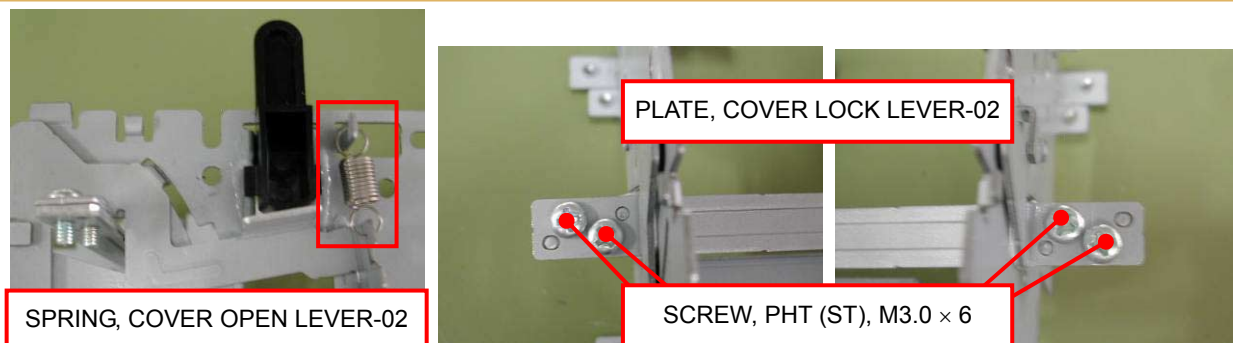
**16. Disassembling “LEVER R & L COVER LOCK-02”**

Turn “LEVER R, COVER LOCK-02” until the hook is aligned with the hole at “SA, FRAME MAIN”, and remove “LEVER R, COVER LOCK-02” along the hole. Remove “LEVER L, COVER LOCK-02” in the same way.

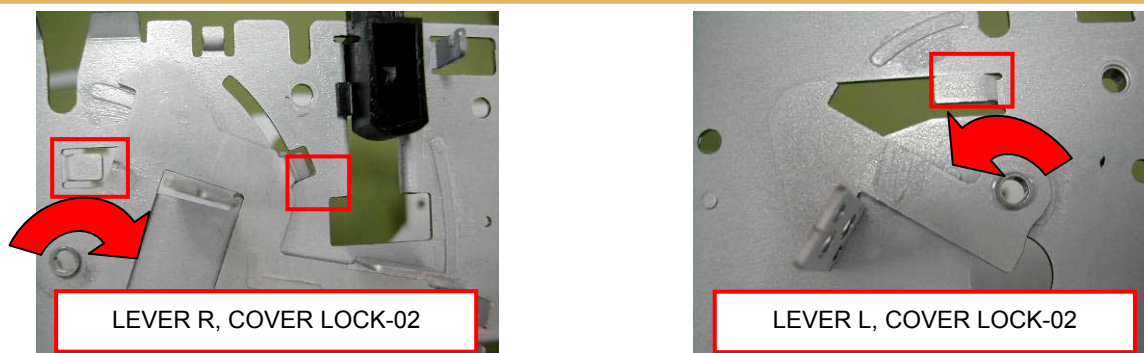



17. Disassembling “LEVER, COVER OPEN-02”

Press down “LEVER, COVER OPEN-02”, align it with the slot at “SA, MAIN FRAME”, and pull it out toward you.

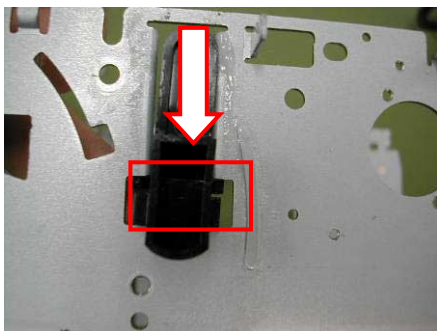

18. Disassembling “LEVER, INTERLOCK SENSOR-02”

Remove “SCREW, PH (PW), M2.0 × 8” that fastens “LEVER, INTERLOCK SENSOR-02” and “SA, MAIN FRAME”.

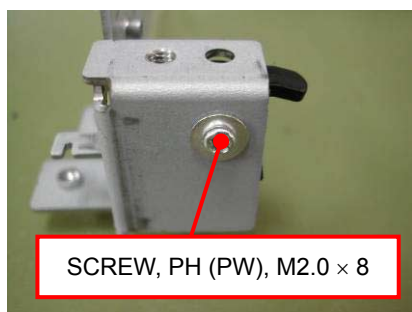

<Precaution at disassembly / reassembly>

The screw is locked with “NUT, M2”. Be careful not to loose it.

The shaft of “SHAFT, INTERLOCK SENSOR” is specially shaped to prevent it from rotating. When reassembling, align “SHAFT, INTERLOCK SENSOR” with the hole at “SA, FRAME, MAIN”.

Check the orientation of “SPRING INTERLOCK-02” and the mounting position of “SA, MAIN FRAME”.

1-3. Assembly Procedure

When reassembling the parts, follow the procedure of “1-2 Disassembly Procedure” in reverse.


1-4. Oiling

- 1) Oil Used (Grease)
 - FLOIL G311S (Kanto Kasei)
 - Daphne Eponex Grease No. 2 (Idemitsu)

- 2) Oiling Positions


<FLOIL G311S>

- (1) Shaft at "COVER GEAR"

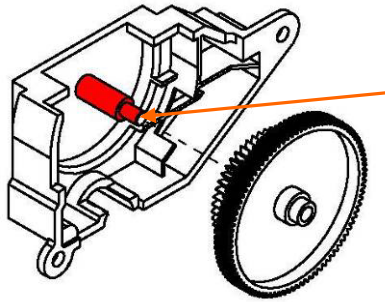


- (2) Shafts at "SHAFT, PAPER HOLDER" (4 positions)

* Apply oil to the "HOLDER PAPER" side.

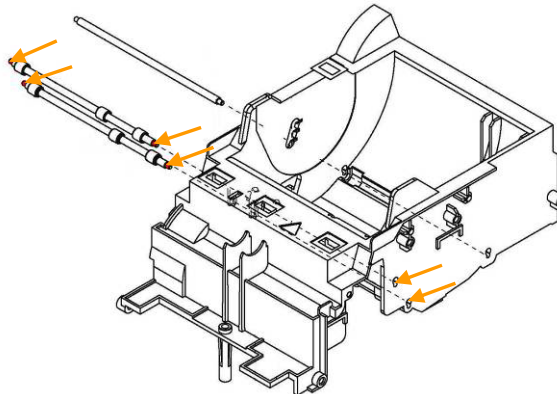


- (3) Hinge holes at "SA, COVER FRAME", mating section with "LEVER R, L COVER LOCK"
(two positions at the right and left)

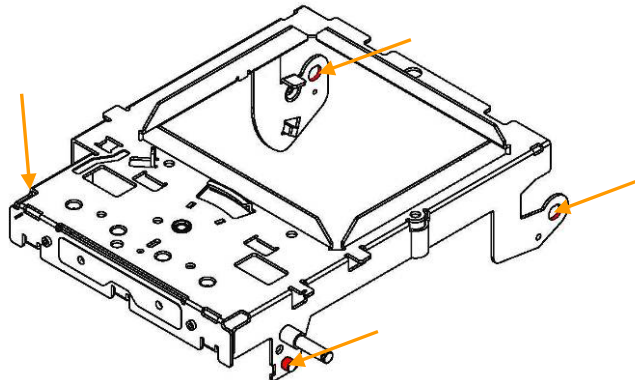


- (4) Rotating center holes, press-formed projections and hooks at "LEVER R & L, CUTTER RELEASE-02" and "SA, MAIN FRAME"

Rotating center holes, press-formed projections and hooks at "LEVER R & L, COVER LOCK-02" and "SA, MAIN FRAME"

Slideways at "LEVER, COVER OPEN-02" and "SA, MAIN FRAME"

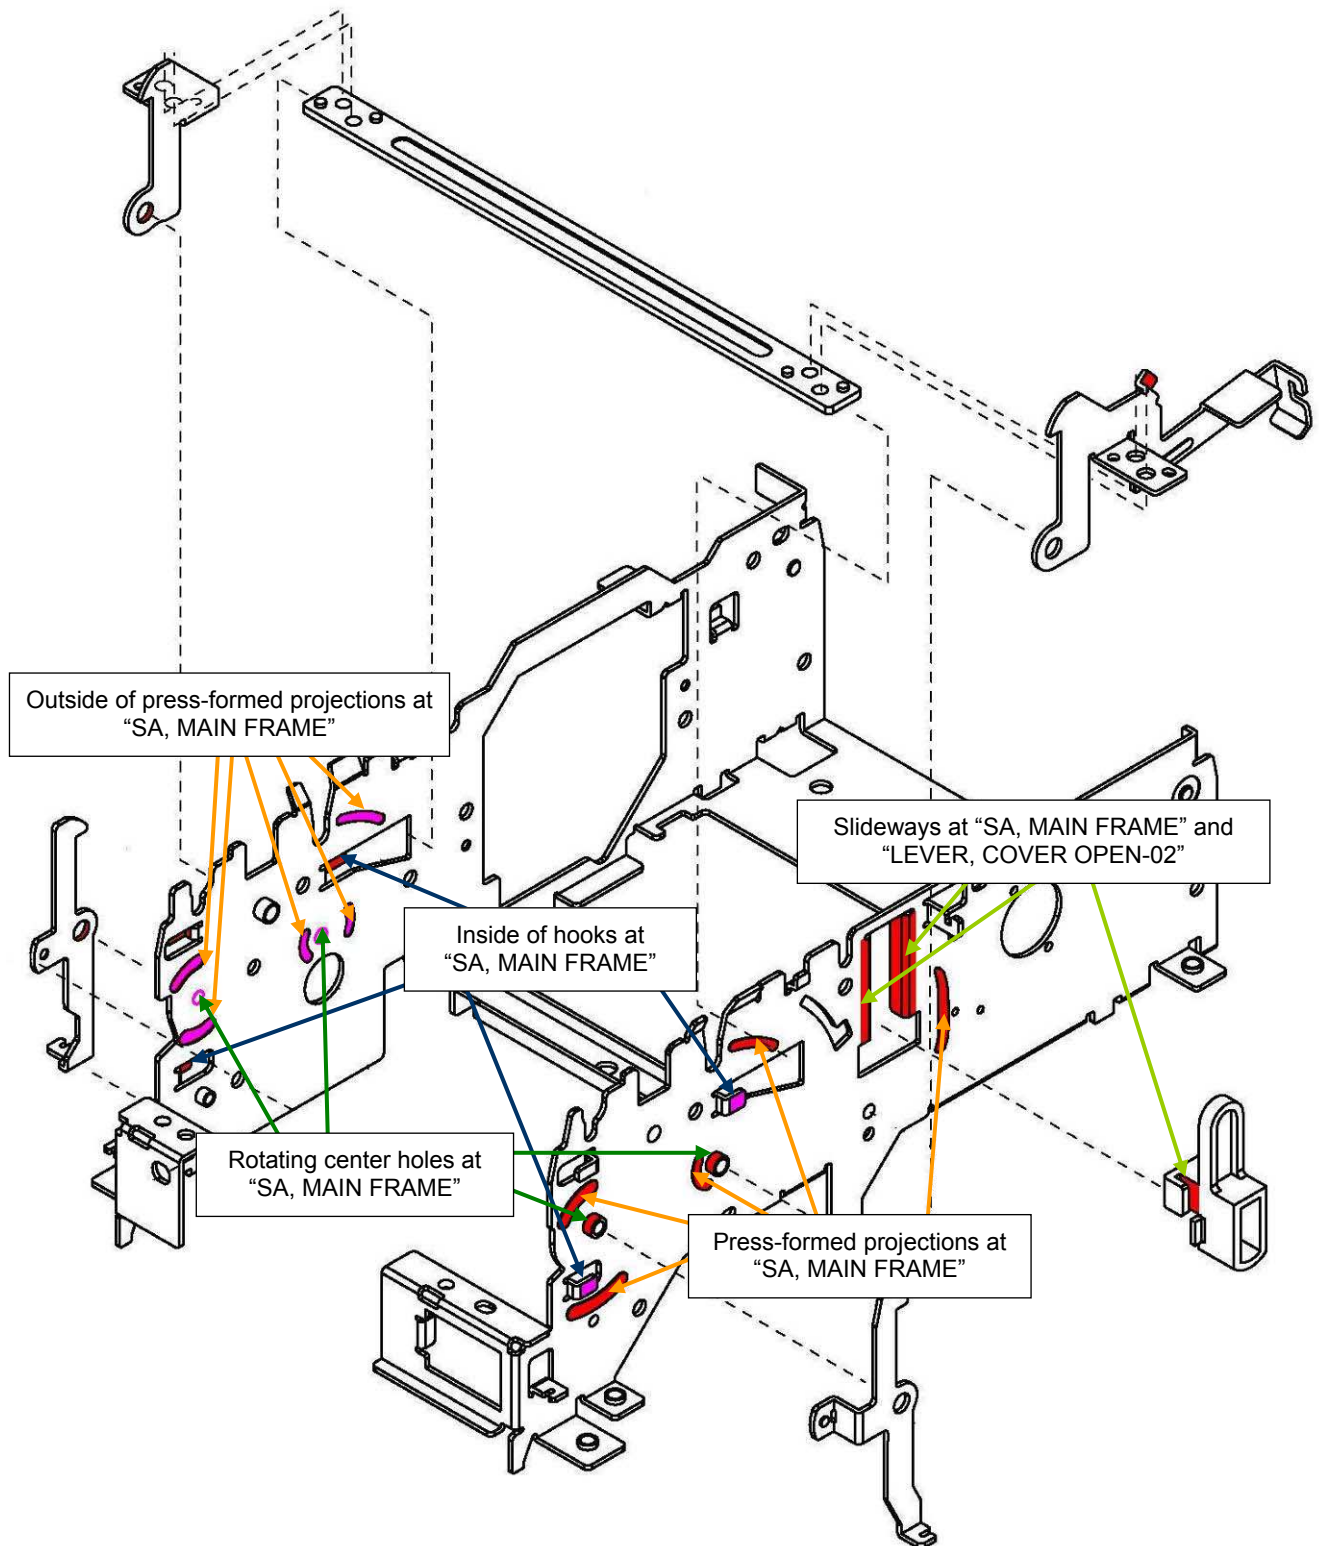


- (5) Both ends of the shaft at "SA CUTTER UNIT"

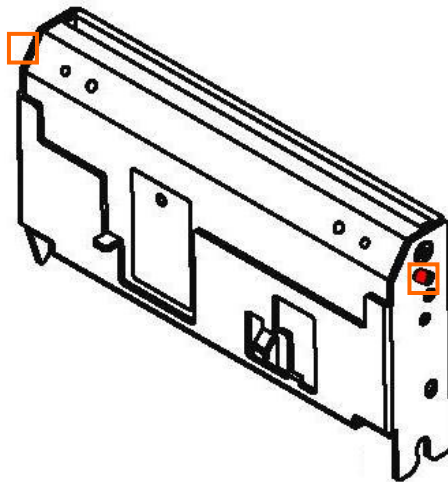

<Daphne Eponex Grease No. 2>

Right/left cutting edges of the blade at "SA, CUTTER UNIT"

Daphne Eponex Grease No. 2

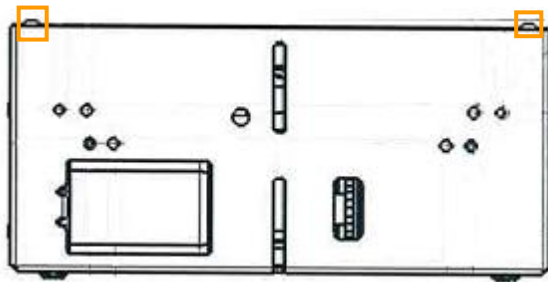

2. TROUBLESHOOTING

2-1. Error Indication

When an error is detected, the three LEDs indicate the error status in the following patterns.

LED on the panel

1) POWER LED (green)

Lit: Power supplied

Blinking: Memory check error, hex-dump mode, memory switch setting mode

Not lit: Power not supplied

2) PAPER LED (orange)

Lit: Paper end or paper near end

Blinking: Not blink









Not lit: Normal operation

3) ERROR LED (red)

Lit: Cover open, paper end

Blinking: Occurrence of an error, waiting for macro execution

Not lit: Normal operation

Status	POWER LED (Green)	PAPER LED (Orange)	ERROR LED (Red)	Buzzer Tone ^{*3}
Paper near end	Lit	Lit	—	—
Paper end	Lit	Lit	Lit	Provided
Paper cover open or front cover open ^{*1}	Lit	—	Lit	Provided
Paper cover open or front cover open ^{*2}	Lit	—		Provided
Cutter error	Lit	—		Provided
Print head hot	Lit	—		Provided
Memory error		—	—	Provided
System error	Lit	—		Provided
Low voltage error	Lit	—		Provided
High voltage error	Lit	—		Provided
Macro execution wait ^{*4}	Lit	—		—

- *1: This is the indication that appears when the paper cover is opened during standby.
- *2: This is the indication that appears when the paper cover is opened during paper feed or printing.
- *3: A buzzer beeps when MSW5-1 (buzzer setting) is ON.
- *4: The LED may light during the macro execution.

2-2. Explanations of Error Conditions

2-2-1. Paper Near End

When the diameter of the roll paper becomes small (less than 23 to 31 mm in diameter), the paper near-end sensor activates and indicates that the roll paper is running short. This message warns that the remaining paper is short. Printing can be continued until the paper runs out.

2-2-2. Paper End

When the roll paper has run out, the paper sensor in the paper path detects the end of paper near the print head and stops the printing motion. Refill the paper to cancel the error.

2-2-3. Front Cover Open

The front cover is not closed. Printing is not possible in this condition.

Close the cover to cancel the error.

2-2-4. Paper Cover Open

The paper cover is not closed. Printing is not possible in this condition.

Close the cover to cancel the error.

Depending on the memory switch setting, a command must be issued to resume printing.

2-2-5. Cutter Error

The auto cutter stops operating due to paper jams or the like. In this case, refer to "10.5 Canceling the Cutter Lock Error" and cancel the error. When you open the paper cover to clear paper jams, the message "Close the paper cover." will be displayed.

2-2-6. Print Head Hot

When you print data with high density setting, print dense images, or continue printing in a hot environment, the print head temperature may rise and if it exceeds 65°C, printing will stop. When the print head is cooled to 60°C or lower, printing will be resumed.

2-2-7. Memory Error

Built-in RAM read/write check operation is not correctly performed.

2-2-8. System Error

A disconnection of the head cable inside of the printer is detected.

When this error occurs, immediately turn the power off.

2-2-9. Low Voltage Error

If the power supplied to the printer drops to 16 V or below, operation will stop. In this case, shut down the printer immediately.

2-2-10. High Voltage Error

If the power supplied to the printer becomes 27 V or above, operation will stop. In this case, shut down the printer immediately.

2-2-11. Drawer Voltage Error

If the cash drawer drive power is overloaded by any reason (cash drawer fault, connection of external device other than cash drawer, contamination, etc.) an error will be detected and the cash drawer drive power will be shut down. In this case, shut down the printer immediately.

2-2-12. Macro Execution Wait

When the ESC/POS command is specified, the macro execution wait state will take effect. The macro will be executed when the switch is pressed or when a specified time has elapsed.

2-3. Troubleshooting Procedure

When a fault occurs, confirm its phenomenon, locate the problem in accordance with “2.2 Troubleshooting Guide”, and troubleshoot it as described below.

Phenomenon	Find the fault phenomenon in this column. If there are multiple phenomena, take all the applicable items into consideration. This will help you locate hidden problems as well.
Cause	Possible causes are listed here. Find probable causes from the list and follow the check method to identify the cause of the fault.
Check Method	The check method for identifying the cause of the fault is described.
Remedies	Take the remedies described in this column.

By following the above-mentioned procedure, you can troubleshoot problems efficiently with fewer misjudgments.

2-4. Troubleshooting Guide

- Power Supply Failure

Phenomenon	Cause	Check Method	Remedies
Power cannot be turned on. (The POWER LED not illuminated.)	The power cable is not connected.	—	Connect the power cable.
	The fuse is blown.	Check if the specified fuse is used.	Use the specified fuse.
The fuse is blown soon if it is replaced with a new one.	The control PCB is faulty.	—	Replace “SA, MAIN PCB”.
	The circuit drive power is abnormal.	Use a tester and measure the circuit drive voltage.	Replace “SA, MAIN PCB”.

* If the fuse is blown with the specified AC adapter used, the thermal head or control PCB may be defective. Replace the defective part with a new one. Check wiring of the interface cable.

- Printing Failure

Phenomenon	Cause	Check Method	Remedies
No printing	The control PCB is faulty.	—	Replace “SA, MAIN PCB”.
	The thermal head connector has a bad contact or connection.	Check the contact or connecting condition.	Re-insert the thermal head connector or replace it with a new one.
	The thermal head is faulty.	—	Replace the thermal head with a new one.
Part of printing is not done.	The thermal head connector has a bad contact or connection or faulty mounting.	Check the contact, connecting or mounting condition.	Re-insert the thermal head connector or “HEAD SA”.
	The thermal head is faulty.	—	Replace the thermal head with a new one.
Print is pale. Print is uneven. Print is faint.	The supply voltage is low.	Check the supply voltage with a tester.	Use the printer within the specified supply voltage range.
	The thermal head is faulty.	—	Replace the thermal head with a new one.
	The thermal head has fouling.	Check the thermal head for fouling.	Remove fouling using ethyl alcohol soaked cotton swab or soft cloth.
	Paper other than recommended is used.	Check if the paper being used meets the specification.	Replace it with the specified paper.
	The platen roller is not mounted correctly.	Check the mounting condition of the platen roller.	Mount the platen roller correctly.
	The paper thickness setting lever is not set correctly.	Check if the paper thickness setting is correct for the actual paper thickness.	Set the lever in the correct position.

- Paper Feed Failure

Phenomenon	Cause	Check Method	Remedies
Paper is not fed. Paper feed is not straight.	The motor connector has a bad connection.	Check the connecting condition of the connector.	Connect the connector correctly.
	The motor is faulty.	Measure the supply voltage with a tester or oscilloscope.	Replace "UNIT, MOTOR".
	The supply voltage is low.	Check the supply voltage with a tester.	Use the printer within the specified supply voltage range.
	The control PCB is faulty.	—	Replace "SA, MAIN PCB".
	The platen roller is not mounted correctly.	Check the mounting condition of the platen roller.	Mount the platen roller correctly.
	Paper feed is faulty.	Check if paper is jammed, torn or caught in the paper path.	Remove unnecessary paper and set the paper correctly.
	Foreign substances are stuck in the gear. A gear is broken.	Remove the gear holder and check the gear for any foreign substance or breakage.	Eliminate foreign substance. If any gear is broken, replace it with a new one.

- Faulty Sensor

Phenomenon	Cause	Check Method	Remedies
Paper presence or absence cannot be detected. Paper near end cannot be detected. The cover or front cover open state is not detected or remains in the detected state.	The paper sensor is faulty.	Check the indication at the LED or buzzer when the paper ends.	Replace "UNIT, PE".
	The paper near end sensor is faulty.		Replace "UNIT, PNE".
	The sensor spring is broken.	Push the sensor by hand and check if it returns.	Replace "UNIT, PE" or "UNIT, PNE".
	The connector has a bad connection.	Check the connecting condition of the connector. Check the indication at the LED or buzzer while opening and closing the cover.	Connect the connector correctly.
	The sensor is faulty.		
	The sensor lever spring is broken.	Check the indication at the LED or buzzer while opening and closing the front cover.	Replace "SPRING INTERLOCK".

- Auto Cutter Failure

Phenomenon	Cause	Check Method	Remedies
The auto cutter does not operate.	The connector has a bad connection.	Check the connecting condition of the connector.	Connect the connector correctly.
	The auto cutter is faulty.	Measure the supply voltage with a tester or oscilloscope.	If the supply voltage is normal, replace the auto cutter with a new one.
	Paper feed is faulty. (paper jams)	Check if paper is jammed, torn or caught in the paper path.	Remove unnecessary paper and set the paper correctly.

- Operation Panel Display Failure

Phenomenon	Cause	Check Method	Remedies
The operation panel LED does not illuminate.	The connector has a bad connection or cable disconnection.	Check the connecting condition of the connector. Check the cable surface.	Connect the connector correctly. Replace "SA, OP-PANEL CABLE".
	"OP-PANEL PCB" is faulty.	Replace the cable with a new one and check if the LED illuminates.	Replace "UNIT, OP-PANEL PCB".

3. SERVICE PARTS LIST

Remarks: All the parts used in the product are contained in "SERVICE PARTS LIST" in this Service Manual. However, note that all of them are not available with customers.

When placing an order for service parts, refer to the Parts Price List published separately. If you need the Parts Price List, consult the local distributor from whom you purchased this product.

3-1. Mechanical Parts List

No.	Part No.	Part Name	Q'ty	Remarks
1	TZ99803-0	UNIT, MECHANISM-02	1	Not supplied
2	TZ44701-0	SA, MAIN, FRAME-02	1	
3	TZ44212-0	COVER, CABLE PROTECT-02	1	
4	E14030-060F	SCREW, BHT (ST), M3.0 × 6	1	
5	TZ44126-0	LEVER L, CUTTER RELEASE-02	1	
6	TZ44127-0	LEVER R, CUTTER RELEASE-02	1	
7	TZ44205-0	COVER, CUTTER LEVER	2	
8	TZ23620-0	SPRING, LEVER CUTTER-02	2	
9	TZ44218-0	LEVER, INTERLOCK SENSOR-02	1	
10	TZ42201-0	SHAFT, INTERLOCK SENSOR	1	
11	E00620-080F	SCREW, PH (PW), M2.0 × 8	1	
12	E40120-000F	NUT, M2	1	
13	TZ23623-0	SPRING, INTERLOCK-02	1	
14	TZ44120-0	PLATE, COVER LOCK LEVER-02	1	
15	TZ44124-0	LEVER L, COVER LOCK-02	1	
16	TZ44125-0	LEVER R, COVER LOCK-02	1	
17	E11130-060F	SCREW, PHT (ST), M3.0 × 6	4	
18	TZ23619-0	SPRING, COVER OPEN LEVER-02	1	
19	TZ25801-0	UNIT, MOTOR	1	
20	TZ20202-0	GEAR, REDUCTION	1	
21	TZ24220-0	COVER, GEAR-02	1	
22	E00130-060F	SCREW, PHT (ST), M3.0 × 6	2	
23	TZ44221-0	LEVER, COVER OPEN-02	1	
24	TZ49702-0	SA, COVER FRAME UNIT-02	1	
25	TZ44702-0	SA, COVER FRAME-02	1	
26	TZ04202-0	LEVER, ADJUST HEAD-02	1	
27	TZ02003-0	SHAFT, HEAD ADJUST LEVER-02	1	
28	TZ04106-0	PLATE, HEAD ADJUST-02	1	
29	E00920-050F	SCREW, PH (SW + PW), M2.0 × 5	1	
30	TZ44223-0	GUIDE, HEAD HOLDER-02	1	
31	E17926-060F	SCREW, BHT (BT), M2.6 × 6	2	
32	TZ02004-0	SHAFT, HEAD ADJUST-02	1	
33	TZ23625-0	SPRING, HEAD ADJUST-02	1	
34	TZ04107-0	POLYSLIDER, HEAD ADJUST-02	1	
35	TZ09804-0	SA, THERMAL HEAD-02	1	
36	TZ67716-0	SA, HEAD CABLE (FRONT)	1	
37	TZ29701-0	SA, HEAD COVER-02	1	

No.	Part No.	Part Name	Q'ty	Remarks
38	TZ24221-0	COVER, HEAD-02	1	
39	TZ24226-0	SHAFT, DAMPER-02	2	
40	TZ24223-0	HOLDER, DAMPER PAPER-02	1	
41	TZ22202-0	DAMPER, PAPER	1	
42	TZ24228-0	SUPPORT, DAMPER SPRING-02	1	
43	TZ23616-0	SPRING, DAMPER-02	1	
44	E18117-040F	SCREW, No. 0 PH (BT2.5 × 0.5) M1.7 × 4	2	
45	TZ99913-0	LABEL, HEAT CAUTION-02	1	
46	TZ44133-0	SHEET, SENSOR COVER-02	1	
47	TZ24108-0	GUIDE, PAPER-02	1	
48-1	TZ99101-0	PLATE, FIX BLADE	1	For 3-inch model
48-2	TZ99102-0	PLATE, FIX BLADE	1	For 2-inch model
49	E16930-060F	SCREW, PHT (ST, SW + PW), M3.0 × 6	2	
50	TZ44217-0	KNOB, COVER OPEN-02	1	
51	TZ44130-0	POLYSLIDER, KNOB-02	1	
52	TZ23618-0	SPRING, COVER OPEN KNOB-02	1	
53	TZ44214-0	COVER, CABLE-02	1	
54	E14020-040F	SCREW, PHT (ST), M2.0 × 4	1	
55	TZ40201-0	GEAR, COVER DAMPER	1	
56	TZ23615-0	SPRING, HEAD-02	3	
57	TZ40901-0	GEAR, DAMPER C	1	
58	E14020-040F	SCREW, BHT (ST), M2.0 × 4	2	
59	TZ68710-0	SA, COVER OPEN SENSOR-F	1	
60	E13517-070F	SCREW, No. 0, PHT (BT#3), M1.7 × 7	2	
61	TZ49701-0	SA, PAPER HOLDER-02	1	
62	TZ44216-0	HOLDER, PAPER-02	1	
63	TZ22201-0	ROLLER, PAPER	6	
64	TZ22001-0	SHAFT, PAPER HOLDER	3	
65	TZ99914-0	LABEL, EDGE CAUTION-02	1	
66	TZ44131-0	SHEET, SENSOR MAIN-02	3	
67	E17930-060F	SCREW, BHT (BT), M3.0 × 6	3	
68	E18330-080F	SCREW, BHT (BT, PW), M3.0 × 8	1	
69	TZ44804-0	UNIT, PNE-02	1	
70	TZ24206-0	BASE, PNE UNIT	1	
71	TZ24207-0	LEVER, PNE UNIT	1	
72	TZ24208-0	BASE, PNE SENSOR	1	
73	TZ24209-0	LEVER, PNE SENSOR	1	
74	TZ24210-0	SWITCH, PNE UNIT	1	
75	TZ24212-0	SUPPORT, LEVER PNE	1	
76	TZ23607-0	SPRING, PNE SENSOR	1	
77	TZ23608-0	SPRING, PNE UNIT	1	
78	TZ23609-0	SPRING, SUPPORT PNE	1	
79	TZ23613-0	SPRING, SWITCH PNE	1	
80	E10120-080F	SCREW, BHT (PT) M2.0 × 8	2	
81	TZ68711-0	SA, PNE SENSOR-F	1	
82	TZ24106-0	PLATE, PNE SENSOR-02	1	
83	E10130-080F	SCREW, PHT (#2), M3.0 × 8	3	
84	TZ44803-0	UNIT, PE-02	1	

No.	Part No.	Part Name	Q'ty	Remarks
85	TZ24218-0	BASE, PE SENSOR-02	1	Not supplied
86	TZ24205-0	LEVER, PE SENSOR	1	Not supplied
87	TZ23606-0	SPRING, PE SENSOR	1	Not supplied
88	TZ68703-0	SA, PE SENSOR	1	Not supplied
89	E12820-060F	SCREW, BHT (PT) M2.0 × 6	2	Not supplied
90	E12820-060F	SCREW, BHT (PT) M2.0 × 6	2	
91	TZ44219-0	PARTITION, PAPER-02	1 (2)	(For 2-inch model)
92	TZ44116-0	WASHER, PLATEN	2	
93	TZ68701-0	SA, POWER SW	1	
94-1	TZ66729-0	SA, MAIN PCB (651ENG)	1	
94-2	TZ66730-0	SA, MAIN PCB (651JPN)	1	
94-3	TZ66731-0	SA, MAIN PCB (651CHN)	1	
94-4	TZ66732-0	SA, MAIN PCB (651AUS)	1	
95	E14030-060F	SCREW, BHT (ST), M3.0 × 6	4	
96	TZ44102-0	FRAME, BOTTOM	1	
97	E14030-060F	SCREW, BHT (ST), M3.0 × 6	4	
98	BE54106-0	LEG	4	
99	TZ23624-0	SPRING, CUTTER POPUP-02	1	
100-1	TZ29702-0	SA, PLATEN UNIT-02	1	For 3-inch model
100-2	TZ29703-0	SA, PLATEN UNIT (2INCH)-02	1	For 2-inch model
101-1	TZ28501-1	SA, PLATEN	1	For 3-inch model
101-2	TZ28502-1	SA, PLATEN (2INCH)	1	For 2-inch model
102	TZ24222-0	COVER, PLATEN-02	1	
103	TZ24224-0	HANDLE, PLATEN-02	2	
104	TZ04105-0	PLATE, PLATEN-02	2	
105	E18220-050F	SCREW, No. 0 TFH (ST4 × 0.5) M2.0 × 5	4	
106	TZ21402-0	BUSHING, PLATEN-02	2	
107	E60340-000F	E-RING, 4.0	2	
108	TZ20201-0	GEAR, PLATEN	1	
109	TZ44116-0	WASHER, PLATEN	1	
110	TZ99702-0	SA, CUTTER UNIT-02	1	
111	TZ44703-0	SA, CUTTER UNIT FRAME-02	1	
112	E03920-030WF	SCREW, No. 0, TFH, M2 × 3 (NI)	2	
113	TZ98902-0	UNIT, SLIDE BLADE	1	
114	TZ24104-0	SHEET, CUTTER UNIT	1	
115	TZ44135-0	SHEET, CABLE PROTECT-02	1	
116	TZ67710-0	SA, CUTTER CABLE	1	
117-1	TZ59707-0	SA, FRONT COVER 2-02	1	White
117-2	TZ59708-0	SA, FRONT COVER BK 2-02	1	Black
118-1	TZ56229-0	COVER, FRONT 2-02	1	White
118-2	TZ56230-0	COVER, FRONT BK 2-02	1	Black
119	TZ44220-0	PIN, FRONT COVER-02	1	
120	TZ23622-0	SPRING R, FRONT COVER-02	1	
121	TZ66724-0	SA, OPEPANE PCB-651	1	
122	E12820-060F	SCREW, BHT (PT) M2.0 × 6	1	
123	TZ44138-0	SHEET, LED 2-02	1	
124	TZ56231-0	PANEL, FRONT 2-02	1	
125	TZ44224-0	KEY, OPE-PANE FEED 2-02	1	

No.	Part No.	Part Name	Q'ty	Remarks
126	TZ54113-0	SHEET, OPE-PANE FEED 2-02	1	
127	TZ67722-0	SA, OPEPANE CABLE-651	1	
128	TZ44222-0	HOLDER, FRONT COVER-02	1	
129	E14030-060F	SCREW, BHT (ST), M3.0 × 6	2	
130-1	TZ56221-0	CASE-02	(1)	White
130-2	TZ56222-0 (BK)	CASE BK-02	(1)	Black
131	E14030-060F	SCREW, BHT (ST), M3.0 × 6	2	
132	TZ24225-0	PIN, FRONT COVER L-02	1	
133	TZ23621-0	SPRING L, FRONT COVER-02	1	
134-1	TZ56206-1	COVER, POWER SWITCH	(1)	White
134-2	TZ56214-1	COVER, POWER SWITCH BK	(1)	Black
135-1	TZ56223-0	COVER-02	(1)	White
135-2	TZ56214-0 (BK)	COVER BK-02	(1)	Black
136	TZ24107-0	CUTTER, MANUAL-02	1	
137	E12830-100F	SCREW, BHT (PT), M3.0 × 10	3	
138-1	TA69905-1	SWITCHING ADAPTER (36AD3)	1	
138-2	TA69904-1	SWITCHING ADAPTER (36AD2)	1	
139-1	TZ56207-1	COVER, ADAPTER	(1)	White
139-2	TZ56215-1 (BK)	COVER, ADAPTER BK	(1)	Black
140	BE54106-0	LEG	4	
141	E14030-060F	SCREW, BHT (ST), M3.0 × 6	4	
142	TZ66801-0	UNIT, SERIAL I/F PCB (inch)	1	Option
143	TZ66712-0	SA, SERIAL I/F PCB	1	
144	TA54103-0	PLATE_SERIAL_I_F	1	
145	C6390-054#	LOCK SCREW (INCH)	2	
146	E11130-060F	SCREW, BHT (ST), M3.0 × 6	2	
147	TZ66808-0	UNIT, SERIAL I/F PCB (mm)	1	Option
148	TZ66712-0	SA, SERIAL I/F PCB	1	
149	TA54103-0	PLATE_SERIAL_I_F	1	
150	C6390-055#	LOCK SCREW (M2.6)	2	
151	E14030-060F	SCREW, BHT (ST), M3.0 × 6	2	
152	TZ66803-0	UNIT, USB PCB I/F	1	Option
153	TZ66714-0	SA, USB I/F PCB	1	
154	TA54104-0	PLATE_USB_I_F	1	
155	E14030-040F	SCREW, BHT (ST), M3.0 × 4	2	
156	E14030-060F	SCREW, BHT (ST), M3.0 × 6	2	
157	TZ59901-0	LWS-1S (CABLE, CLAMP)	1	
158	TZ66802-0	UNIT, PARALLEL I/F	1	Option
159	TZ66713-0	SA, PARALLEL I/F PCB	1	
160	TA54102-0	PLATE_PARALLEL_I_F	1	
161	E14030-060F	SCREW, BHT (ST), M3.0 × 6	2	
162	E14030-060F	SCREW, BHT (ST), M3.0 × 6	2	
163	TZ66804-0	UNIT, POWERED USB I/F PCB	1	Option
164	TZ66715-0	SA, POWERED USB I/F PCB	1	
165	TZ54110-0	PLATE, POWERED USB I/F 2	1	
166	E14030-040F	SCREW, BHT (ST), M3.0 × 4	2	
167	E14030-060F	SCREW, BHT (ST), M3.0 × 6	2	
168	TZ66809-0	UNIT, USB HUB I/F PCB	1	Option


No.	Part No.	Part Name	Q'ty	Remarks
169	TZ66718-0	SA, USB HUB I/F PCB	1	
170	TZ54105-0	PLATE, USB I/F 2	1	
171	E14030-040F	SCREW, BHT (ST), M3.0 × 4	2	
172	E14030-060F	SCREW, BHT (ST), M3.0 × 6	2	
173	TZ66805-0	UNIT, ETHERNET E type I/F PCB	1	Option
174	TZ66716-0	SA, ETHERNET E type I/F PCB	1	
175	TZ54111-0	PLATE, LAN I/F	1	
176	TZ54112-0	JOINT, LAN I/F	2	
177	TZ44134-0	SHEET, LAN PCB	1	
178	E00530-040F	SCREW, BH, M3.0 × 4	4	
179	E14030-060F	SCREW, BHT (ST), M3.0 × 6	2	
180	TZ69901-0	UNIT, ETHERNET (SEH PS114)	1	Option
181	E14030-060F	SCREW, BHT (ST), M3.0 × 6	2	


List of Screws Used

Part No.	Part Name	No.
E00530-040F	SCREW, BH, M3.0 × 4	177
E00620-080F	SCREW, PH (PW), M2.0 × 8	11
E10120-080F	SCREW, PHT (PT) M2.0 × 8	80
E00130-060F	SCREW, PHT (ST) M3.0 × 6	22
E10130-080F	SCREW, PHT (#2), M3.0 × 8	83
E14020-040F	SCREW, BHT (ST), M2.0 × 4	54, 58
E11130-040F	SCREW, BHT (ST), M3.0 × 4	138
E11130-060F	SCREW, PHT (ST), M3.0 × 6	17, 147
E12820-060F	SCREW, BHT (PT) M2.0 × 6	90
E12830-100F	SCREW, BHT (PT), M3.0 × 10	139
E13517-070F	SCREW, No. 0, PHT (BT#3), M1.7 × 7	60
E14030-040F	SCREW, BHT (ST), M3.0 × 4	156, 167, 172, 179
E14030-060F	SCREW, BHT (ST), M3.0 × 6	4, 95, 97, 130, 142, 152, 163, 167, 168, 173, 180, 182
E16930-060F	SCREW, PHT (ST, SW + PW), M3.0 × 6	49
E17930-060F	SCREW, BHT (BT), M3.0 × 6	67
E18330-080F	SCREW, BHT (BT, PW), M3.0 × 8	68


3-1-1. Mechanical Exploded Diagrams

Exploded diagram 1

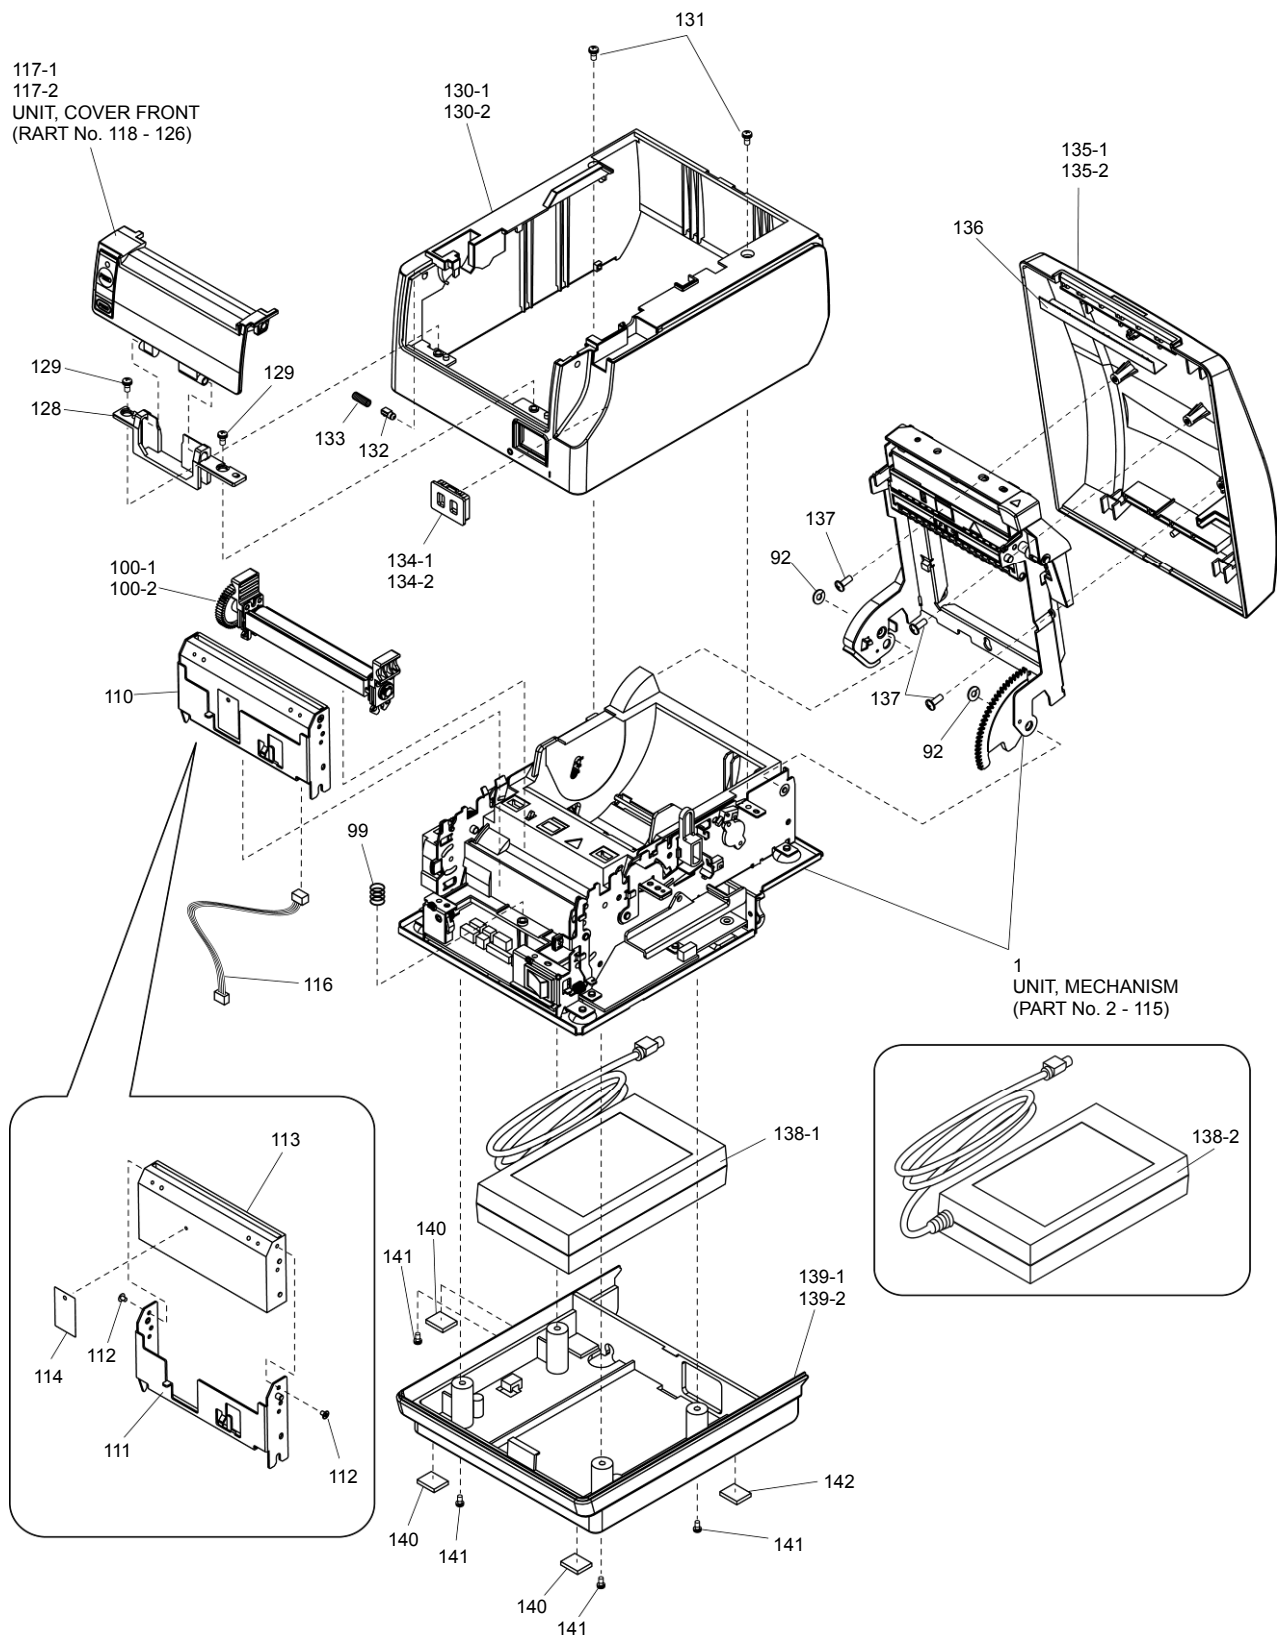


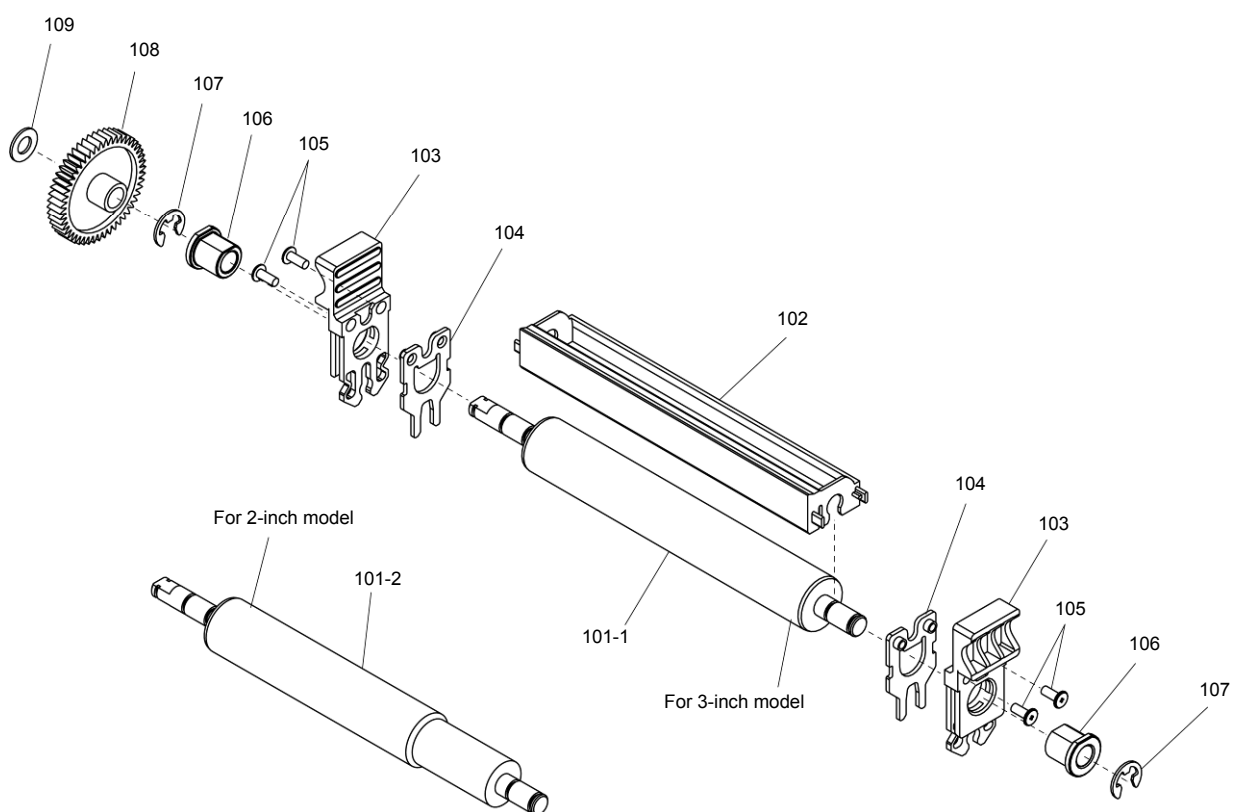


Exploded diagram 3

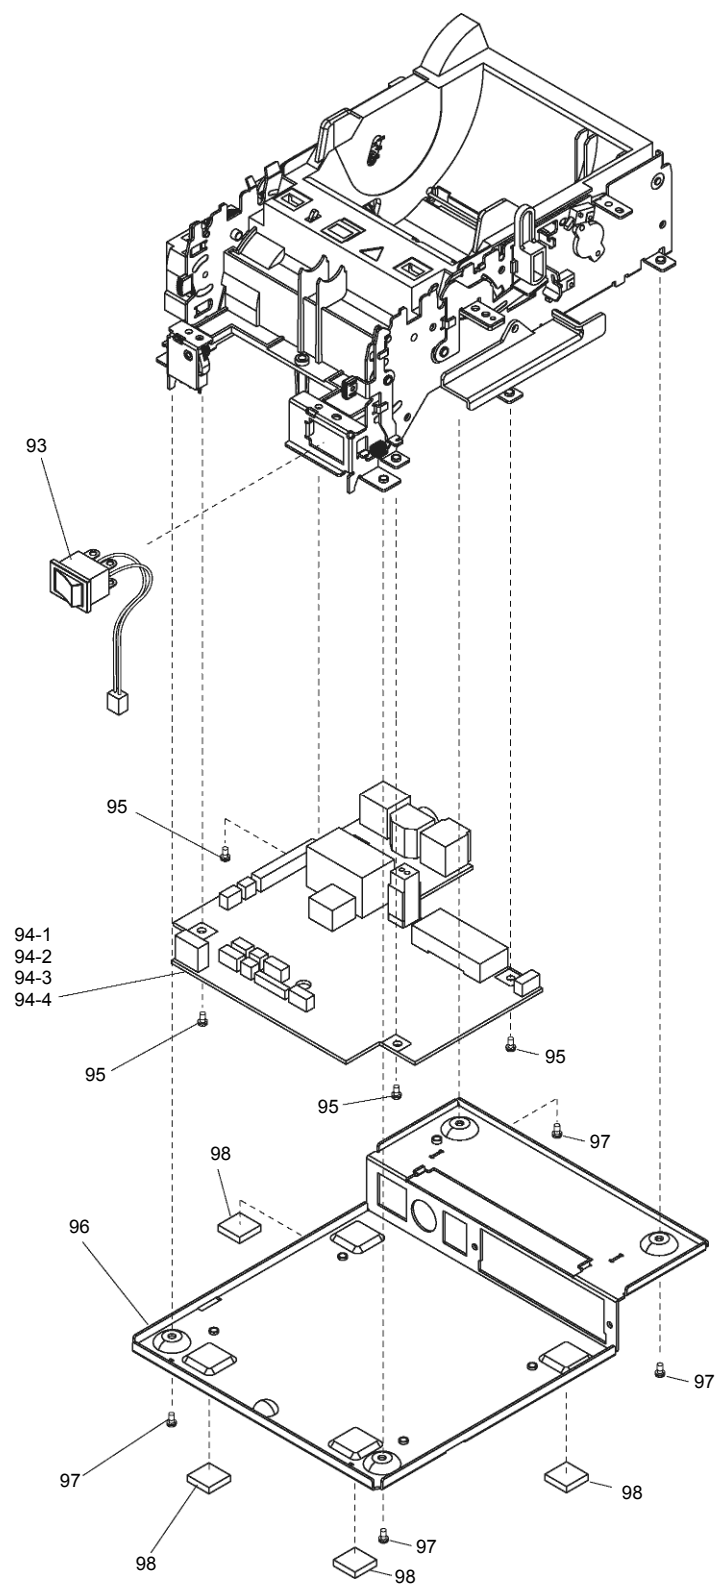


Exploded diagram 4

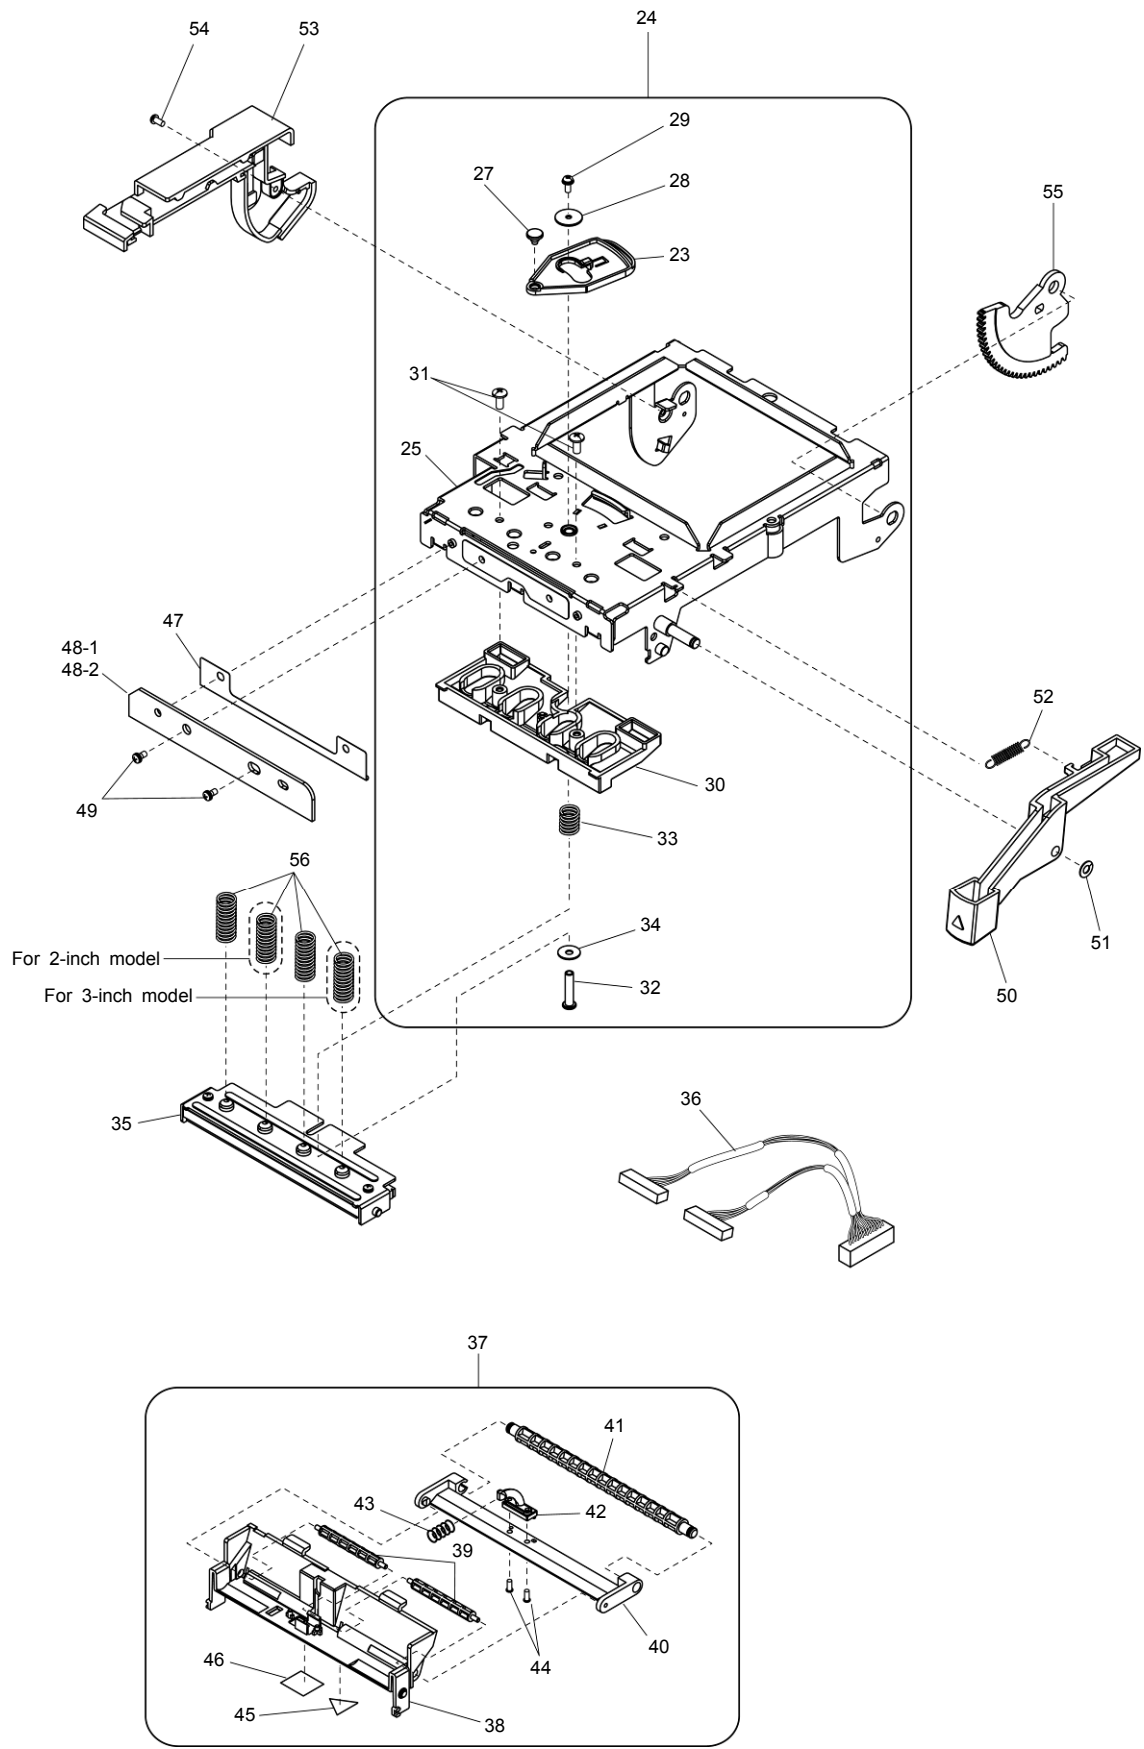


Exploded diagram 5

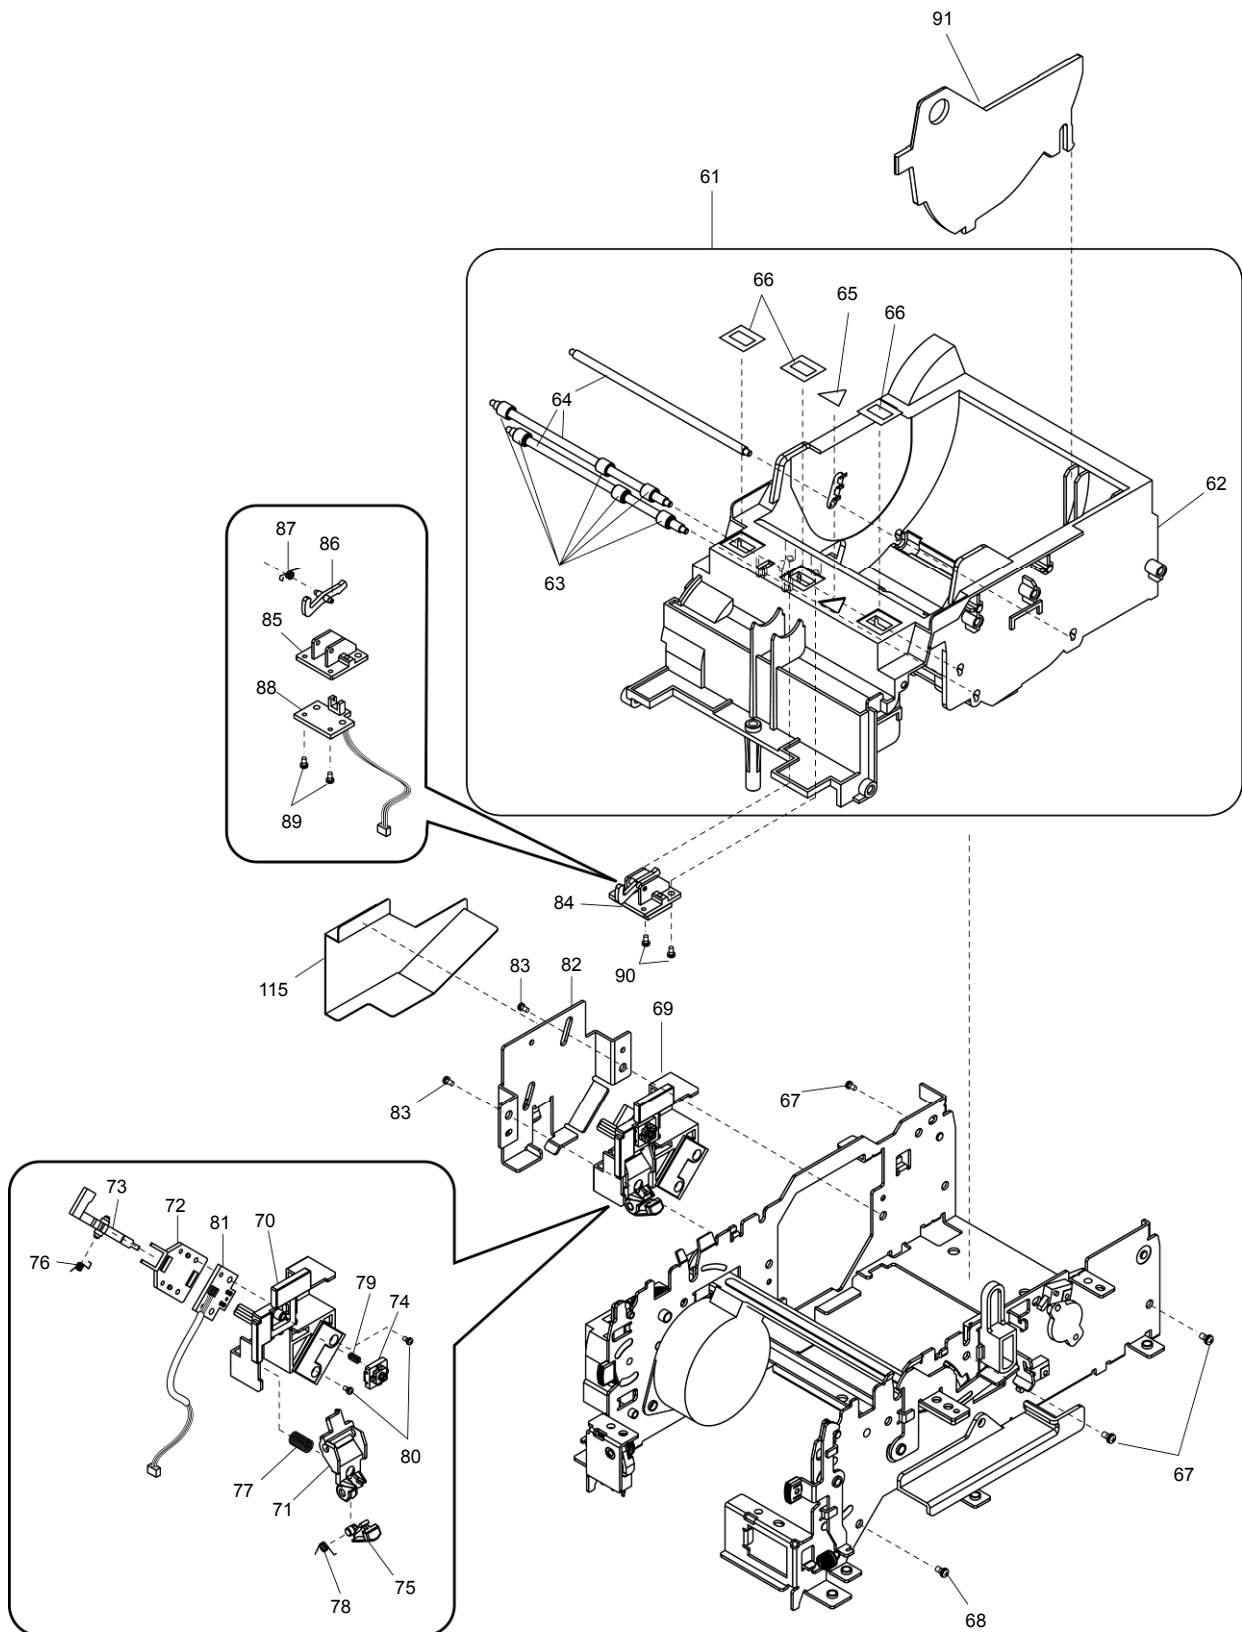


Exploded diagram 6

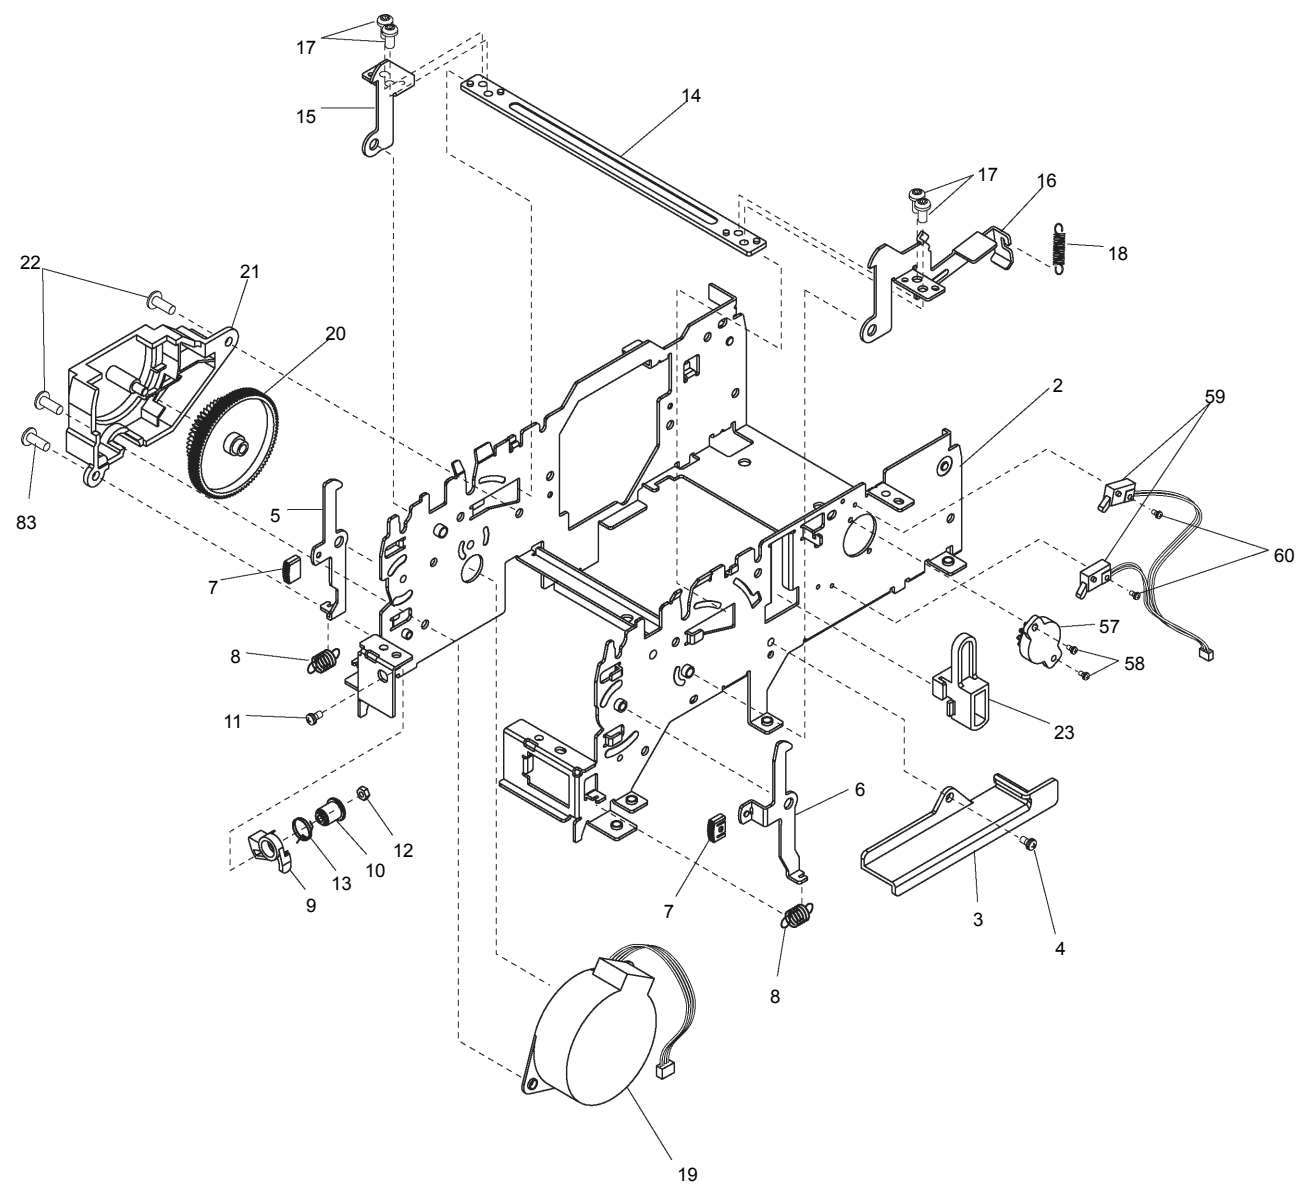



Exploded diagram 7

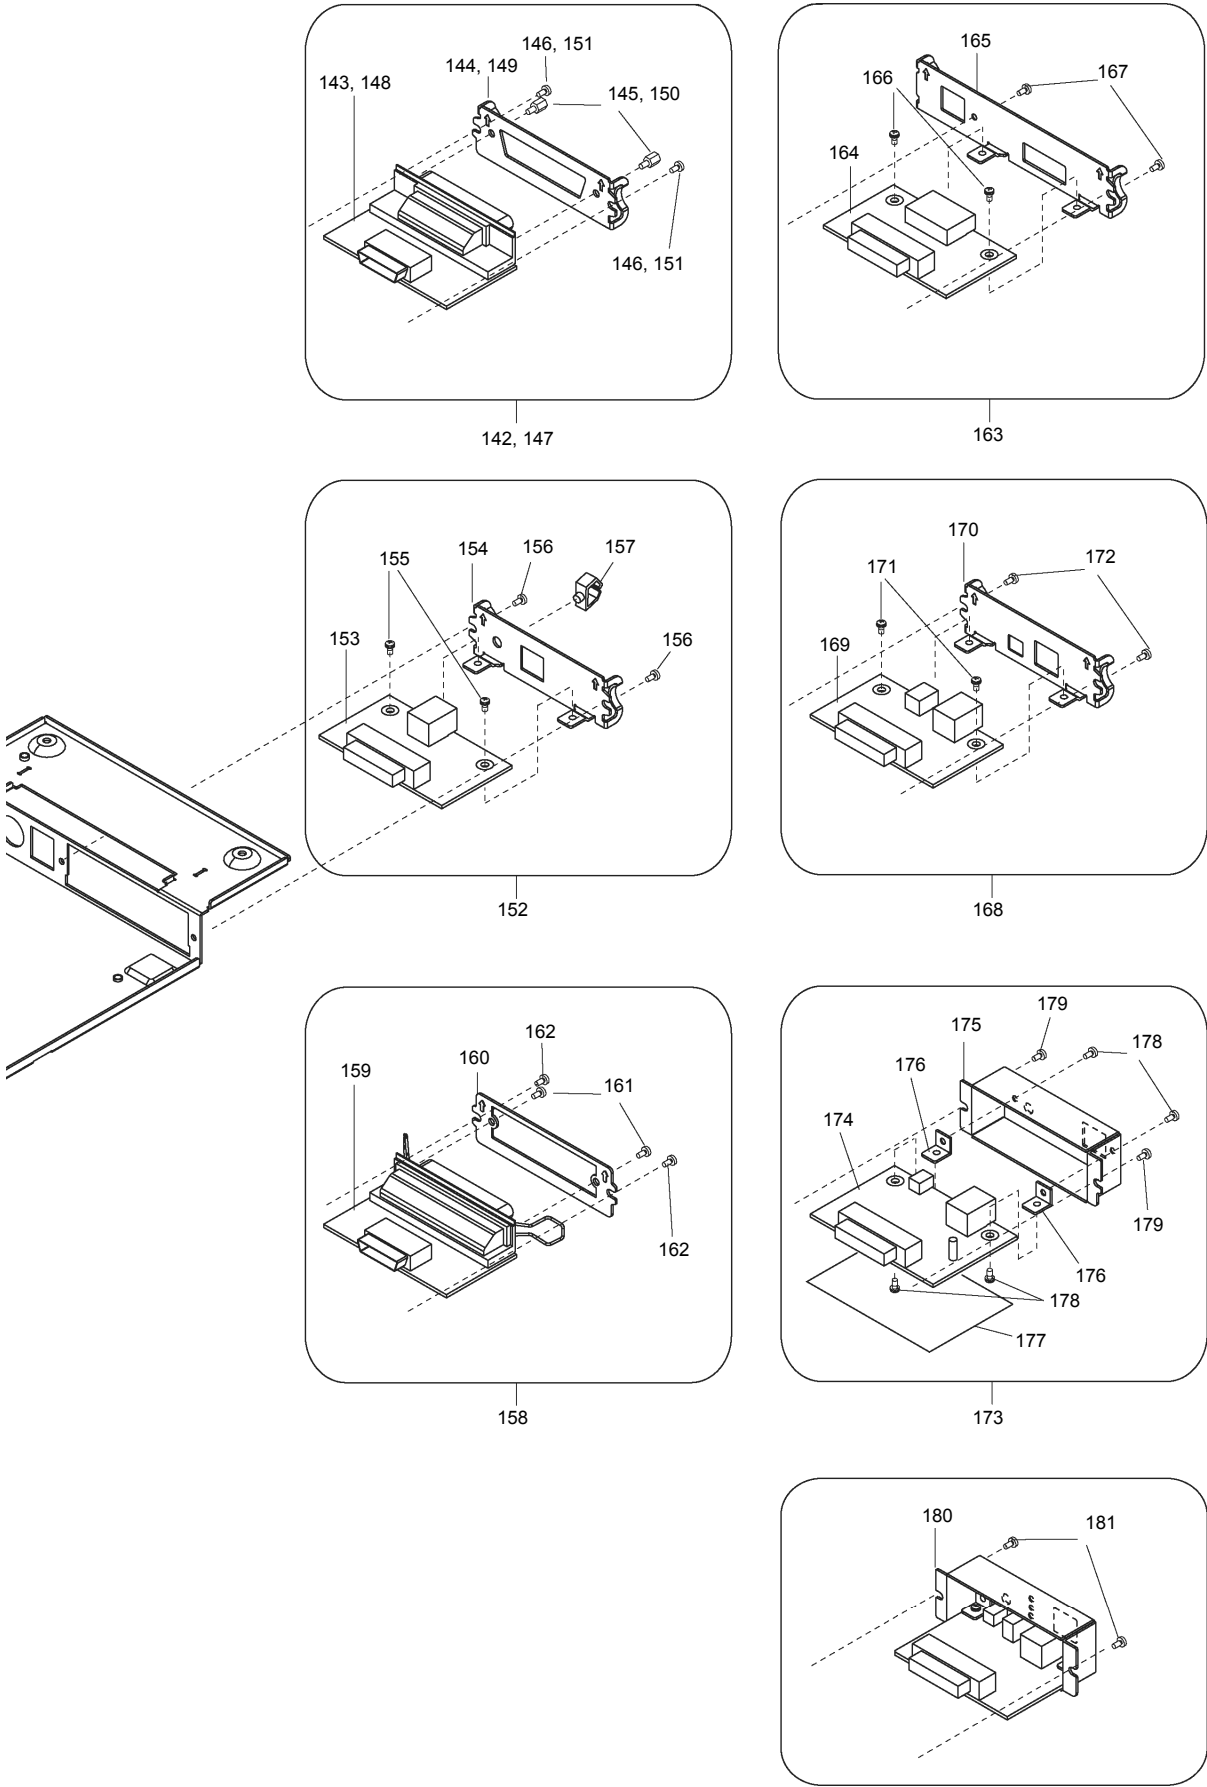






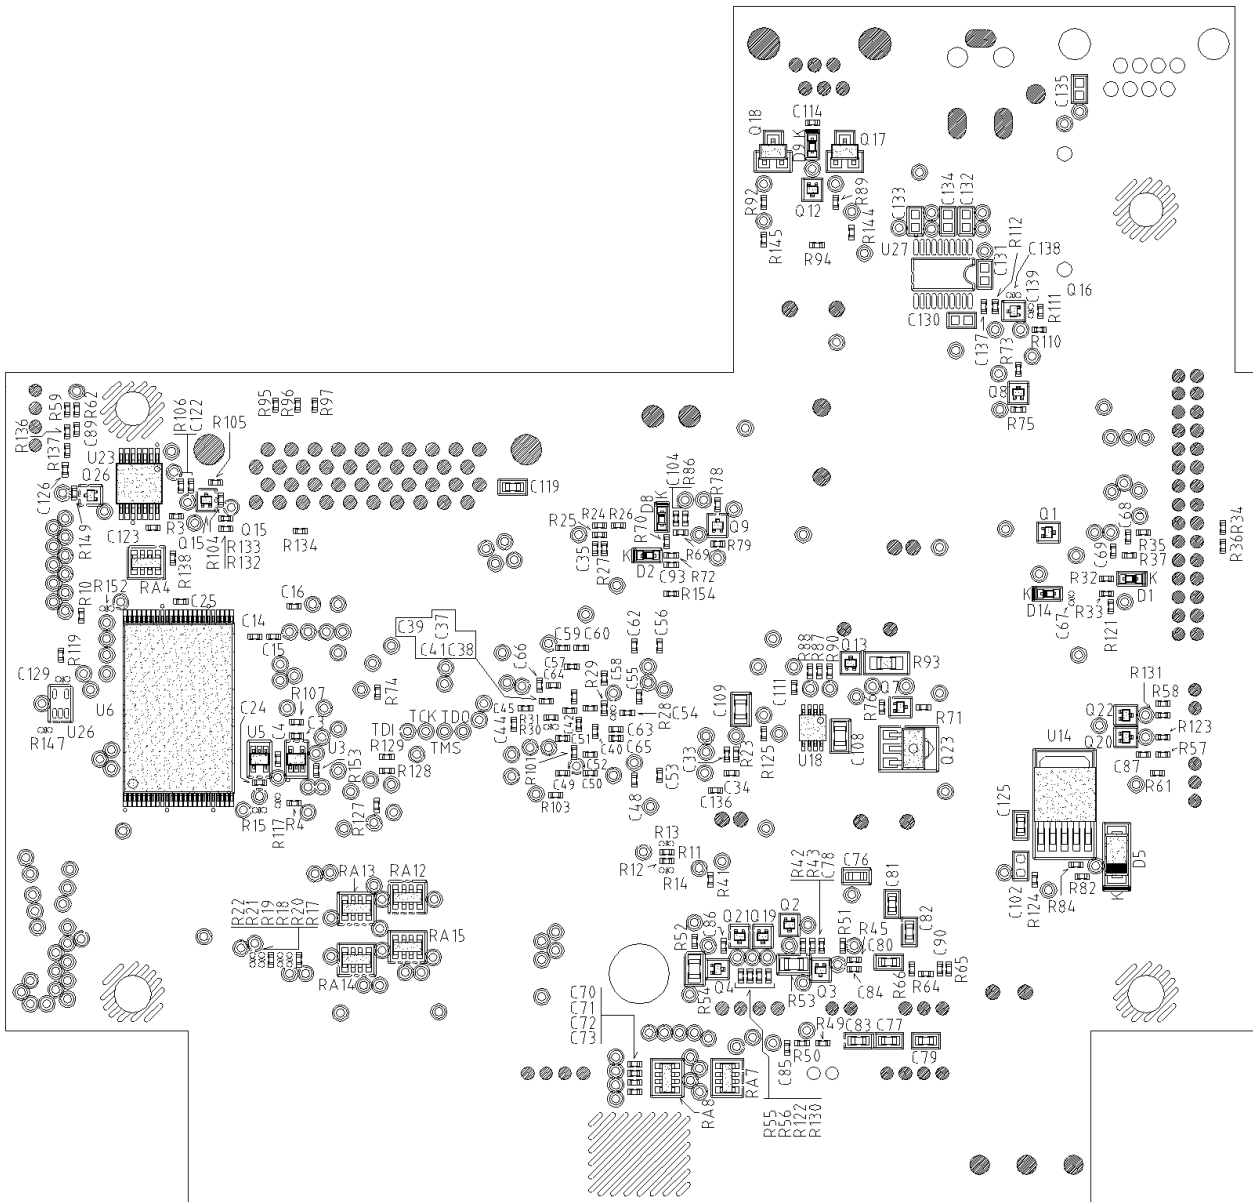


3-2-2. SA, OPEPANE PCB-651

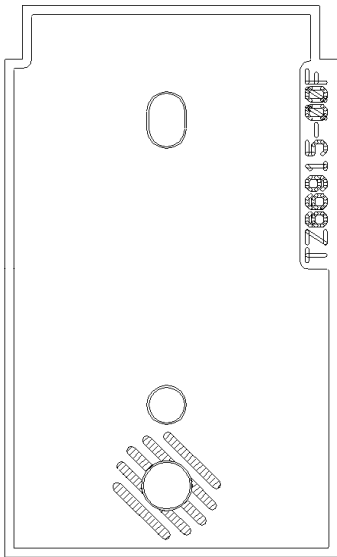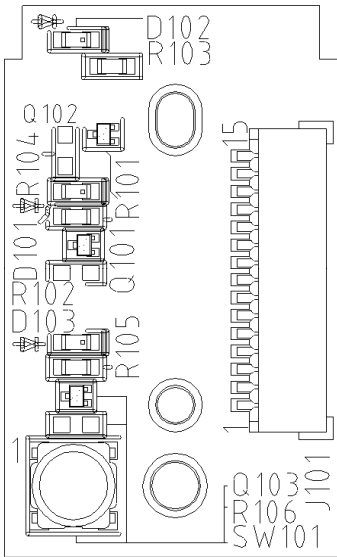

3-2-3. SA, SERIAL I/F PCB

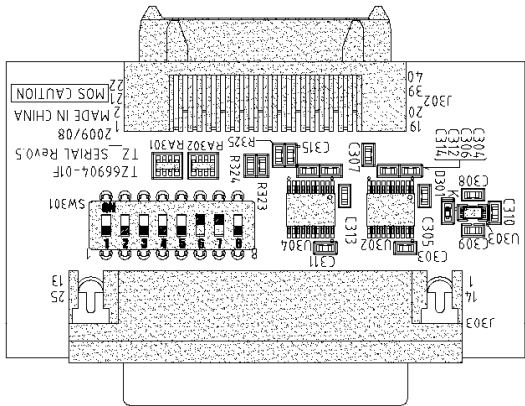
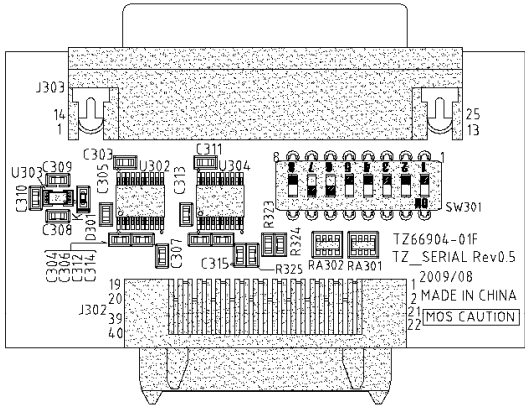


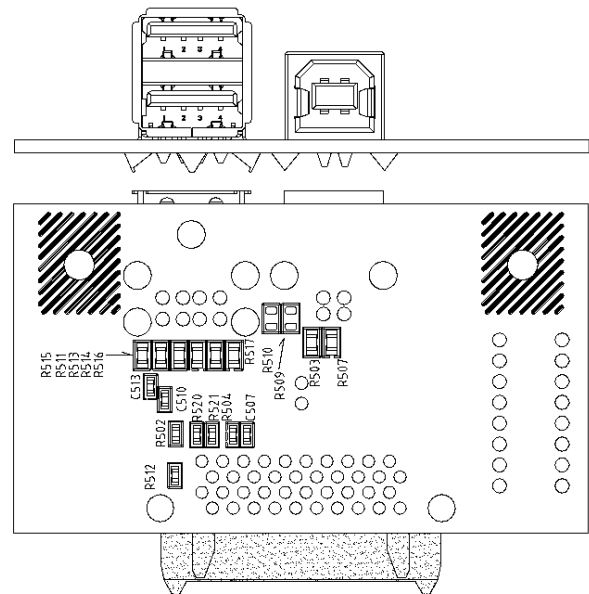

TZ6910-00F
 TZ PowerUSB Rev0.0
 CITIZEN SYSTEMS JAPAN
 MADE IN CHINA 2009/06

Dimensions (mm):
 16, 8, 21, 22, 20, 19, 18, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820,


3-2-8. SA, ETHERNET E Type I/F PCB

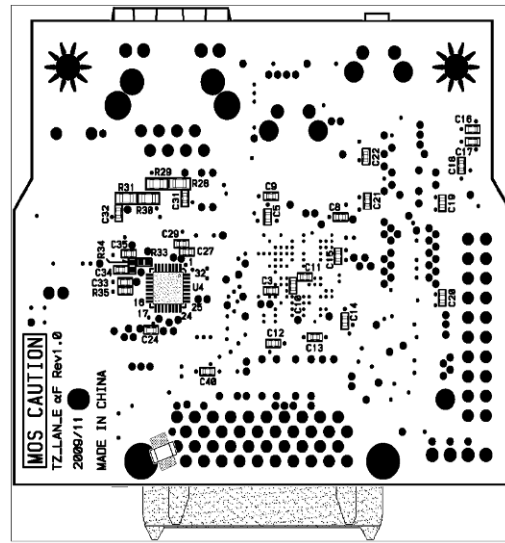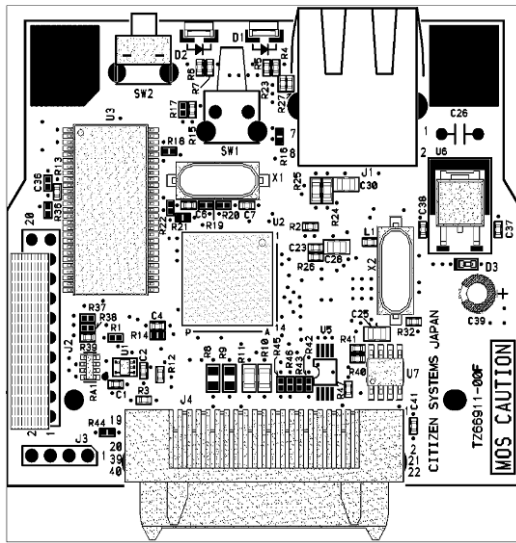


4. CIRCUIT DIAGRAMS

4-1. MAIN PCB


4-1-1. Main Control Board (CPU1)

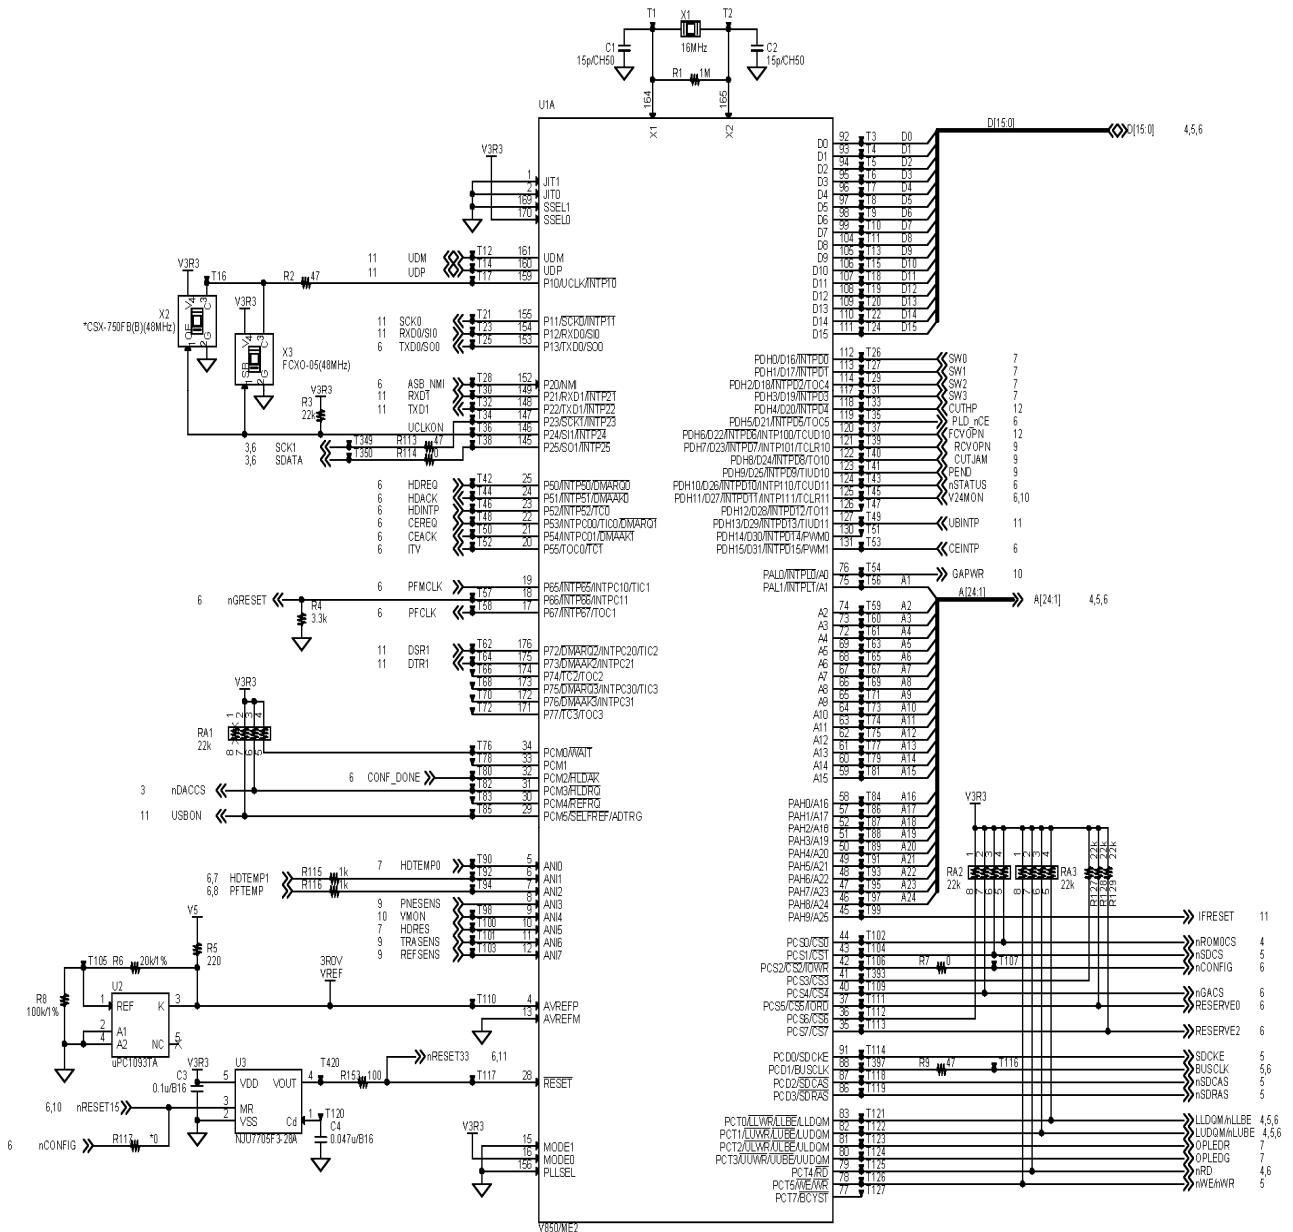


4-1-2. Main Control Board (CPU2/DAC)

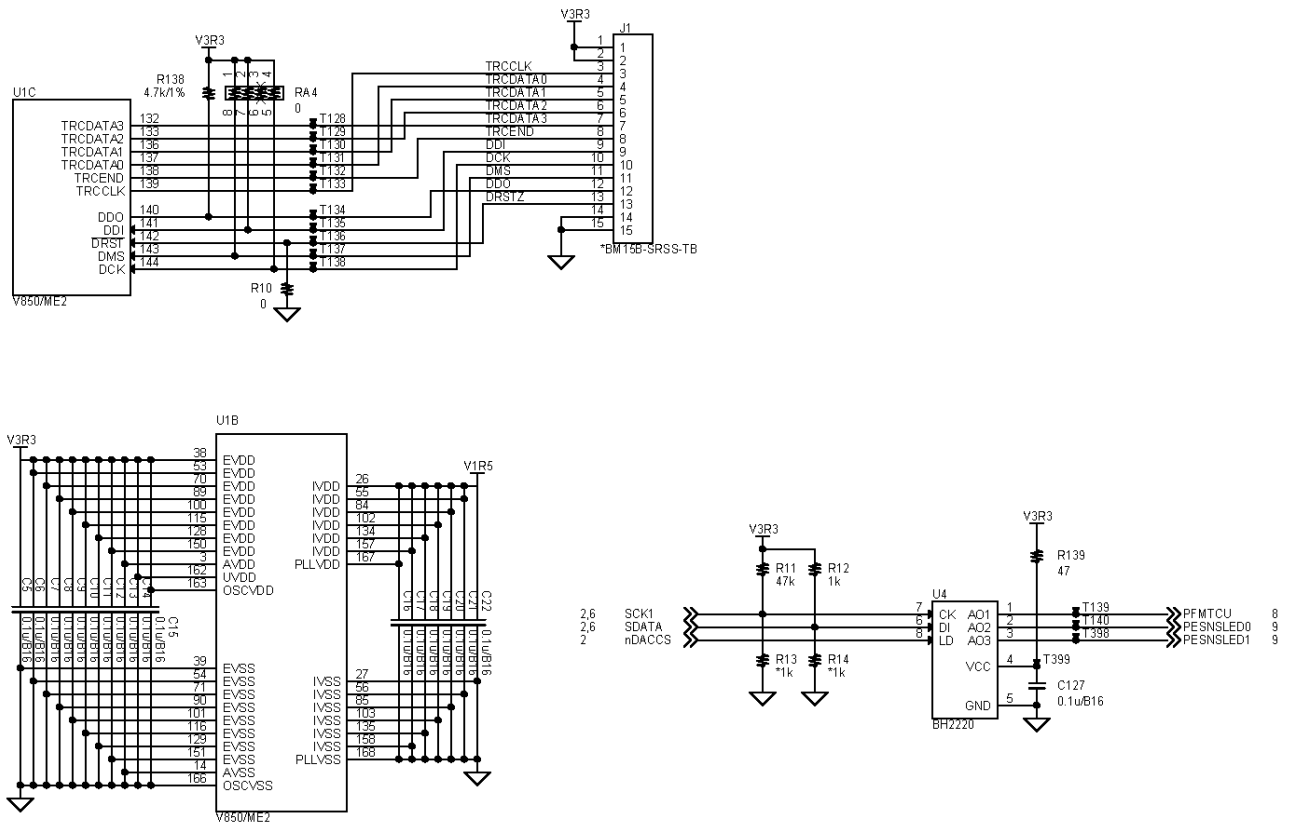


4-1-3. Main Control Board (ROM)

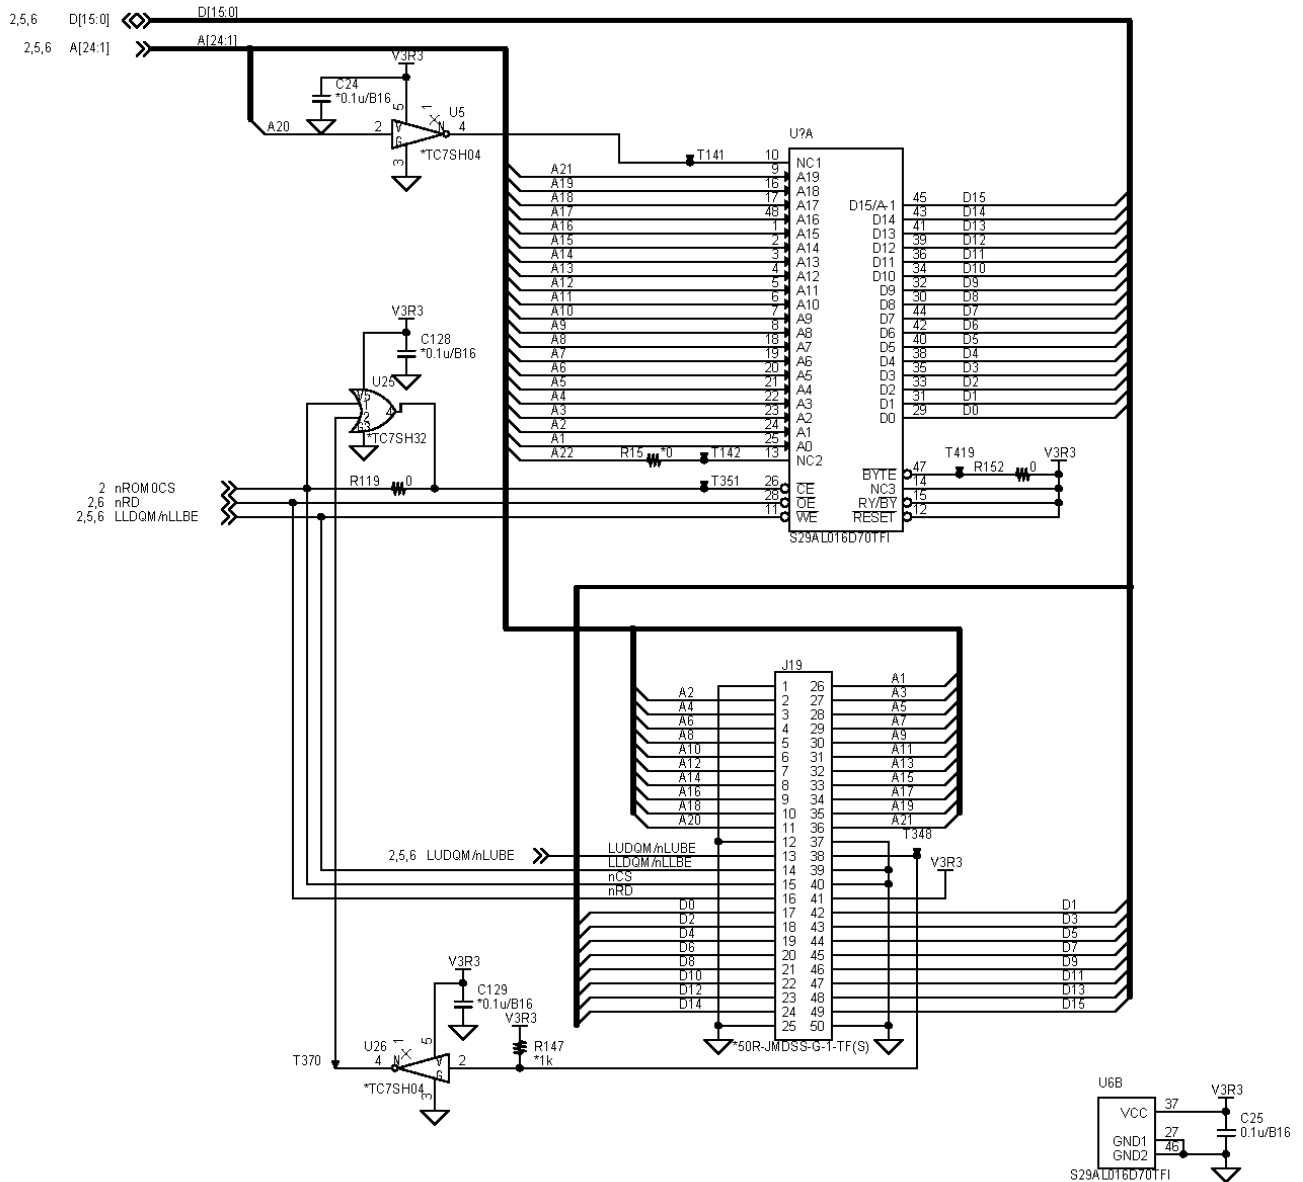


4-1-4. Main Control Board (RAM)

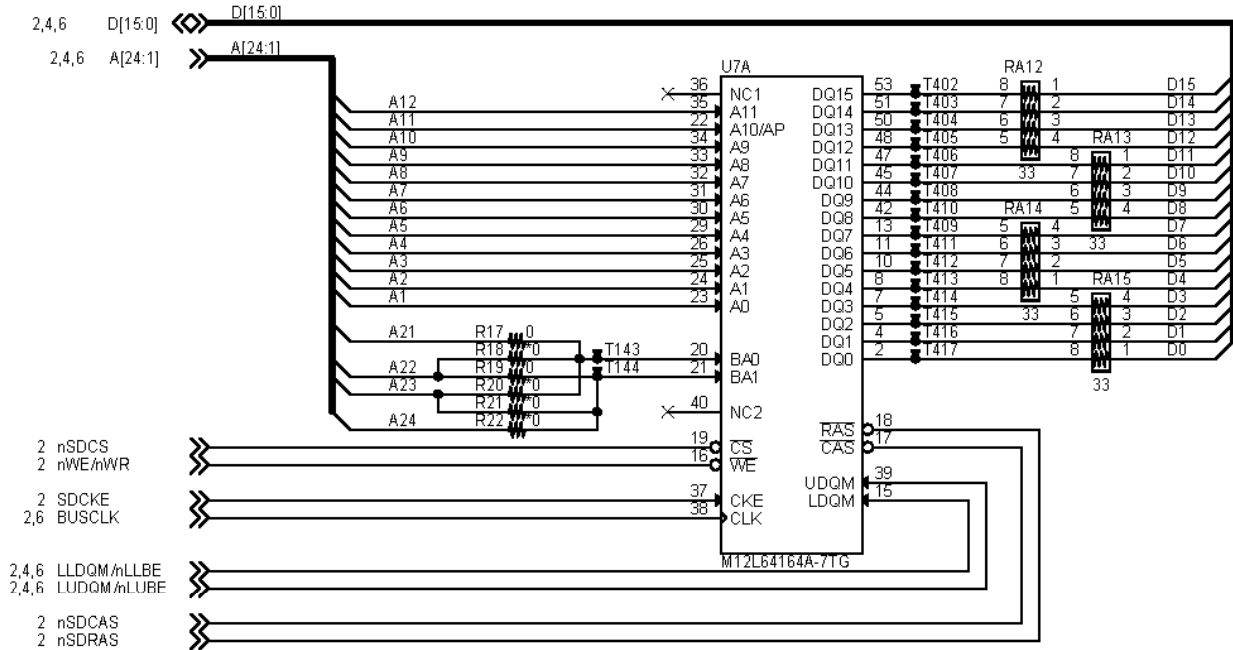


64Mbit or 128Mbit SDRAM

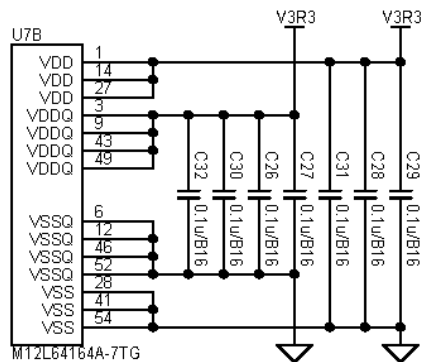


4-1-7. Main Control Board (PF MOTOR)

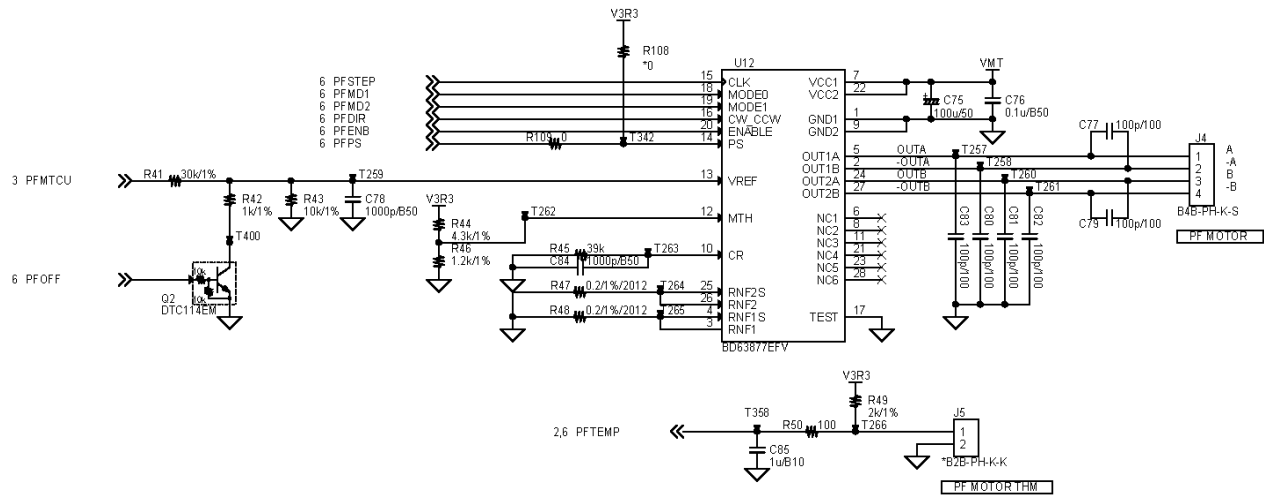


4-1-8. Main Control Board (SENSOR)

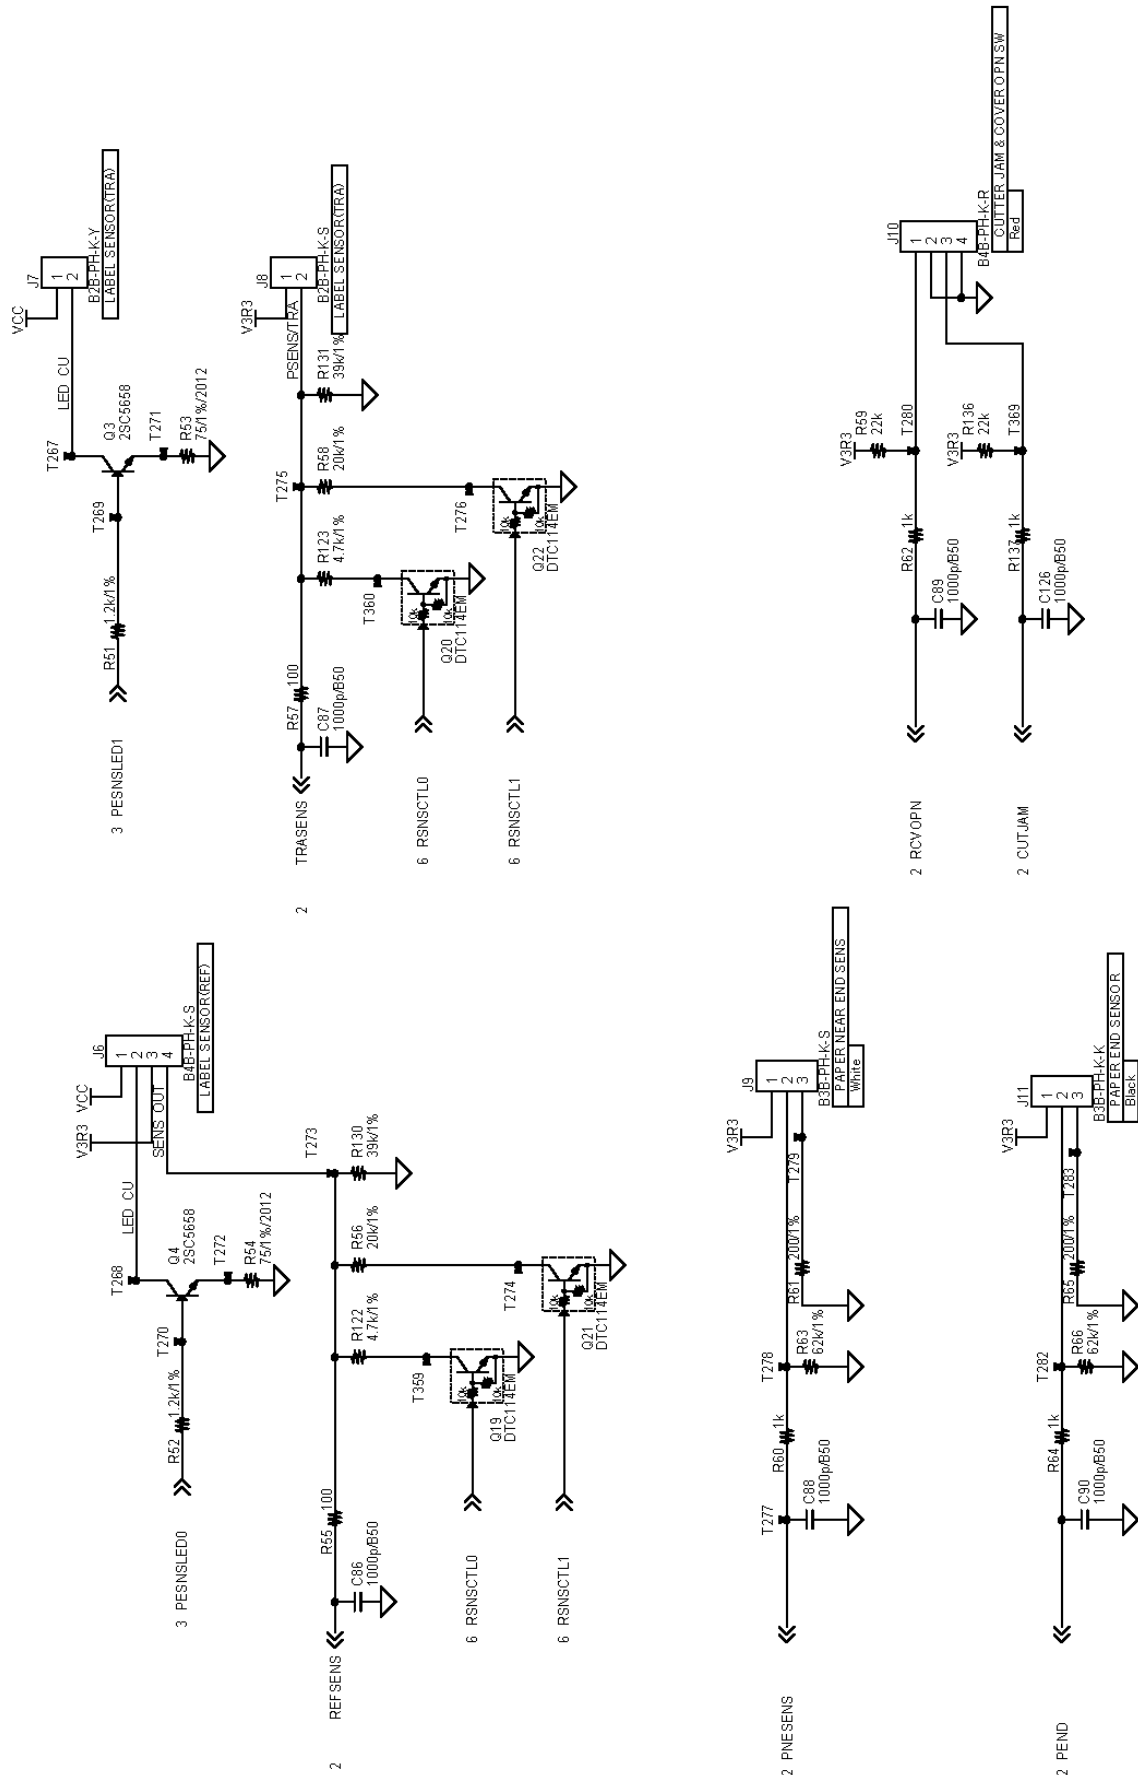


4-1-11. Main Control Board (CUTTER)

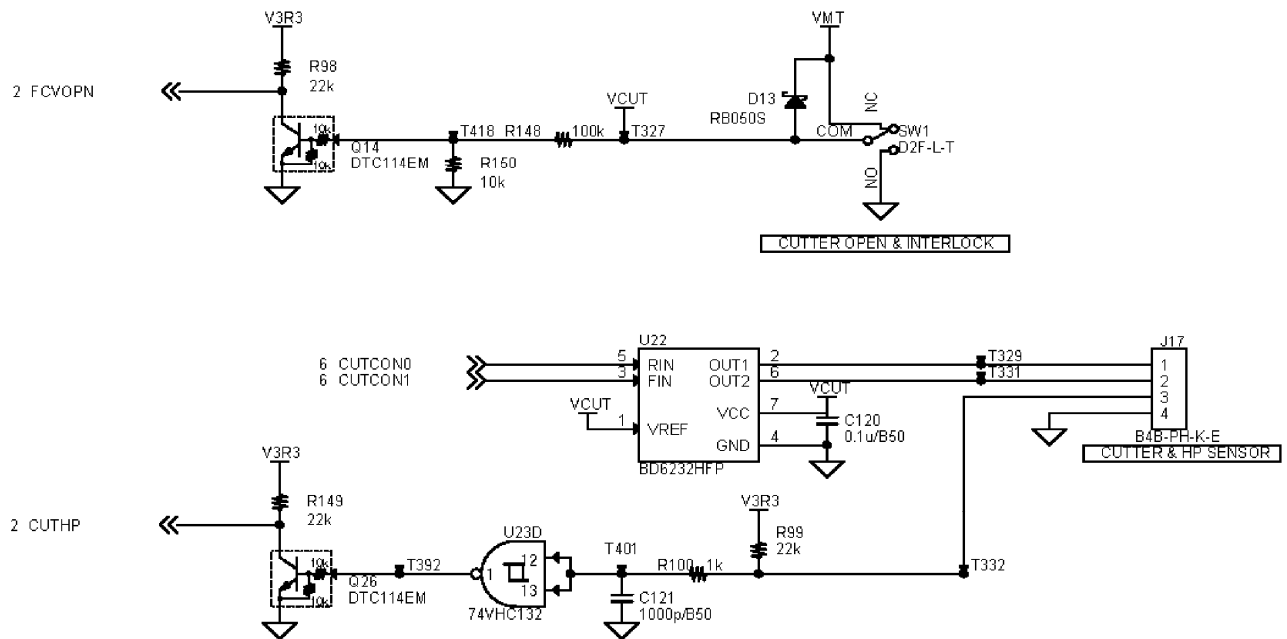


4-2. PE, PNE Sensor

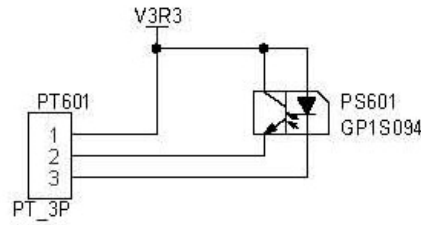


4-3. Operation Panel

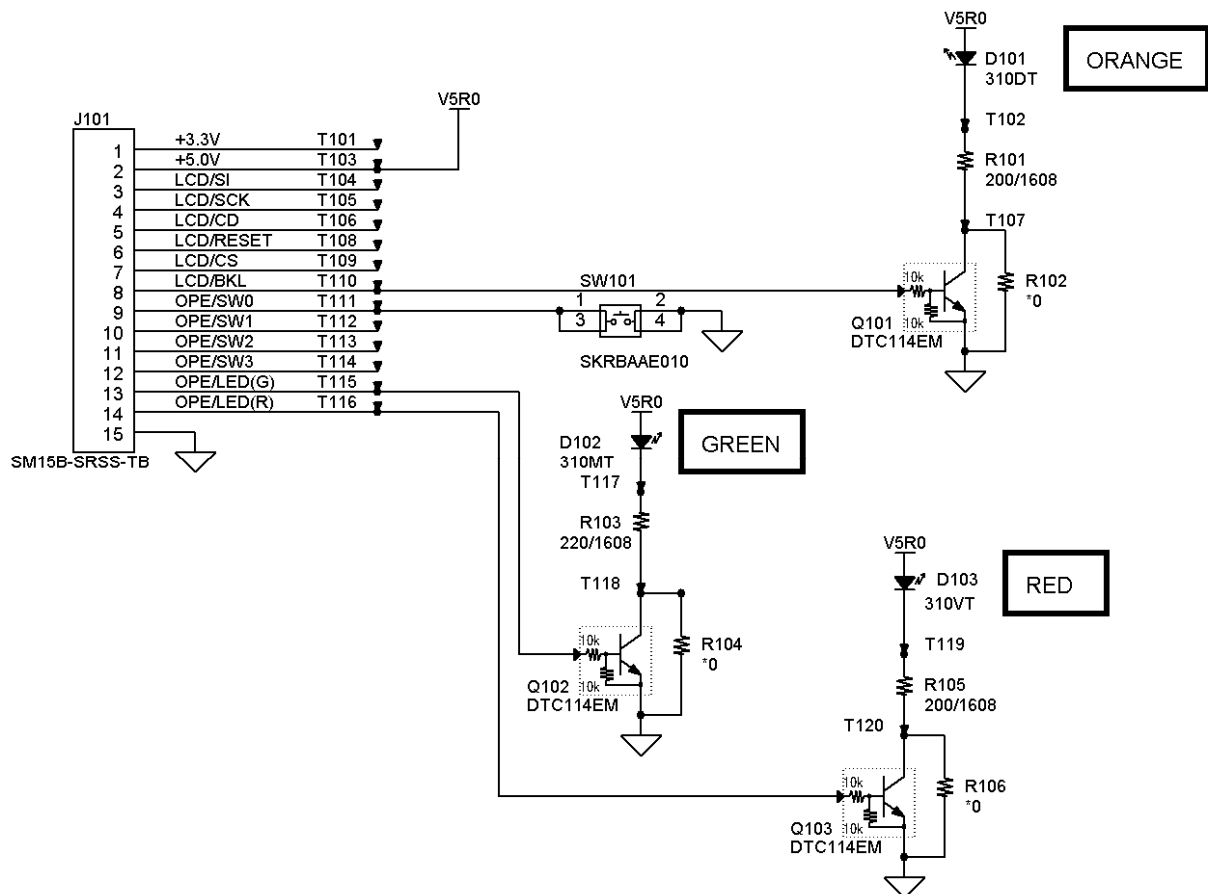


4-4. Serial I/F PCB

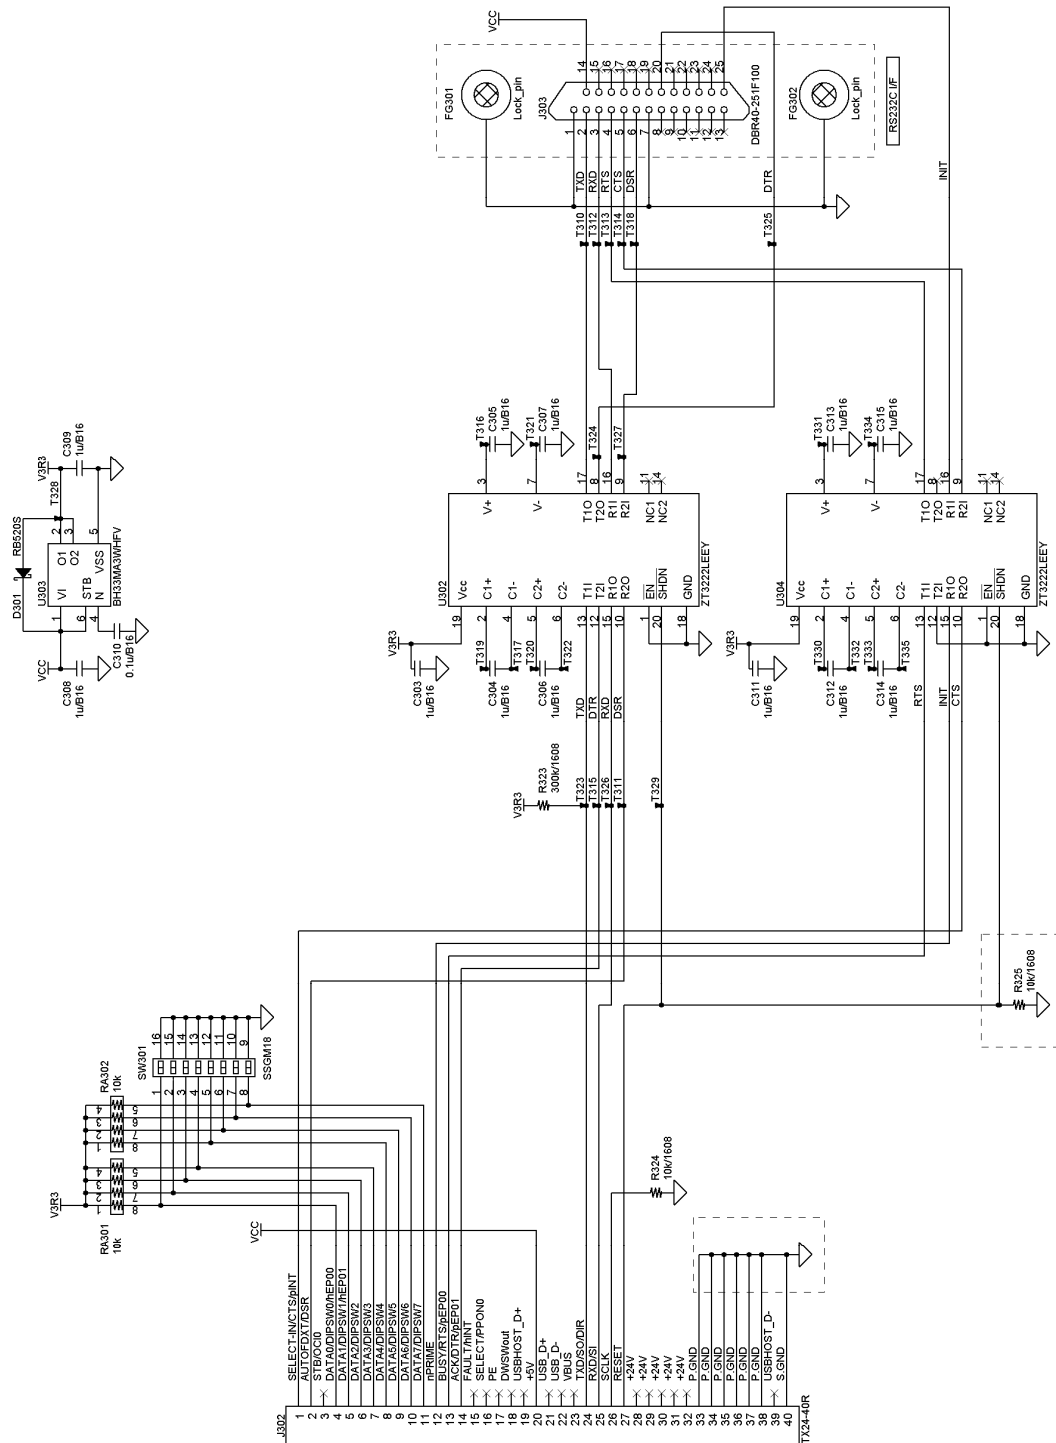


4-5. Parallel I/F PCB

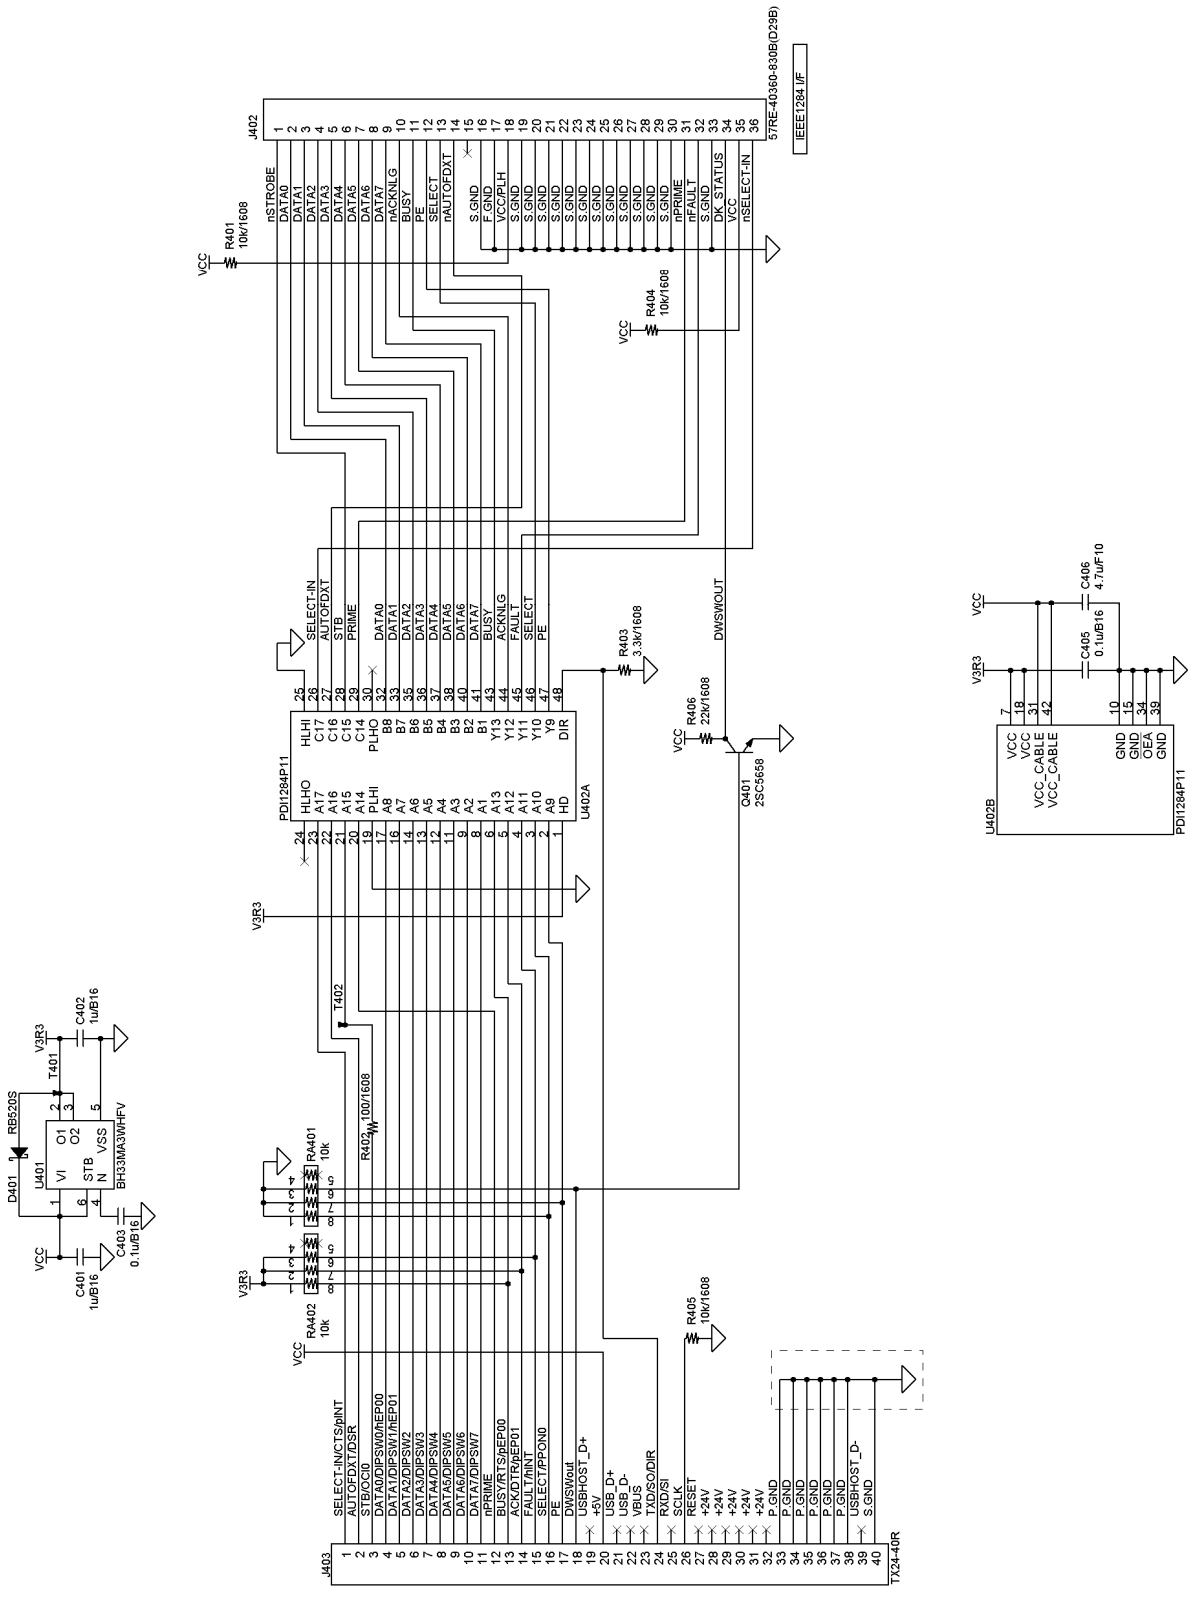


4-6. USB I/F PCB

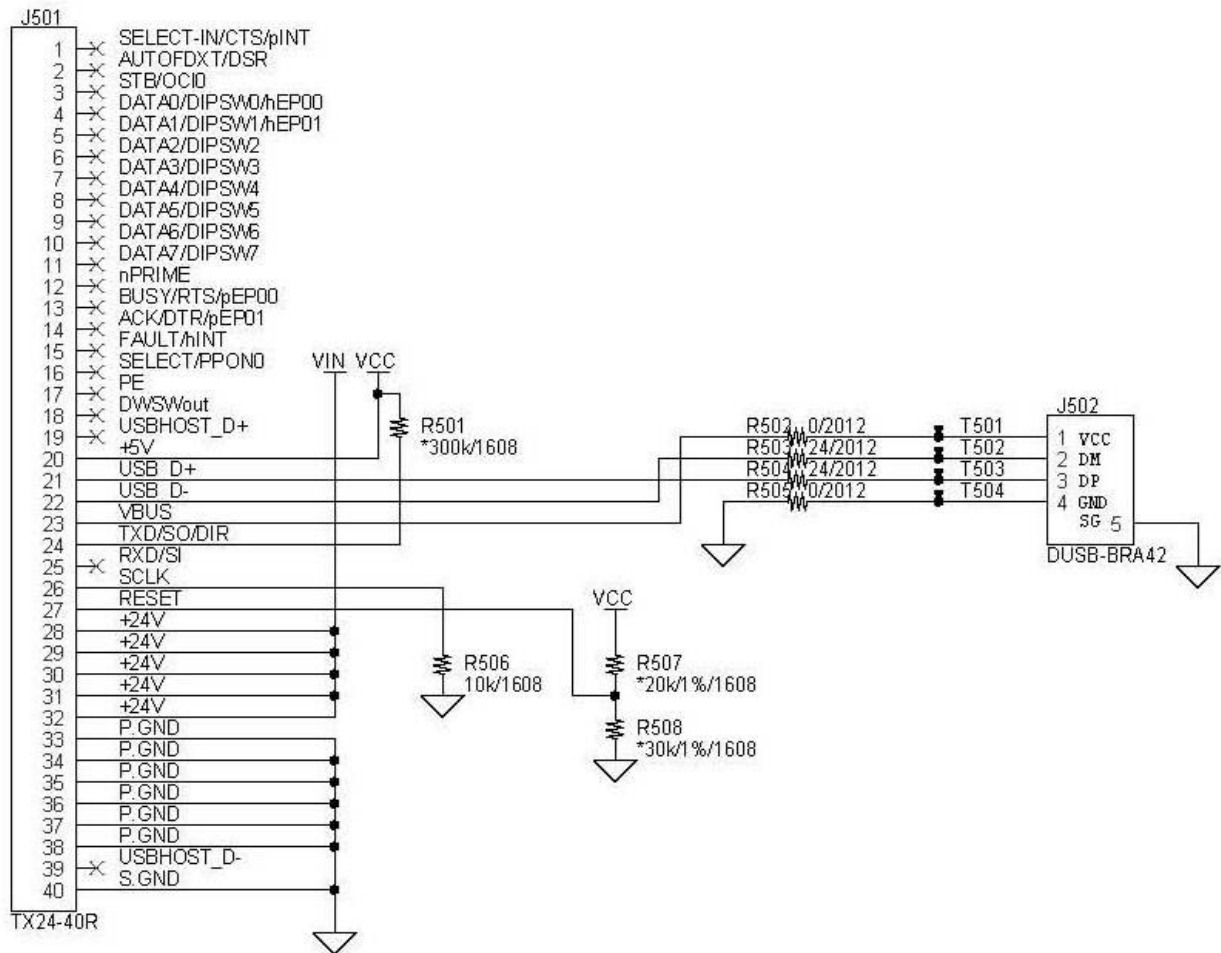

4-7. USB HUB I/F PCB

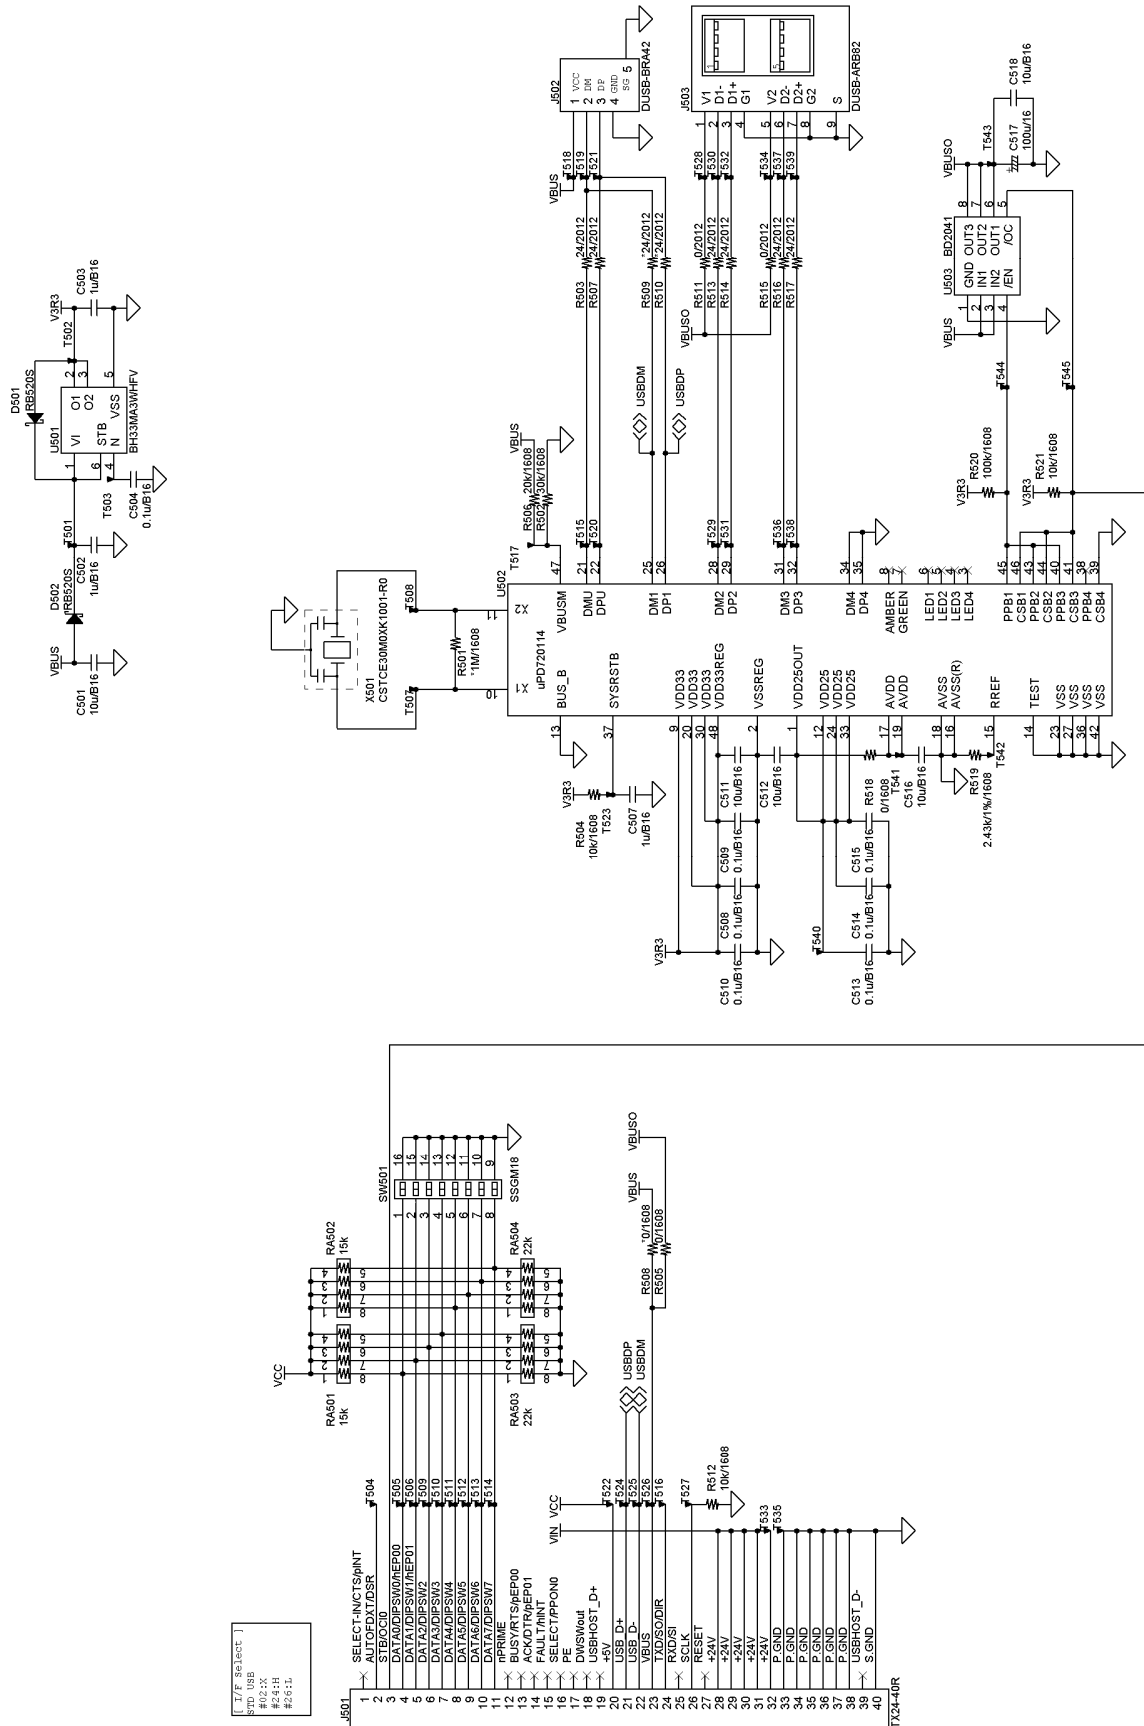


4-8. POWERED USB I/F PCB

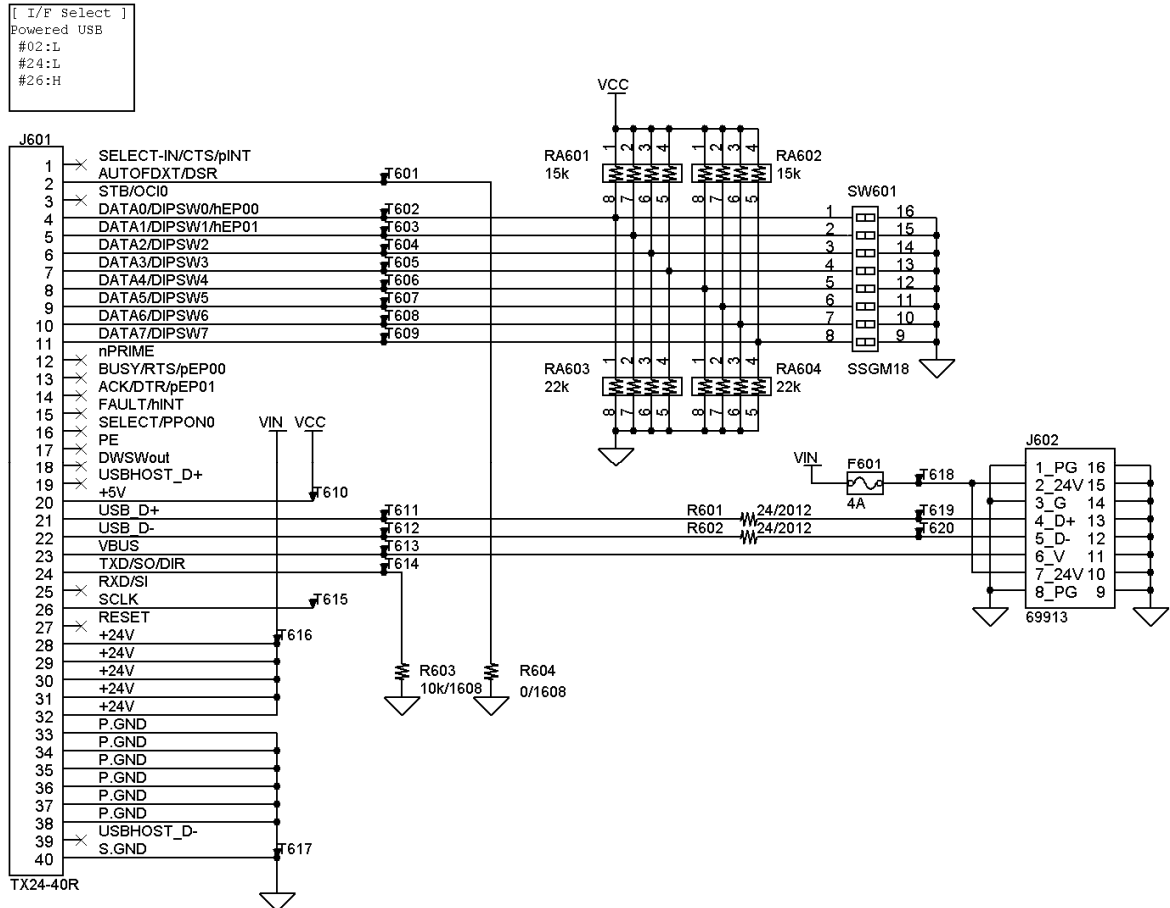


4-9. ETHERNET E Type I/F PCB

4-9-1. CPU1

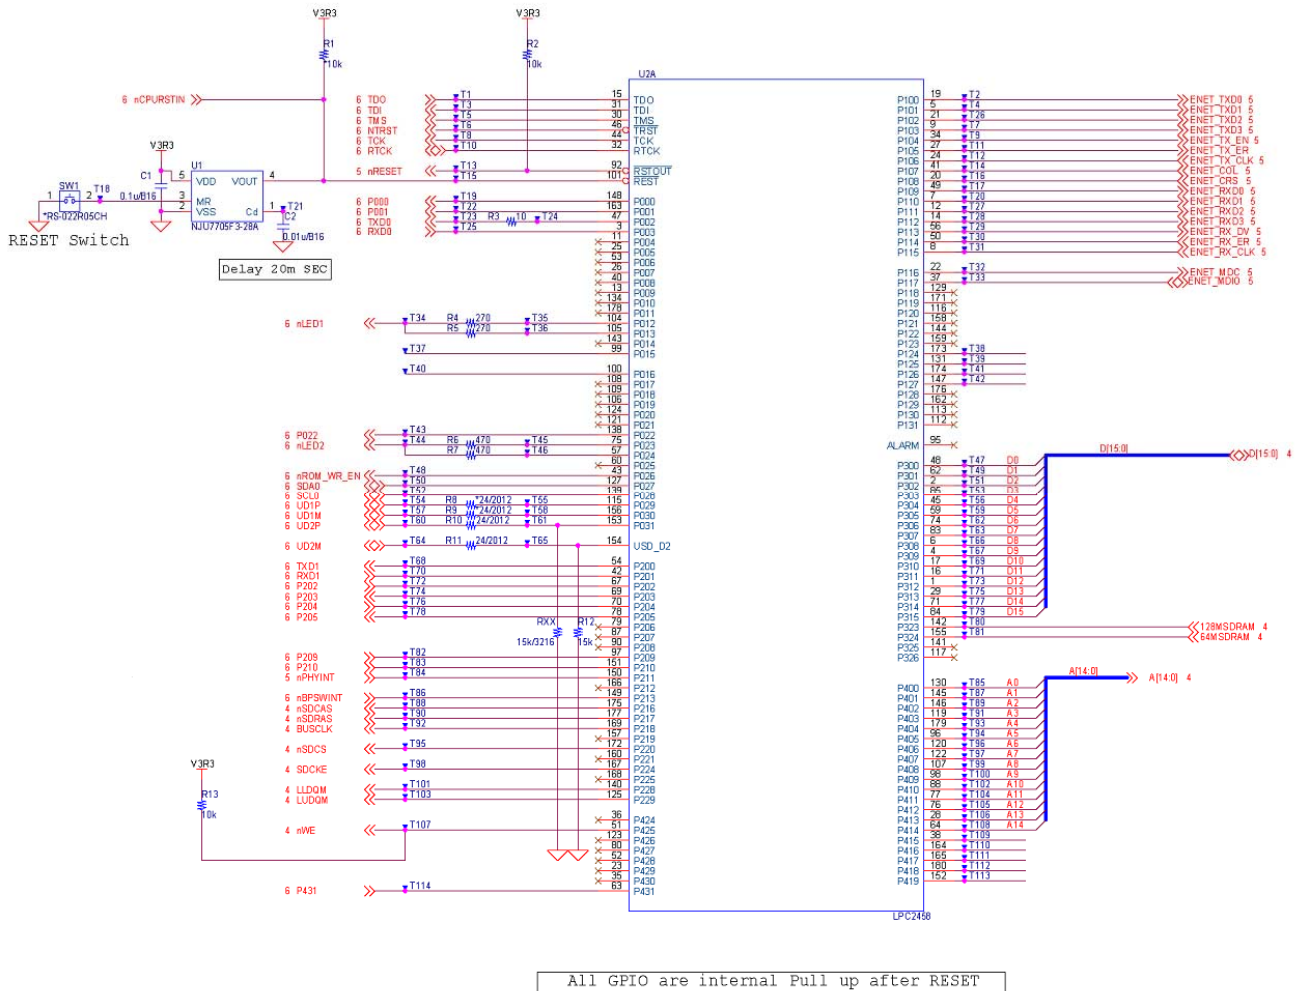

4-9-4. PHY

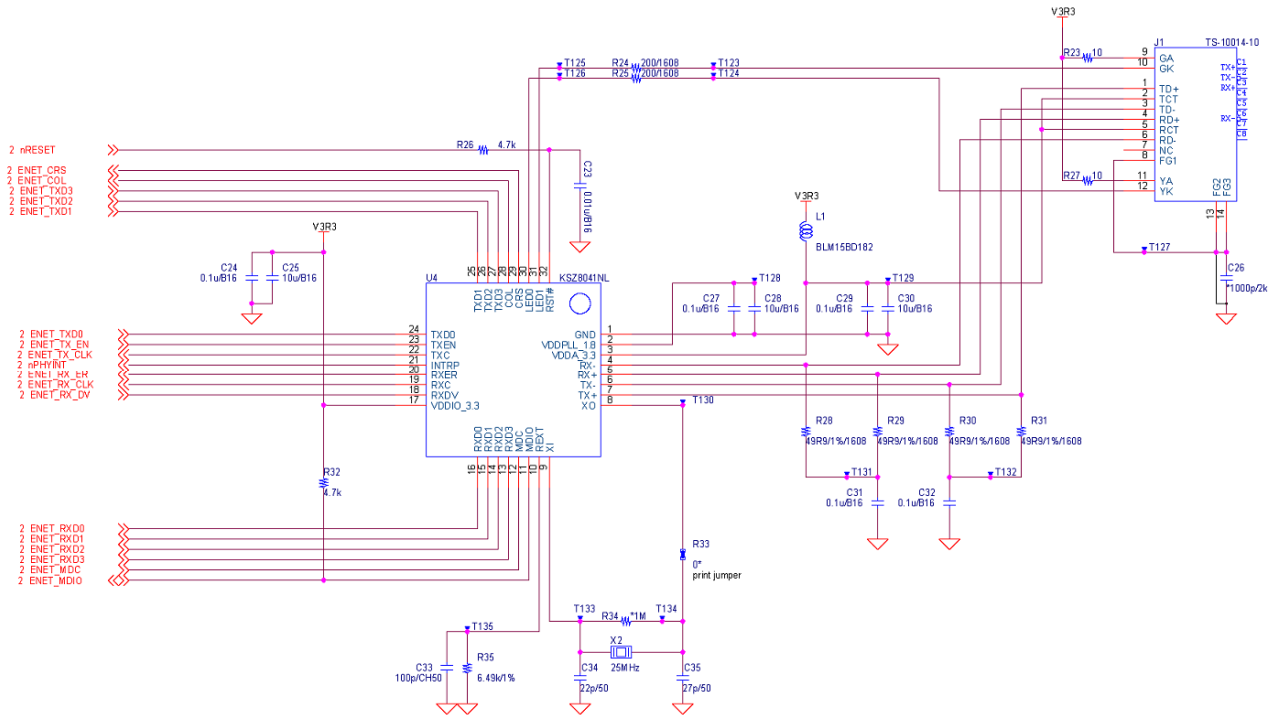

4-9-5. I/F

