


## FBC-6000 Series

The high performance, ergonomic, bar code linear imager.

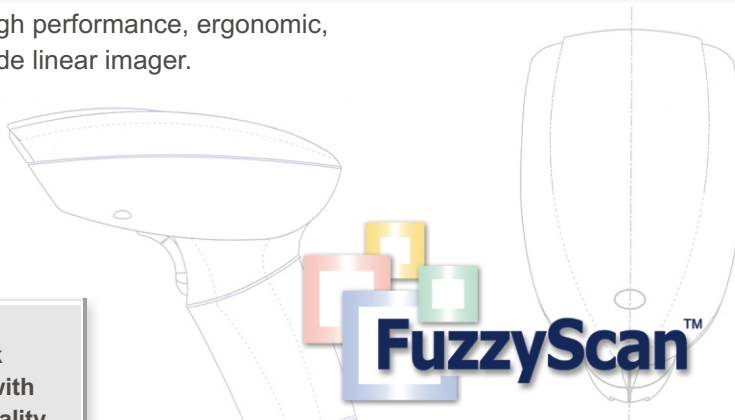

- Highly intelligent DynaTrack system to reader bar code with poor printing contrast or quality
- Bright aiming line for user visibility
- High speed scanning, 300 scans/sec, for snappy bar code capture
- Built-in flash memory for Field Upgrade to ensure investment guaranty
- All-in-one universal host interface for more than 60 host machines, including USB, Notebook PC & IBM ThinkPad keyboard Direct-link
- Capable of Automatic Caps-lock detection & Composed-key emulation
- Unique NeuroFuzzy decoding engine for +/- 200% bar code image tolerance readability
- Useful Windows utility, FuzzyScan PowerTool .NET, capable of performing on-screen configuration, program upgrade, and on-line diagnosis
- Embedded outstanding DataWizard to meet most data editing requirements

The all new FuzzyScan FBC6800HD series Long Range Linear Imager, DyanTrack, has set up a new standard as the bestcost-performance ratio solution for Aim-and-shoot data capture application. Equipped with the innovative DyanTrack ( patent pending )system, the FBC6800HD automatically capture the best possible bar code image through intensive controls among the illumination, image capture, and image processing systems. Advanced optical design gives bright and sharp aiming line, just like laser beam. This has actually brought the FBC6800HD DyanTrack into the application territory used to be considered for laser scanner only!

The famous Neuro Fuzzy decoding platform is now further enhanced by the DyanTrack system to give snappy and accurate readings on various real world bar codes, i.e. Poor printing contrast or quality. All these have made the new FBC6800HD DyanTrack series the best performer among its class. Aimed at high-density data capture, the FBC6800HD series are designed with extra delicate optics. In applications of high-density labels in electronic and fine jewelry industries, the FBC6800HD can easily capture the bar image with elegant aiming line. Up to 2.7-mil reading resolution, FBC6800HD is

pushing the reading performance to top of its class.

To work with wide-spread host systems in the field, the FBC6800HD DyanTrack series are designed with universal interfaces feature. Through easy configuration set up and cable change, the FBC6800HD DyanTrack series can instantly be switched from one host to the other.


This feature has been proofed to save more than 50% inventory capital investment for corporate users where ivarious host systems are used.

While continuously adding new functions and features, PC Worthnever leaves our worldwide partners aside. Via the most advanced electronic technology, the FuzzyScan family has been implemented with flash memory for years. Teamed with the most user-friendly Windows based software utility, the FuzzyScan Power.NET, in the worldwide AIDC industry, every single unit of the FBC6800HD DyanTrack used in any place in the world can be upgraded with our most recent release easily via simple upgrade tool set. This is just part of the long term commitment we made to support our products worldwide. The all new FuzzyScan FBC6800HD series with DynaTrack, the best choice for serious bar code reader users!





## FBC-6000 Series Specification Highlights



Superb bright aiming line for user visibility



Elegant Optional Hand-Free Stand for Counter Top Application



User replaceable interface cable converter to use with various host machines



Cable replacement solution for Legacy Output (PS/2 keyboard, RS 232, USB keyboard and USB Serial )

## Optical

PCS	Typical 0.3 (0.26mm Resolution)	
Resolution	Maximum 0.076mm(3 mil), 0.068mm(2.7mil) capture is possible.	
Depth of Field ( Horizontal=0 degree, Rotation=0 degree, Code 39, PCS=0.9 )	<b>High-density Model ( FBC6860-HD)</b> 3 mil ( 0.076mm )Resolution: up to 3-4 inches 4 mil ( 0.1mm )Resolution: up to 4-5 inches 5 mil ( 0.127mm )Resolution: up to 5-6 inches 10 mil ( 0.25mm )Resolution: up to 7-8 inches 20 mil ( 0.50mm )Resolution: up to 9-10 inches	<b>Long-range Model ( FBC6860-LR)</b> 4 mil ( 0.1mm )Resolution: up to 4-5 inches 5 mil ( 0.127mm )Resolution: up to 5-6 inches 10 mil ( 0.25mm )Resolution: up to 8-9 inches 13 mil ( 0.33mm )Resolution: up to 10-12 inches 20 mil ( 0.50mm )Resolution: up to 12-14 inches
Scan Engine	Long range linear imager with 300 scan/sec scanning speed	
Readable Bar Code Symbologies	Codabar & NW-7 Code 39 & Full ASCII Code 39 Code 32 & IATA UPC/EAN/JAN/CAN w/Addendum Standard & Industrial 2 of 5 Interleaved & Matrix 2 of 5	Code 128 & UCC/EAN-128 Code 11 & Code 93 German ITF Postal Code Mainland China Postal Code Telepen (Numeric & Full ASCII) MSI/Plessey & UK/Plessey

## Operational

Operating Modes	Toggle mode Trigger mode	Force mode Diagnostic mode	Flash mode Level mode	Alternative mode Low power mode
Host Interfaces	Gold Version	IBM PC/XT, PC/AT, PS/2 keyboard wedge Generic PC/AT and PS/2 keyboard direct-link Generic Notebook PC keyboard direct-link Apple MAC and Power MAC ADB keyboard wedge & direct-link Standard/TTL RS-232 peer-to-peer serial interface Standard/TTL RS-232 serial wedge Pseudo (Inverted) RS-232 serial interface Laser emulation & Wand emulation Cino OmniKey & VersaNet direct-link IBM SourOne keyboard wedge & serial interface USB keyboard direct-link IBM ThinkPad keyboard wedge & direct-link		
Universal Model - FBC-6860HD (Gold) FBC-6870HD (Jade)	Jade Version	All host interfaces of Gold model are available for Jade model. IBM PS/55 & PS/V keyboard wedge Hitachi Flora KB1100 & KB3100 keyboard wedge DOS/V keyboard wedge & direct-link Fujitsu FMV keyboard wedge NEC NX notebook keyboard direct-link NEC PC-98xx keyboard wedge Kana-key detection is available for several host interfaces.		
Configuration Setup	Bar code programming manual Windows utility - FuzzyScan PowerTool.NET (Universal models only)			
Data Editing	Condensed DataWizard via bar code programming manual Full-feature DataWizard via FuzzyScan PowerTool.NET (Universal models only)			
Special Features	Built-in flash memory for Field Upgrade via FuzzyScan PowerTool.NET (Available for all Universal models)			
Cable Structure	Lite model : Dedicated main cable with specified connector Universal model : Universal main cable to use with various cable converters			
Light Source	630nm visible red LED			

## Electronical

Power Consumption	Low Power Standby : Maximum 1mA Regular Operation : Typical 150mA (without interface cable converter)
-------------------	----------------------------------------------------------------------------------------------------------

- Specifications are subject to change without notice. All product and company names are trademarks, service marks or registered trademarks of their respective owners.
- Copyright 2002-2006 PC Worth Int'l Co., Ltd. - Cino Group, all rights reserved.

PC WORTH INT'L CO., LTD.

18F, NO.100, HSIN-TAI-WU RD., SEC.1, HSI-CHIH,  
TAIPEI, TAIWAN, 22147, R.O.C.

TEL: 886-2-2696-2559 FAX: 886-2-2696-2560



Doc No. DBR-A50304-002

cino